

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Pentek 4283* at our website: ***Click HERE***

Model 4275B

32-Channel 16-bit 100 kHz A/D Converter MIX Module

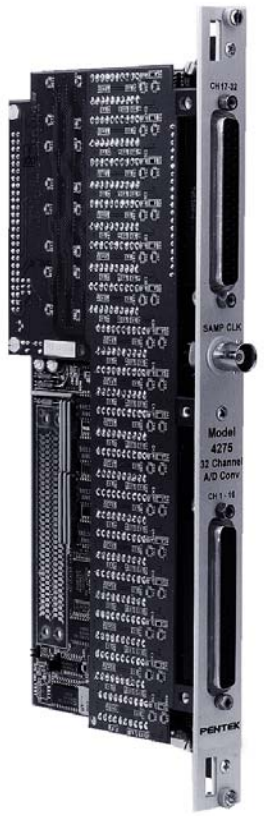

Features

- Up to 100 kHz sampling rate with all 32 channels active
- 16-bit resolution with 90 dB signal-to-noise performance
- Integral linear-phase, anti-aliasing filters
- Ideal for high-performance multichannel systems
- Available with differential inputs

Ordering Information

Model	Description
4275B	32-Channel 16-bit A/D MIX module
Options:	
-007	Differential inputs
-008	±10.0 V full scale input voltage range

General Information

Model 4275B is a 32-channel A/D converter MIX module. It features 32 individual sigma-delta A/D converters with 16-bit resolution, sampling rates to 100 kHz and built-in signal conditioning. The 4275B is a replacement for the 4275 and 4275A. Contact Pentek for more information.

Input Signal Connections

Each of the 32 inputs is buffered by either a single-ended or differential amplifier stage (see Specifications for available options). Front panel DB 37 connectors provide a convenient method for attaching signal inputs via flat ribbon cable or discrete wiring harnesses.

Signal Conditioning Built in

Following the amplifier section are 32 A/D converters, one for each input signal. These converters utilize sigma-delta technology incorporating both the sampling function and a powerful digital filtering scheme.

The digital filtering section performs the anti-aliasing functions, thereby eliminating the need for separate, external low pass filters in most applications. Another major benefit is the linear phase response of these filters, very useful for processing multisensor array signals such as those found in sonar applications, or on-line machine monitoring.

Signal-to-noise performance is typically 90 dB with peak spurious components typically better than 90 dB below full scale for signal bandwidths up to 45 kHz.

Specifications

Input: single-ended inputs, ±5.0 V full scale, 10 kohm impedance
Option -007: differential inputs, ±5.0 V full scale, 100 kohm impedance
Option -008: single-ended inputs, ±10.0 V full scale, 10 kohm impedance

Max. input voltage: 2 x F.S. input voltage with respect to ground

Input stage frequency response: ±0.5 dB, 10 Hz to 45 kHz

Input channels: software programmable from one to 32

Input connectors: two 37-pin (DB 37) female, compatible with standard DB 37 male connectors

Sigma-delta filters: digital lowpass, passband tracks at 45.35% of sampling rate with ±0.003 dB ripple; stopband tracks at 55% of sampling rate with >100 dB attenuation; 0 µs variation group delay

A/D conversion: 16 bits, 88 dB min. SNR; harmonic and IM components 85 dB below full scale

A/D output coding: 16-bit, 2's complement


Sampling rates: 13 selectable frequencies from 6.25 kHz to 100 kHz from internal oscillator or external TTL sample clock at 64, 128 or 256 times the desired sampling rate

FIFO: 16 ksample x 32 bits between A/D and MIX bus

MIX interface: FIFO output - one 16-bit sample per transfer in non-packed mode; two 16-bit samples per transfer in packed mode; status/control and interrupt mask registers; sample clock control; interrupts on FIFO full, half-full, empty

Power: 3.0 A at +5 V; 0.2 A at +12 V, 0.2 A at –12 V from the MIX bus

Block Diagram, Model 4275B

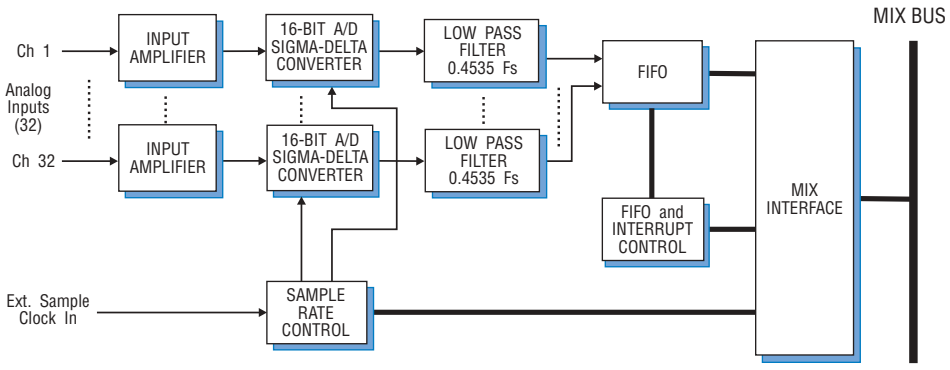

PENTEK
Pentek, Inc., One Park Way ◆ Upper Saddle River, NJ 07458 ◆ Tel 201-818-5900
Fax 201-818-5904 ◆ Email: info@pentek.com
www.pentek.com

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP