



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗


### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)

# AG-51

## Audio Generator

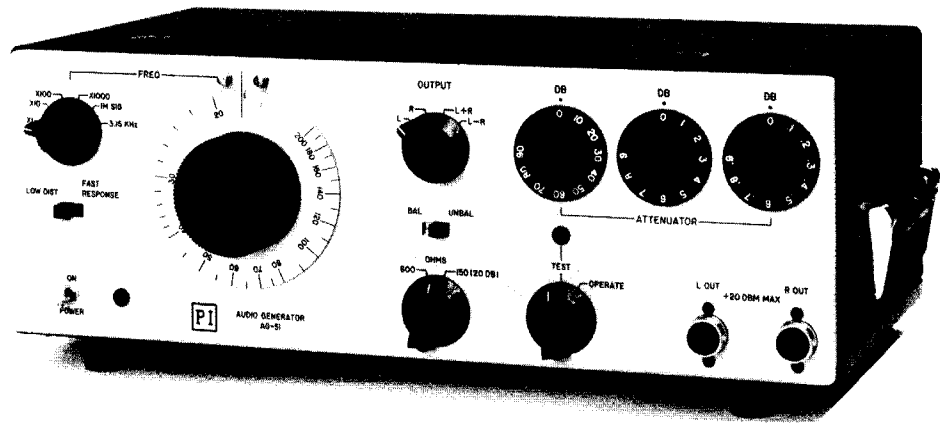

### Key Features

- Transformerless Stereo Outputs (balanced or unbalanced)
- Output Level
  - +20 dBm across 600 ohms
  - 0 dBm across 150 ohms
- Stereo Matrix Switch
  - L, R, L-R, L+R
- Precision 10 dB, 1.0 dB, and 0.1 dB Step Attenuators
- High Level of RF Shielding

### Description

The AG-51 Audio Generator contains a low distortion 20 Hz to 200 kHz sine wave generator, an SMPTE standard intermodulation signal generator and a fixed frequency sine wave generator at 3.15 kHz for wow and flutter tests. Signal outputs are simultaneously available at levels of up to +20 dBm (equivalent sine wave power for complex signals) at separate left (L OUT) and right (R OUT) output connectors. Outputs may be selected for left (L) only, right (R) only, left and right in phase (L+R), and left and right in phase opposition (L-R). Fully balanced or unbalanced outputs at impedance levels of 150 ohms or 600 ohms are front panel selectable. Three precision attenuators (10, 1.0 and 0.1 dB) provide a dynamic range of 99.9 dB in 0.1 dB steps. Attenuator dials display the output level directly in dBm in the 150 ohm source impedance configuration. Automatic output leveling circuitry with a built-in self-test feature

provides a constant output level thereby eliminating the need for output metering. In the TEST mode the generator output level is reduced to zero, a useful feature during noise measurements.

The time constant of the leveling control loop is determined by a front panel switch. For rapid frequency response measurements, this switch is set to the FAST RESPONSE position. This feature enables the operator to evaluate frequency response of the device under test (amplifier, filter, etc.) with a manual sweep of the frequency dial and multiplier switch. For distortion measurements, the switch is set to the LOW DIST position. This mode of operation provides minimum distortion with a slightly longer control loop time constant for accurate signal analysis at any specific frequency.

PI

## Potomac Instruments

# AG-51 Specifications

<b>FREQUENCY RANGE</b>	20 Hz to 200 kHz in four decade ranges	<b>ATTEN. RANGE</b>	0 to 99.9 dB in 0.1dB steps
<b>OUTPUTS</b>		<b>ATTEN. ACCURACY</b>	
L	Left only	0 to 10 db	±1.5% of attenuation in dB
R	Right only	>10 dB	±0.2 dB (maximum)
L + R	Left & Right in phase	<b>INTRINSIC DISTORTION*</b>	
L - R	Left and Right 180° out of phase	<b>Harmonic</b>	<b>Low Distortion</b> <b>Fast Response</b>
IM SIG	Composite 60 Hz and 7 kHz @ 4:1 ratio (SMPTE Standard)	20 Hz to 10 kHz	< 0.05%    < 1%
3.15 KHz	Fixed wow and flutter signal, (IEEE Standard 193-1971)	10 kHz to 20 kHz	< 0.08%    < 1%
		<b>Intermodulation</b>	<0.03%
<b>OUTPUT IMPEDANCE</b>		<b>Incidental FM(3.15 kHz)</b>	<0.01%
Unbalanced	150 or 600 ohms, switch selected	<b>HUM and NOISE</b>	>80 dB below rated output
Fully Balanced	150 or 600 ohms, switch selected	<b>DIAL ACCURACY</b>	±3%
<b>OUTPUT LEVEL(no atten.)</b>		<b>POWER</b>	117 Vac, (230 Vac option) 50/60 Hz, 9 W
Sine Wave Signals	+20 dBm (7.75 V) across 600 ohm load, 15.5 V open circuit 0 dBm (0.387 V) across 150 ohm load, 0.774 V open circuit	<b>WEIGHT</b>	
IM Signal	Peak-to-peak voltage of composite waveform is equal to peak-to-peak voltage of +20 dBm sine wave across 600 ohm load, 0 dB sine wave across 150 ohm load	with cover, lb. (kg)	12 (5.44)
<b>OUTPUT LEVEL ACCURACY</b>		<b>DIMENSIONS in. (cm)</b>	15.25 (38.74) W, 5.25 (13.34) H, 10.13 (25.75) D
	± 0.2 dB (20 Hz - 100 kHz) ± 0.5 dB (100 kHz - 200 kHz)	<b>Optional Rack Mount</b>	5.25 (13.34) Rack space reqd.

\* Slightly higher at R output in L-R, UNBAL mode.

*Specifications subject to change without notice.*

**PI**

**Potomac Instruments, inc.**

932 Philadelphia Avenue, Silver Spring, Maryland 20910 • (301) 589-2662 • FAX (301) 589-2665

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | [www.artisantg.com](http://www.artisantg.com)



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)