



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)

# E-463

## HVPZT Piezo Amplifier, 3 Channels



E-463.00

- 3 Independent Channels
- 3 x 6 W Peak Power
- 3 LED Voltage Displays
- Output Voltage Range 0 to -1500 V

The E-463.00 is a bench-top piezo driver for high-voltage PZTs. It contains three independent low-noise, 4-quadrant amplifiers that can output and sink a peak current of 4 mA and an average current of 3 mA each. The E-463.00 can be operated in two ways:

### I. Manual Control:

Output voltage for each channel can be set by a 10-turn DC-

offset potentiometer in the range of 0 to -1000 V.

### II. External Control:

Output voltage is controlled by an analog signal applied to the BNC inputs, ranging from 0 to 10 V. Multiplying by the gain factor of -150, an output voltage range of 0 to -1500 V results. The DC-offset potentiometer adds a DC bias to the input, allowing continuous shifting of

### Ordering Information

**E-463.00**  
HVPZT Amplifier, 3 Channels,  
Bench-Top

Ask about custom designs!


the input range between 0 V to +10 V and -6.66 V to 3.33 V (see page 6-52).

Three 3½-digit LED displays show the output voltage of each individual channel. For frequency response with selected HVPZTs, see graph below.

For computer-controlled closed-loop positioning electronics, refer to the E-500 system starting on page 6-18.

### Technical Data

Models	E-463.00
Function	Power amplifier
Channels	3
Maximum output power	6 W / channel (see page 6-52)
Peak output current <5 ms	4 mA / channel
Average output current >5 ms	2 mA / channel
Current limitation	Short-circuit proof
Voltage gain	-150 ±1
Polarity	Negative
Control input voltage	0 to +10 V
Output voltage	0 to -1500 V
DC-offset setting	0 to -1000 V at output with 10-turn pot.
Input impedance	1 MΩ
Display	3 x 3½-digits, LED
Control input sockets	3 x BNC
PZT voltage output sockets	3 x LEMO ERA.0A.250.CTL
Dimensions	236 x 88 x 273 mm + handles (see page 6-10)
Weight	4.3 kg
Operating voltage	90-120 / 220-240 VAC, 50-60 Hz (linear P/S)

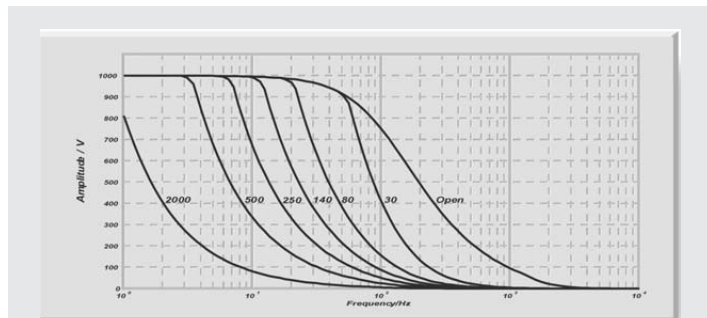

E-463, frequency response with various PZT loads. Values shown are capacitance in nF, measured in actual PZT.



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)