ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Pilz PSS1 DIO T* at our website: *Click HERE*

Digital Input/Output

PSS DIO T, PSS1 DIO T

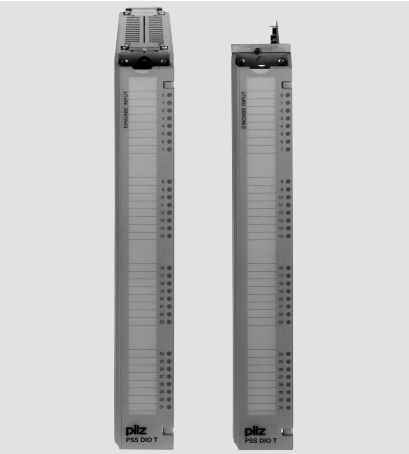

Digital input and output circuits / test pulses with integral software algorithms and redundant design for safety-related functions.

Features

- Failsafe modules have type-approval
- Whole system is approved by BG and TÜV
- 16 digital inputs
- 16 digital outputs (2 A) or pulsed outputs
- Galvanic isolation for a high level of noise suppression
- Integral protection circuits for trouble-free installation

Approvals

	PSS DIO T	PSS1 DIO T
BG	●	●
TÜV PRODUCT SERVICE	●	●
GASTEC	●	
UL LISTED	●	●
AIBV	●	

Technical Details	PSS DIO T	PSS1 DIO T
Function	Digital input/output	
Application Range	Failsafe applications conforming to EN 954-1, 11/94, DIN V 19 250, 01/89, DIN VDE 0116	
Electrical Data		
Supply Voltage	24 VDC	24 VDC
Tolerance Range	20 ... 30 VDC including residual ripple	
Galvanic Isolation	Yes (optocoupler)	Yes (optocoupler)
Connection Type	AWG 12 screw connectors	
Outputs		
Number	16 (can also be used as test pulses)	
Potential Isolation	In groups of 8	In groups of 8
Output Current at “1”	2 A	2 A
Permitted Current	0 ... 2.5 A	0 ... 2.5 A
Short Circuit Protection	Electronic	Electronic
Limitation of Inductive Switch-off at the Load	ca. U_B -42 VDC	ca. U_B -42 VDC
Simultaneity	100 % up to max. 10 A per block of 8	
Residual Current at “0”-Signal	0 mA	0 mA
Signal Level at “0”	0 VDC	0 VDC
Signal Level at “1” and 2.5 A Load	U_B -1 VDC	U_B -1 VDC
Output Switch Delay	50 µs	50 µs
Status Indicator	LED	LED
Inputs		
Number	16	16
Potential Isolation	Yes	Yes
Signal Level at “0”	-3 ... +5 VDC	-3 ... +5 VDC
Signal Level at “1”	+15 ... +30 VDC	+15 ... +30 VDC
Input Current	Typ. 6 mA	Typ. 6 mA
Input Delay	< 1 ms	< 1 ms
Status Indicator	LED	LED
Mechanical Data		
Size (H x W x D)	257 x 41 x 220 mm	265 x 41 x 218 mm
Space Requirement	1 slot	1 slot
Weight	1120 g	640 g
Environmental Data		
Protection Type	IP 20, installed on module rack	
Ambient Temperature	0 ... +60 °C	0 ... +60 °C
Storage Temperature	-25 ... +70 °C	-25 ... +70 °C
Climatic Suitability	IEC 68-2-30, IEC 68-2-14	
Condensation	Not permitted	
Vibration to IEC 68-2-6	Frequency range: 10 ... 100 Hz Amplitude: 0.1 mm, max. 5 g	

For Press

Pilz GmbH & Co., Felix-Wankel-Straße 2, 73760 Ostfildern, Deutschland
Telefon +49 (7 11) 34 09-0, Telefax +49 (7 11) 34 09-1 33, E-Mail: pilz.gmbh@pilz.de

Digital Input/Output
PSS DIO T, PSS1 DIO T

Description

The PSS 3000/PSS 3100 can process the status of inputs and outputs in bits, bytes or words. Each input and output has space available for inscription and a status LED.
The inputs (see also PSS DI, PSS1 DI) are suitable for connecting:

- single-channel safety-related input devices, with or without test pulse
- dual-channel safety-related input devices, with or without test pulses

Please note that if the outputs on the module are being used to generate test pulses, the module's inputs cannot use these pulses.
The outputs (see also PSS DO, PSS1 DO) are suitable for connecting:

- resistive and inductive loads with a max. 2 A

In groups of 8, the outputs can be used to generate test pulses (pulsed signals). This means that, in conjunction with failsafe inputs (e.g. PSS DI), the external wiring can be monitored for shorts across the input contacts and external power sources.
Input devices and loads are connected via plug-in screw connectors. The module's address is established by its slot number on the module rack.

Order References	PSS DIO T	PSS1 DIO T
System	PSS 3000	PSS 3100
Description	PSS DIO T	PSS1 DIO T
Order Number	301 107	302 107

For spares

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP