ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Powerex PM75RHA060* at our website: ***Click HERE***


PM75RHA060

T-57-29


Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

Intellimod™-3 Modules

Three Phase + Brake
IGBT Inverter Output
75 Amperes/110-230 Volt Line

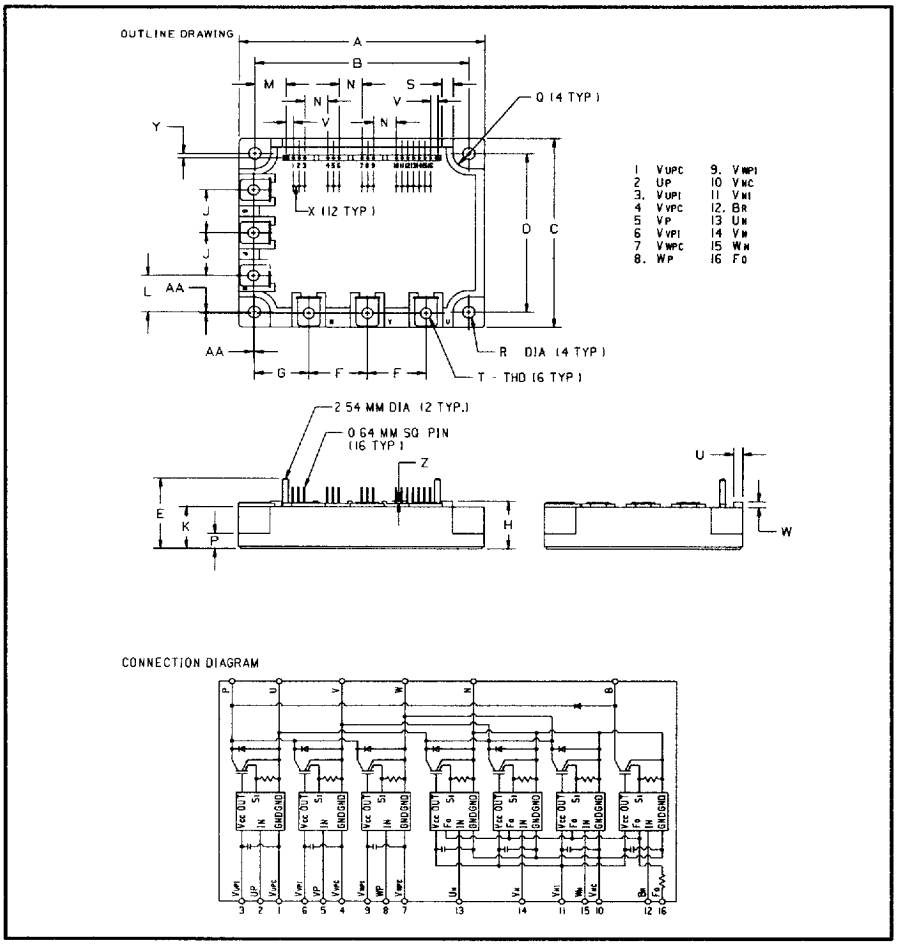

110-230 Volt Line, PM75RHA060 Outline Drawing

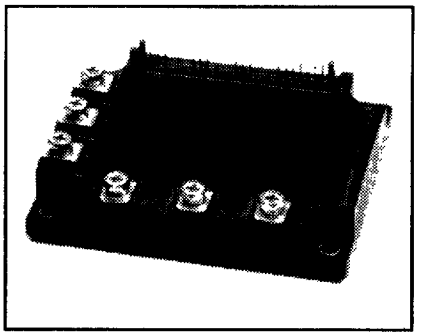

Dimensions	Inches	Millimeters
A	4.29±0.04	109.0±1.0
B	3.74±0.02	95.0±0.5
C	3.46±0.04	88.0±1.0
D	2.91±0.02	74.0±0.5
E	1.28	32.6
F	1.02	26.0
G	0.94	24.0
H	0.87	22.0
J	0.79	20.0
K	0.76	19.4
L	0.67	17.0
M	0.54	13.8
N	0.4	10.16

Dimensions	Inches	Millimeters
P	0.28	7.0
Q	0.38 R	7.0 R
R	0.22 Dia.	5.5 Dia.
S	0.2	5.0
T	M5 Metric	M5
U	0.16	4.0
V	0.127	3.22
W	0.1	2.6
X	0.1	2.54
Y	0.08	2.0
Z	0.04	1.0
AA	0.02	0.5

Description

Powerex Intellimod-3 Modules are designed for applications requiring a high frequency (20kHz) output switching inverter. The modules are isolated from the baseplate, consisting of complete drive, control and protection circuitry for the IGBT inverter.

Features:

- ☐ Complete Output Power Circuit
- ☐ Gate Drive Circuit
- ☐ Protection Logic
  - Short Circuit
  - Over-Current
  - Over Temperature
  - Under Voltage

Applications:

- ☐ Inverters
- ☐ Small UPS
- ☐ Motion/Servo Control
- ☐ AC Motor Control

Ordering Information

PM75RHA060

This Material Copyrighted By Its Respective Manufacturer
http://store.iiic.cc/

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

T-57-29

PM75RHA060
Intellimod-3 Modules
Three Phase + Brake IGBT Inverter Output
75 Amperes/110-230 Volt Line

Absolute Maximum Ratings, T_j = 25 °C unless otherwise specified

Characteristics	Symbol	PM75RHA060	Units
Power Device Junction Temperature	T_j	-20 to +150	°C
Storage Temperature	T_{STG}	-40 to +125	°C
Case Operating Temperature	T_C	-20 to +100	°C
Mounting Torque, M5 Mounting Screws	—	17	Kg-cm
Mounting Torque, M5 Main Terminal Screws	—	17	Kg-cm
Module Weight (Typical)	—	550	Grams
Supply Voltage Protected by OC and SC (V_D = 13.5 - 16.5V, Inverter Part)	$V_{CC(prot)}$	400	Volts
Isolation Voltage AC 1 minute, 60Hz	V_{RMS}	2500	Volts
Control Sector			
Supply Voltage Applied between (V_{UP1} - V_{UPC}, V_{VP1} - V_{VPC}, V_{WP1} - V_{WPC}, V_{N1} - V_{NC})	V_D	20	Volts
Input Voltage Applied between (U_P, V_P, U_N, V_N, W_N, B_r)	V_{CIN}	20	Volts
Fault Output Supply Voltage	V_{FO}	20	Volts
Fault Output Current	I_{FO}	20	mA
IGBT Inverter Sector			
Collector-Emitter Voltage Fig. 1	V_{CES}	600	Volts
Collector Current ±	I_C	75	Amperes
Peak Collector Current ±	I_{CP}	150	Amperes
Supply Voltage (Applied between P - N)	V_{CC}	400	Volts
Supply Voltage (Surge) Applied between P - N	$V_{CC(surge)}$	500	Volts
Collector Dissipation	P_C	312	Watts
Brake Sector			
Collector-Emitter Voltage Fig. 1	V_{CES}	600	Volts
Collector Current ±	I_C	30	Amperes
Peak Collector Current ±	I_{CP}	60	Amperes
Supply Voltage (Applied between P - N)	V_{CC}	400	Volts
Supply Voltage (Surge) Applied between P - N	$V_{CC(surge)}$	500	Volts
Collector Dissipation	P_C	208	Watts
Diode Forward Current	I_F	30	Amperes
Diode DC Reverse Voltage	$V_{R(DC)}$	600	Volts

This Material Copyrighted By Its Respective Manufacturer
http://store.iiic.cc/

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

T-57-29

PM75RHA060
Intellimod-3 Modules
Three Phase + Brake IGBT Inverter Output
75 Amperes/110-230 Volt Line

Electrical Characteristics, T_j = 25 °C unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Control Sector						
Overcurrent Trip Level Inverter Part	OC	-20°C ≤ T ≤ 125°C, V_D = 15V	115	161	–	Amperes
Overcurrent Trip Level Brake Part			39	53	–	Amperes
Short Circuit Trip Level Inverter Part	SC	-20°C ≤ T ≤ 125°C, V_D = 15V	–	241	–	Amperes
Short Circuit Trip Level Brake Part			–	79	–	Amperes
Over Current Delay Time	$t_{off(OC)}$	V_D = 15V, Fig. 7	–	10	–	µS
Over Temperature Protection	OT	Trip Level	111	118	125	°C
Over Temperature Protection	OT_R	Reset Level	–	100	–	°C
Supply Circuit Under Voltage Protection	UV	Trip Level	11.5	12.0	12.5	Volts
Supply Circuit Under Voltage Protection	UV_R	Reset Level	–	12.5	–	Volts
Supply Voltage	V_D	Applied between V_{UP1} - V_{UPC}, V_{VP1} - V_{VPC}, V_{WP1} - V_{WPC}, V_{N1} - V_{NC}	13.5	15	16.5	Volts
Circuit Current	I_D	V_D = 15V, V_{CIN} = 15V, V_{N1} - V_{NC}	–	80	120	mA
	I_D	V_D = 15V, V_{CIN} = 15V, V_{XP1} - V_{XPC}	–	25	35	mA
Input On Voltage	$V_{CIN(on)}$	Applied between V_{UP1} - V_{UPC}, V_{VP1} - V_{VPC}, V_{WP1} - V_{WPC}, V_{N1} - V_{NC}, B_r - V_{NC}	1.2	1.5	1.8	Volts
Input Off Voltage	$V_{CIN(off)}$	Applied between V_{UP1} - V_{UPC}, V_{VP1} - V_{VPC}, V_{WP1} - V_{WPC}, V_{N1} - V_{NC}, B_r - V_{NC}	1.7	2.0	2.3	Volts
PWM Input Frequency	f_{PWM}	3-Ø Sinusoidal	–	15	20	kHz
Dead Time	t_{DEAD}	For each Input Pulse	3.0	–	–	µS
		Using example Interface Circuit*	5.0	–	–	µS
Fault Output Current	$I_{FO(H)}$	V_D = 15V, V_{FO} = 15V	–	–	0.01	mA
	$I_{FO(L)}$	V_D = 15V, V_{FO} = 15V	–	10	15	mA
Minimum Fault Output Pulse Width	t_{FO}	V_D = 15V	1.0	2.0	–	mS
		Using example Interface Circuit* V_D = 15V	1.0	2.0	–	mS
Brake Sector						
Collector Emitter Saturation Voltage	$V_{CE(sat)}$	V_D = 15V, V_{CIN} = 0V, I_C = 30A, T_j = 25°C, Fig. 2	–	2.7	3.5	Volts
		V_D = 15V, V_{CIN} = 0V, I_C = 30A, T_j = 125°C, Fig. 2	–	3.1	4.0	Volts
Diode Forward Voltage	V_{FM}	I_C = 30A, V_D = 15V, V_{CIN} = 15V, Fig. 3	–	1.7	2.7	Volts
Collector Cutoff Current	I_{CEX}	V_{CE} = V_{CES}, T_j = 25°C, Fig. 6	–	–	1	mA
		V_{CE} = V_{CES}, T_j = 125°C, Fig. 6	–	–	10	mA

*See Intellimod-3 Applications Data Section 4.3.

This Material Copyrighted By Its Respective Manufacturer
http://store.iiic.cc/

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

T-57-29

PM75RHA060
Intellimod-3 Modules
Three Phase + Brake IGBT Inverter Output
75 Amperes/110-230 Volt Line

Electrical Characteristics, T_j = 25 °C unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
IGBT Inverter Sector						
Collector Cutoff Current	I_{CEX}	$V_{CE} = V_{CES}$, T_j = 25°C, Fig. 6	–	–	1	mA
Collector Cutoff Current	I_{CEX}	$V_{CE} = V_{CES}$, T_j = 125°C, Fig. 6	–	–	10	mA
Diode Forward Voltage	V_{FM}	$-I_C$ = 75A, V_D = 15V, V_{CIN} = 15V, Fig. 3	–	1.6	2.5	Volts
Collector Emitter Saturation Voltage	$V_{CE(sat)}$	V_D = 15V, V_{CIN} = 0V, T_j = 25°C, I_C = 75A, Fig. 2	–	2.7	3.5	Volts
Collector Emitter Saturation Voltage	$V_{CE(sat)}$	V_D = 15V, V_{CIN} = 0V, T_j = 125°C, I_C = 75A, Fig. 2	–	2.5	3.4	Volts
Inductive Load Switching Times	t_{on}	V_D = 15V, V_{CIN} = 0V, V_{CC} = 300V, I_C = 75A, T_j = 125 °C, Fig. 4, 5	0.3	0.5	1.5	µS
	t_{rr}		–	0.25	0.4	µS
	$t_{C(on)}$		–	0.4	1.2	µS
	t_{off}		–	2.0	3.3	µS
	$t_{C(off)}$		–	0.6	1.2	µS

Thermal Characteristics

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistances Junction to Case	$R_{th(j-c)Q}$	Inverter IGBT	–	–	0.4	°C/W
	$R_{th(j-c)F}$	Inverter FWD	–	–	1.0	°C/W
	$R_{th(j-c)Q}$	Brake IGBT	–	–	0.6	°C/W
	$R_{th(j-c)F}$	Brake FWD	–	–	1.5	°C/W
Contact Thermal Resistance	$R_{th(c-f)}$	Case to Fin, Thermal Grease Applied	–	–	0.19	°C/W

Recommended Operating Conditions

Characteristics	Symbol	Test Conditions	Value	Units
Supply Voltage	V_{CC}	Applied across P - N Terminals	0 ~ 400	Volts
	V_D	Applied between V_{UP1} - V_{UPC}, V_{N1} - V_{NC}, V_{VP1} - V_{VPC}, V_{WP1} - V_{WPC}	15±1.5	Volts
Input On Voltage	$V_{CIN(on)}$	Applied between U_P, V_P, W_P, U_N, V_N, W_N, B_r	0 ~ 0.8	Volts
Input Off Voltage	$V_{CIN(off)}$		4 ~ 15	Volts
PWM Input Frequency	f_{PWM}	Using example Interface Circuit *	5 ~ 20	kHz
Minimum Dead Time	t_{DEAD}	Using example Interface Circuit *	5.0	µS

*See Intellimod-3 Applications Data Section 4.3.


This Material Copyrighted By Its Respective Manufacturer
http://store.iiic.cc/

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14


T-57-29

PM75RHA060
Intellimod-3 Modules
Three Phase + Brake IGBT Inverter Output
75 Amperes/110-230 Volt Line
Inverter Part


SATURATION VOLTAGE CHARACTERISTICS (TYPICAL)

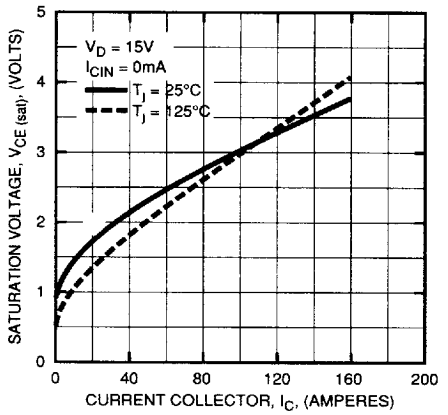


COLLECTOR-EMITTER SATURATION VOLTAGE (TYPICAL)

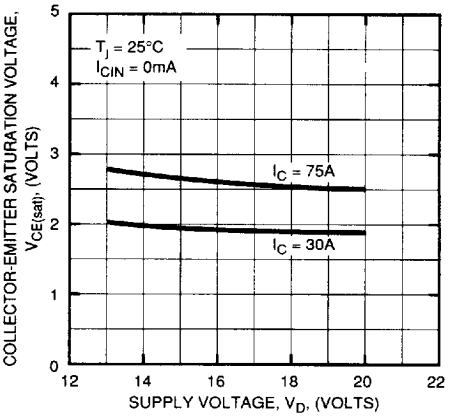


OUTPUT CHARACTERISTICS (TYPICAL)

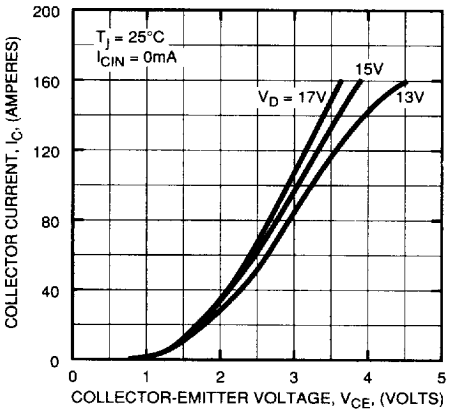


SWITCHING TIME VS. COLLECTOR CURRENT (TYPICAL)

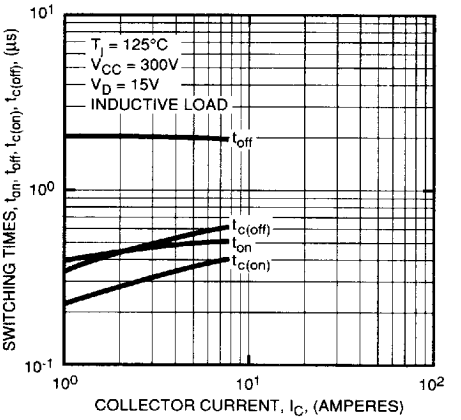

REVERSE RECOVERY CHARACTERISTICS OF FREE-WHEEL DIODE (TYPICAL)

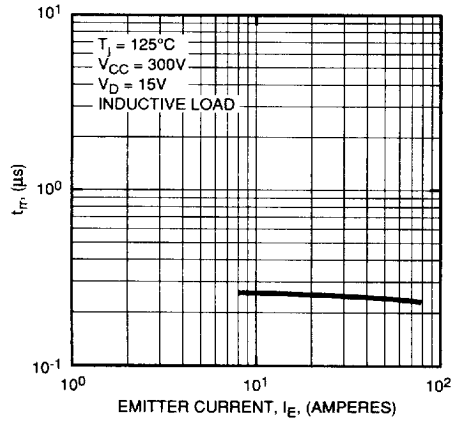

REVERSE COLLECTOR CURRENT VS. EMITTER-COLLECTOR VOLTAGE (DIODE FORWARD CHARACTERISTICS) (TYPICAL)

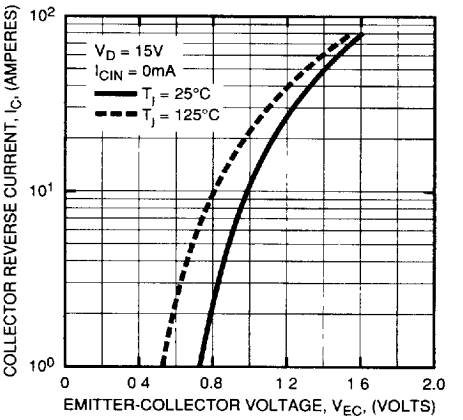


This Material Copyrighted By Its Respective Manufacturer
http://store.iiic.cc/


Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

PM75RHA060
IntelliImod-3 Modules
Three Phase + Brake IGBT Inverter Output
75 Amperes/110-230 Volt Line
Inverter Part


POWER DISSIPATION DERATING CURVE (PER IGBT ELEMENT)

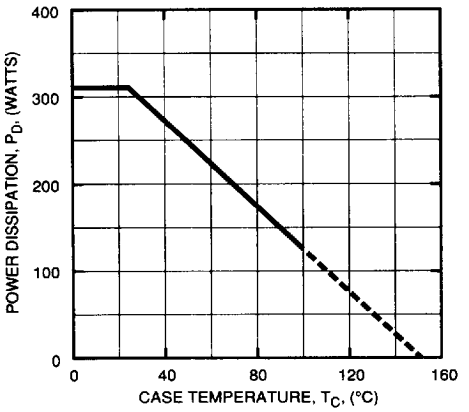


POWER DISSIPATION DERATING CURVE (PER FWDI ELEMENT)

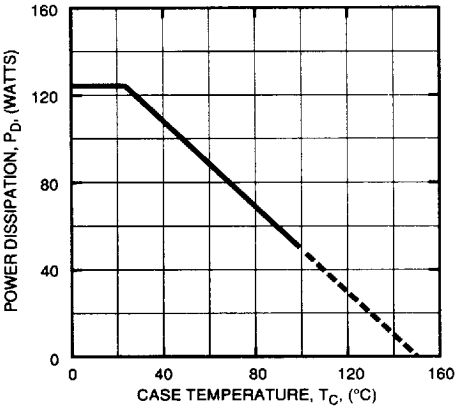

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (IGBT)

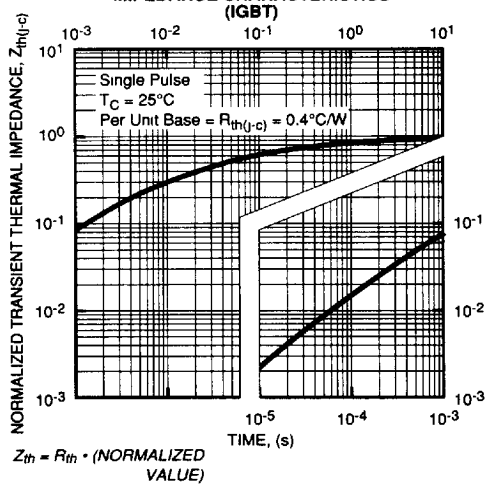

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (FWDI)

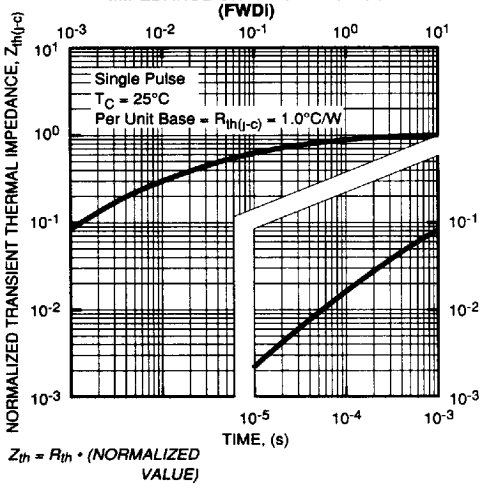


This Material Copyrighted By Its Respective Manufacturer
http://store.iiic.cc/

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14


T-57-29

PM75RHA060
Intellimod-3 Modules
Three Phase + Brake IGBT Inverter Output
75 Amperes/110-230 Volt Line
Brake Part


SATURATION VOLTAGE CHARACTERISTICS (TYPICAL)

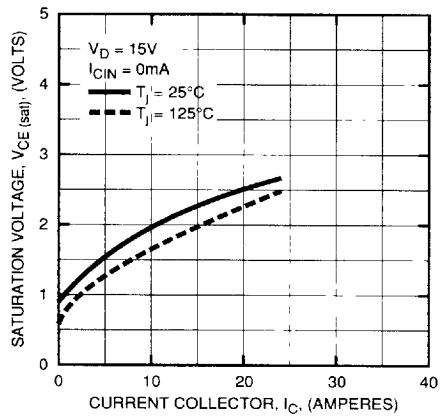


COLLECTOR-EMITTER SATURATION VOLTAGE (TYPICAL)

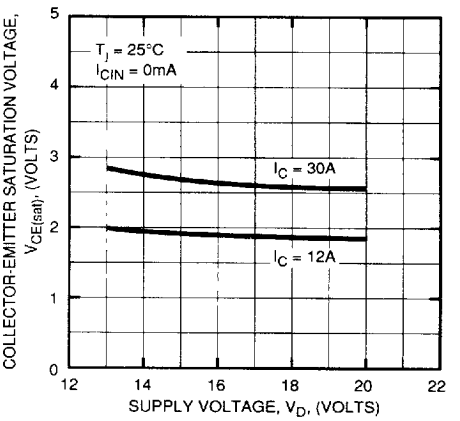

OUTPUT CHARACTERISTICS (TYPICAL)

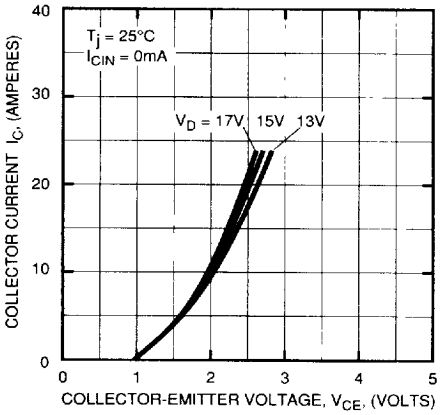

REVERSE COLLECTOR CURRENT VS. EMITTER-COLLECTOR VOLTAGE (DIODE FORWARD CHARACTERISTICS) (TYPICAL)

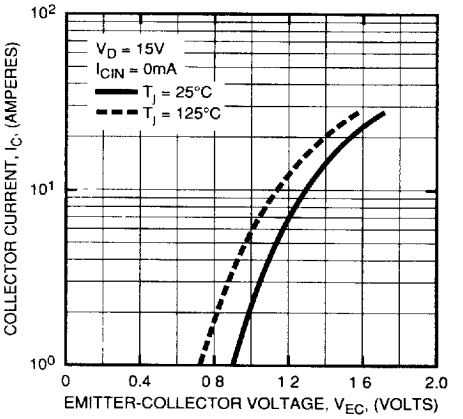


This Material Copyrighted By Its Respective Manufacturer
http://store.iiic.cc/


Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

PM75RHA060
Intellimod-3 Modules
Three Phase + Brake IGBT Inverter Output
75 Amperes/110-230 Volt Line
Brake Part


POWER DISSIPATION DERATING CURVE (PER IGBT ELEMENT)

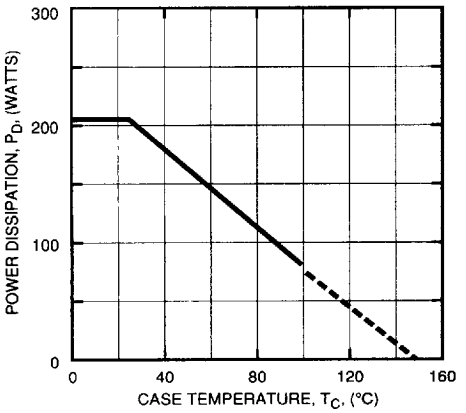


POWER DISSIPATION DERATING CURVE (PER FWDi ELEMENT)

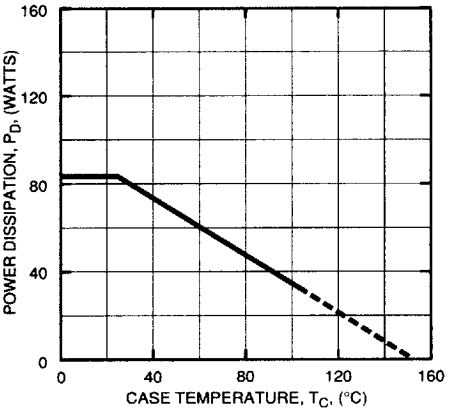

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (IGBT)

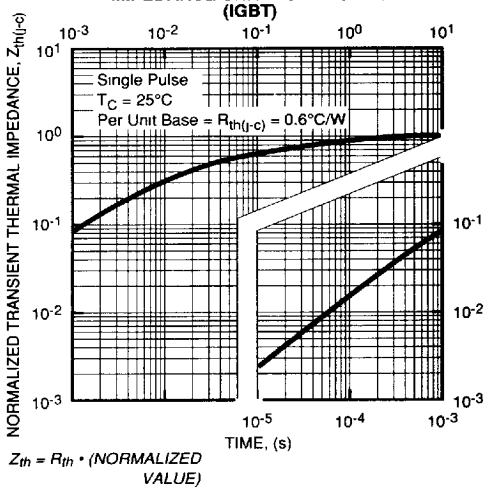

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (FWDi)

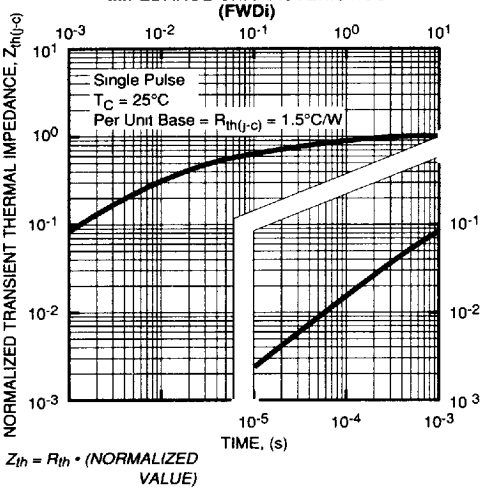

This Material Copyrighted By Its Respective Manufacturer
http://store.iiic.cc/

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

PM75RHA060
Intellimod-3 Modules
Three Phase + Brake IGBT Inverter Output
75 Amperes/110-230 Volt Line

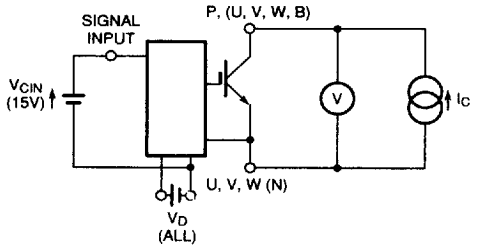


Figure 1 V_{CES} Test

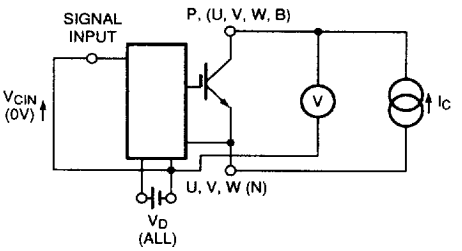


Figure 2 $V_{CE(SAT)}$ Test

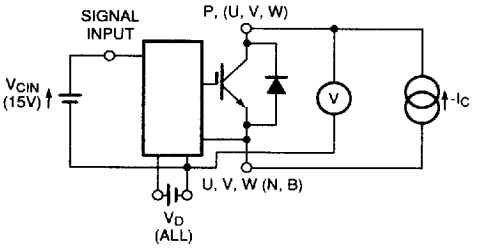


Figure 3 V_{EC} Test

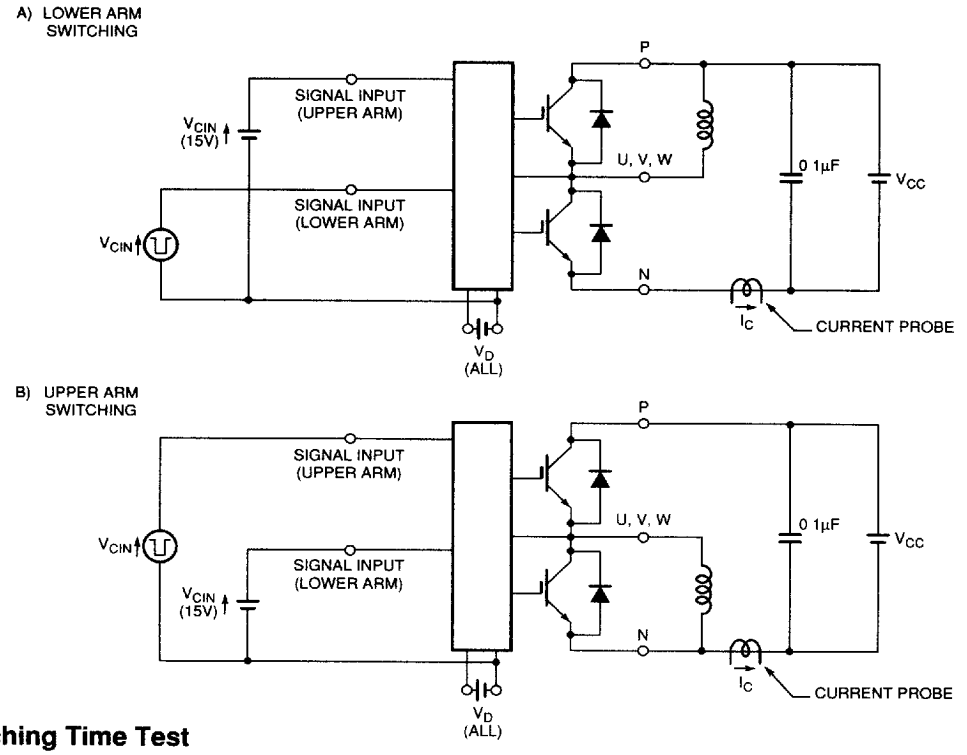


Figure 4 Switching Time Test

This Material Copyrighted By Its Respective Manufacturer
http://store.iiic.cc/

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

T-57-29

PM75RHA060
Intellimod-3 Modules
Three Phase + BrakeIGBT Inverter Output
75 Amperes/110-230 Volt Line

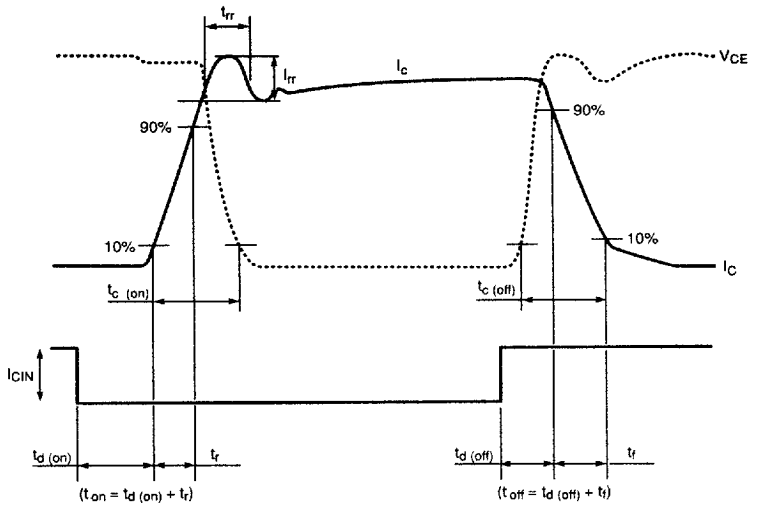


Figure 5 Switching Test Waveform

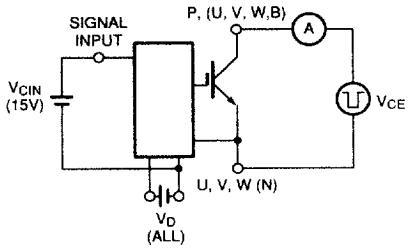


Figure 6 I_{CES} Test

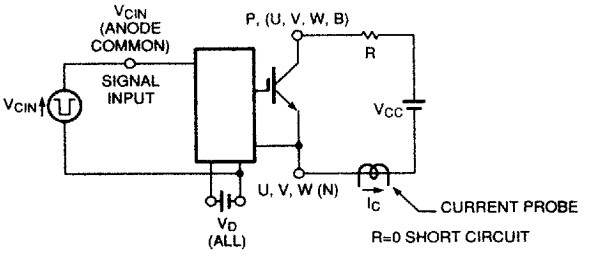


Figure 7 Over Current and Short Circuit Test

This Material Copyrighted By Its Respective Manufacturer
http://store.iiic.cc/

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP