ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Aerotech NDrive CP10* at our website: ***Click HERE***

Ndrive Series

Digital Servo Amplifiers – PWM

- Wide output power range from 10 A peak to 150 A peak at 320 VDC
- 2- or 3-phase AC line input or DC input
- CE approved and UL listed
- PWM power stages
- Digital current, velocity, and position loops for improved motion stability
- Optional integrated encoder multiplier for higher throughput and reduced wiring
- Flexible design provides ability to drive brushless and DC brush-type servomotors as well as stepping motors
- Encoder or resolver feedback



Ndrive HPe



Ndrive CP



Ndrive MP

The Ndrive® family of digital servo amplifiers are high performance discrete drives used with the Automation 3200 motion controller. These drives are capable of controlling brushless, DC brush, and stepper motors over a wide range of operating voltages and currents. Based on a common architecture, Ndrive amplifiers perform both current- and position-loop closures digitally.

The use of high-performance double-precision processors allows these drives to generate ultra-smooth motion profiles. Servo system response is optimized with the use of up to eight second-order loop-shaping filters, precise time-aligned feed-forward and other proprietary techniques with loop closure rates up to 20 kHz.

The Ndrive family is offered in a number of highly efficient PWM versions. The Ndrive MP is a low power, small footprint PWM drive ideal for space-sensitive applications. The Ndrive CP is a medium-power PWM drive capable of running directly from AC mains voltage and is optimized for cost-sensitive applications. The Ndrive HPe is the highest performance PWM drive providing a host of features not available on the other PWM drives, and is available in output current ranges from 10 A to 150 A peak.

Options for the Ndrive family include integral encoder interpolation, one- to three-axis position synchronized output (PSO), automatic brake control, digital and analog I/O expansion, absolute encoder interface, and one- or two-channel resolver interfaces. An optional dedicated ethernet port is available on the HPe drives for connection to third-party I/O expansion devices. This provides the potential to connect to a large number of I/O points typically required for PLC-type applications.

Any combination of Ndrive amplifiers may be connected to the Automation 3200 FireWire® network, allowing the system to be customized as needed.

WORLD HEADQUARTERS: Aerotech, Inc., United States • Phone: +1-412-963-7470 • Email: sales@aerotech.com
Aerotech, Ltd., United Kingdom • Phone: +44-118-9409400 • Email: sales@aerotech.co.uk
Aerotech GmbH, Germany • Phone: +49-911-9679370 • Email: sales@aerotechgmbh.de
Aerotech KK, Japan • Phone: +81-47-489-1741 • Email: sales@aerotechkk.co.jp
Aerotech China • Phone: +86-21-5508-6360 • Email: sales@aerotech.com.cn

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Ndrive Series COMPARISON



Ndrive HPe
Width: 99 mm
Height: 232.4 mm



Ndrive CP
Width: 63.5 mm
Height: 198.2 mm



Ndrive MP
Width: 41.1 mm
Height: 141.2 mm

Ndrive Comparison Chart	Ndrive HPe	Ndrive CP	Ndrive MP
PC Interface	FireWire®	FireWire®	FireWire®
Current Output, Peak(1)	10-150 A	10-30 A	10 A
Current Output, Continuous(1)	5-75 A	5-10 A	5 A
Bus Voltage	±10-320 VDC	±10-320 VDC	±40 VDC
Amplifier Type	PWM	PWM	PWM
Motor Supply Voltage	2 or 3 Phase AC	2 Phase AC	DC
Standard I/O(2)	4-DO/6-DI 1-AO/1-AI	4-DO/6-DI 1-AO/1-AI	1-AI
Expansion I/O(2) (Additional to Base I/O)	16-DO/16-DI 3-AO/3-AI	16-DO/16-DI 1-AO/1-AI	8-DO/8-DI 1-AO/1-AI
Single Axis PSO(3)	Yes	Yes	Yes
Dual Axis PSO(3)	Yes	No	No
Triple Axis PSO(3)	Yes	No	No
Ethernet Capable for Third-Party I/O	Yes	No	No

Notes:
1. Peak value of the sine wave; rms current for AC motors is 0.707 * A_{pk}.
2. DO = Digital Output; DI = Digital Input; AO = Analog Output; AI = Analog Input.
3. PSO not available on Ndrive CP/MP when using integral MXU.

WORLD HEADQUARTERS: Aerotech, Inc., United States • Phone: +1-412-963-7470 • Email: sales@aerotech.com
Aerotech, Ltd., United Kingdom • Phone: +44-118-9409400 • Email: sales@aerotech.co.uk
Aerotech GmbH, Germany • Phone: +49-911-9679370 • Email: sales@aerotechgmbh.de
Aerotech KK, Japan • Phone: +81-47-489-1741 • Email: sales@aerotechkk.co.jp
Aerotech China • Phone: +86-21-3319 7980 • Email: sales@aerotech.com.cn

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Ndrive HPe Series SPECIFICATIONS

Ndrive HPe	Units	10	20	30	50	75	100	150
Motor Style		Brush, Brushless, Stepper[1]						
Motor Supply	VAC	Single-Phase 7-240 V; 50/60 Hz			Single- or Three-Phase 115 or 230 V; 50/60 Hz			
Control Supply[2]	VAC	85-240 VAC; 50/60 Hz						
Bus Voltage[3]	VDC	10-320[3]						
Peak Output Current (1 sec)[4]	A_{pk}	10	20	30	50	75	100	150
Continuous Output Current[4]	A_{pk}	5	10	10	25	37	50	75
Digital Inputs	—	6 Optically-Isolated (2 High Speed)						
Digital Outputs	—	4 Optically-Isolated						
Analog Inputs	—	One 16-bit Differential; ±10 V						
Analog Outputs	—	One 16-bit Single-Ended; ±10 V						
Dedicated Axis I/O on Feedback Connector		Three Limit Inputs (CW, CCW, Home); Three Hall Effect Inputs (A, B, C); Three High-Speed differential Inputs (sin, cos, mkr for encoder); Motor Over-Temperature Input						
Dedicated I/O on Auxiliary Feedback Connector		sin, cos, mkr for Aux Enc; Aux Enc can be used for PSO Output						
I/O Expansion Board[5]	—	16/16 Digital Opto-Isolated; 3 Analog In (±10 V, 16-bit Differential); 3 Analog Out (±10 V, 16-bit)						
High Speed Data Capture		Yes (50 ns Latency)						
Automatic Brake Control	—	Standard; 24 V at 1 A						
Emergency Stop Sense Input (ESTOP)[6]	—	Standard; 24 V Opto-Isolated						
Position Synchronized Output (PSO)	—	Single Axis Standard, Two/Three Axis Optional						
Can Output Multiplied Encoder		Yes						
Can Output Square Wave Encoder		Yes						
Primary Encoder Input Frequency		500 kHz Amplified Sine Wave Standard (for onboard multiplier); 40 MHz TTL Square Wave						
Secondary Encoder Input Frequency		32 MHz Square Wave						
Encoder Multiplication	—	Up to x65536 with Quadrature Output (MXH)						
Resolver Interface	—	Optional; 1 or 2 Channel; 16-bit						
Internal Shunt Resistor		40 W Continuous; 400 W Peak (5 seconds)			440 W Continuous			
External Shunt		Optional						
Ethernet	—	Optional						
USB		No						
RS-232		No						
FireWire		Yes						
Fieldbus		Modbus TCP on PC						
Current Loop Update Rate	kHz	20						
Servo Loop Update Rate	kHz	8						
Power Amplifier Bandwidth	kHz	Selectable Through Software						
Minimum Load Inductance	mH	0.1 @ 160 VDC (1.0 mH @ 320 VDC)						
Operating Temperature	°C	0 to 50						
Storage Temperature	°C	-30 to 85						
Weight	kg (lb)	2.36 (5.2)			6.64 (14.6)			11.06 (24.4)

Notes:
1. For stepper motors only, one-half of bus voltage is applied across the motor (e.g., 80 VDC supply results in 40 VDC across stepper motor).
2. "Keep Alive" supply.
3. Output voltage dependent upon input voltage.
4. Peak value of the sine wave; rms current for AC motors is 0.707 * A_{pk}.
5. Requires IO option.
6. Requires external relay to remove motor supply power.

WORLD HEADQUARTERS: Aerotech, Inc., United States • Phone: +1-412-963-7470 • Email: sales@aerotech.com
Aerotech, Ltd., United Kingdom • Phone: +44-118-9409400 • Email: sales@aerotech.co.uk
Aerotech GmbH, Germany • Phone: +49-911-96793 70 • Email: sales@aerotechgmbh.de
Aerotech KK, Japan • Phone: +81-47-489-1741 • Email: sales@aerotechkk.co.jp
Aerotech China • Phone: +86-21-37028630 • Email: sales@aerotech.com.cn

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Ndrive CP Series SPECIFICATIONS

Ndrive CP	Units	10	20	30
Motor Style		Brush, Brushless, Stepper(1)		
Motor Supply	VAC	Single-Phase 7-240 VAC; 50/60 Hz		
Control Supply(2)	VAC	85-240 VAC; 50/60 Hz		
Bus Voltage(3)	VDC	10-320(3)		
Peak Output Current (1 sec)(4)	A_{pk}	10	20	30
Continuous Output Current(4)	A_{pk}	5	10	10
Digital Inputs	—	6 Optically-Isolated (2 High Speed)		
Digital Outputs	—	4 Optically-Isolated		
Analog Inputs	—	One 16-bit Differential; ±10 V		
Analog Outputs	—	One 16-bit Single-Ended; ±10 V		
Dedicated Axis I/O on Feedback Connector		Three Limit Inputs (CW, CCW, Home); Three Hall Effect Inputs (A, B, C); Three High-Speed differential Inputs (sin, cos, mkr for encoder); Motor Over-Temperature Input		
Dedicated I/O on Auxiliary Feedback Connector		sin, cos, mkr for Aux Enc; Aux Enc can be used for PSO Output		
I/O Expansion Board(5)	—	16/16 Digital Opto-Isolated; 1 Analog In (±10 V, 12-bit Differential); 1 Analog Out (±10 V, 16-bit)		
High Speed Data Capture		Yes (50 ns Latency)		
Automatic Brake Control	—	Standard; 24 V at 1 A		
Emergency Stop Sense Input (ESTOP)(6)	—	Standard; 24 V Opto-Isolated		
Position Synchronized Output (PSO)	—	Single Axis Only		
Can Output Multiplied Encoder		No		
Can Output Square Wave Encoder		Yes		
Primary Encoder Input Frequency		200 kHz Amplified Sine Wave Standard (for onboard multiplier); 40 MHz TTL Square Wave		
Secondary Encoder Input Frequency		40 MHz Square Wave		
Encoder Multiplication	—	Up to x4096 (MXU)		
Resolver Interface	—	N/A		
Internal Shunt Resistor		40 W Continuous; 400 W Peak (5 seconds)		
External Shunt		Optional		
Ethernet	—	N/A		
USB		No		
RS-232		No		
FireWire		Yes		
Fieldbus		Modbus on PC		
Current Loop Update Rate	kHz	20		
Servo Loop Update Rate	kHz	8		
Power Amplifier Bandwidth	kHz	Selectable Through Software		
Minimum Load Inductance	mH	0.1 @ 160 VDC (1.0 mH @ 320 VDC)		
Operating Temperature	°C	0 to 50		
Storage Temperature	°C	-30 to 85		
Weight	kg (lb)	1.64 (3.6)		

Notes:
1. For stepper motors only, one-half of bus voltage is applied across the motor (e.g., 80 VDC supply results in 40 VDC across stepper motor).
2. "Keep Alive" supply.
3. Output voltage dependent upon input voltage.
4. Peak value of the sine wave; rms current for AC motors is 0.707 * A_{pk}.
5. Requires IO option.
6. Requires external relay to remove motor supply power.

WORLD HEADQUARTERS: Aerotech, Inc., United States • Phone: +1-412-963-7470 • Email: sales@aerotech.com
Aerotech, Ltd., United Kingdom • Phone: +44-118-9409400 • Email: sales@aerotech.co.uk
Aerotech GmbH, Germany • Phone: +49-911-9679370 • Email: sales@aerotechgmbh.de
Aerotech KK, Japan • Phone: +81-47-489-1741 • Email: sales@aerotechkk.co.jp
Aerotech China • Phone: +86-21-3788-7996 • Email: sales@aerotech.com.cn

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Ndrive MP Series SPECIFICATIONS

Ndrive MP	Units	
Motor Style		Brush, Brushless, Stepper[1]
Motor Supply	VDC	10-80
Control Supply[2]	VDC	24-80
Bus Voltage[3]	VDC	10-80
Peak Output Current (1 sec)[4]	A_{pk}	10
Continuous Output Current[4]	A_{pk}	5
Digital Inputs	—	N/A
Digital Outputs	—	N/A
Analog Inputs	—	One 16-bit Differential; ±10 V
Analog Outputs	—	N/A
Dedicated Axis I/O on Feedback Connector		Three Limit Inputs (CW, CCW, Home); Three Hall Effect Inputs (A, B, C); Three High-Speed differential Inputs (sin, cos, mkr for encoder); Motor Over-Temperature Input
Dedicated I/O on Auxiliary Feedback Connector		N/A
I/O Expansion Board[5]	—	8/8 Digital Opto-Isolated; 1 Analog In (±10 V, 12-bit Differential); 1 Analog Out (±5 V, 16-bit); sin, cos, mrk for Aux Enc; Aux Enc can be used for PSO Output
High Speed Data Capture		Yes (50 ns Latency)
Automatic Brake Control	—	Optional[6]
Emergency Stop Sense Input (ESTOP)[6]	—	Standard; 24 V Opto-Isolated
Position Synchronized Output (PSO)	—	Optional[5]
Can Output Multiplied Encoder		No
Can Output Square Wave Encoder		No
Primary Encoder Input Frequency		200 kHz Amplified Sine Wave Standard (for onboard multiplier); 40 MHz TTL Square Wave
Secondary Encoder Input Frequency		32 MHz Square Wave
Encoder Multiplication	—	Up to x1024 (MXU)
Resolver Interface	—	N/A
Internal Shunt Resistor		N/A
External Shunt		N/A
Ethernet	—	N/A
USB		No
RS-232		No
FireWire		Yes
Fieldbus		Modbus TCP on PC
Current Loop Update Rate	kHz	20
Servo Loop Update Rate	kHz	8
Power Amplifier Bandwidth	kHz	Selectable Through Software
Minimum Load Inductance	mH	0.1 @ 80 VDC
Operating Temperature	°C	0 to 50
Storage Temperature	°C	-30 to 85
Weight	kg (lb)	0.45 (1.0)


Notes:
1. For stepper motors only, one-half of bus voltage is applied across the motor (e.g., 80 VDC supply results in 40 VDC across stepper motor).
2. "Keep Alive" supply.
3. Output voltage dependent upon input voltage.
4. Peak value of the sine wave; rms current for AC motors is 0.707 * A_{pk}.
5. Requires IO option.
6. Requires external relay to remove motor supply power.

WORLD HEADQUARTERS: Aerotech, Inc., United States • Phone: +1-412-963-7470 • Email: sales@aerotech.com
Aerotech, Ltd., United Kingdom • Phone: +44-118-9409400 • Email: sales@aerotech.co.uk
Aerotech GmbH, Germany • Phone: +49-911-9679370 • Email: sales@aerotechgmbh.de
Aerotech KK, Japan • Phone: +81-47-489-1741 • Email: sales@aerotechkk.co.jp
Aerotech China • Phone: +86-21-5508-6360 • Email: sales@aerotech.com.cn

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Ndrive HPe10/20/30 DIMENSIONS

Ndrive HPe10/20/30

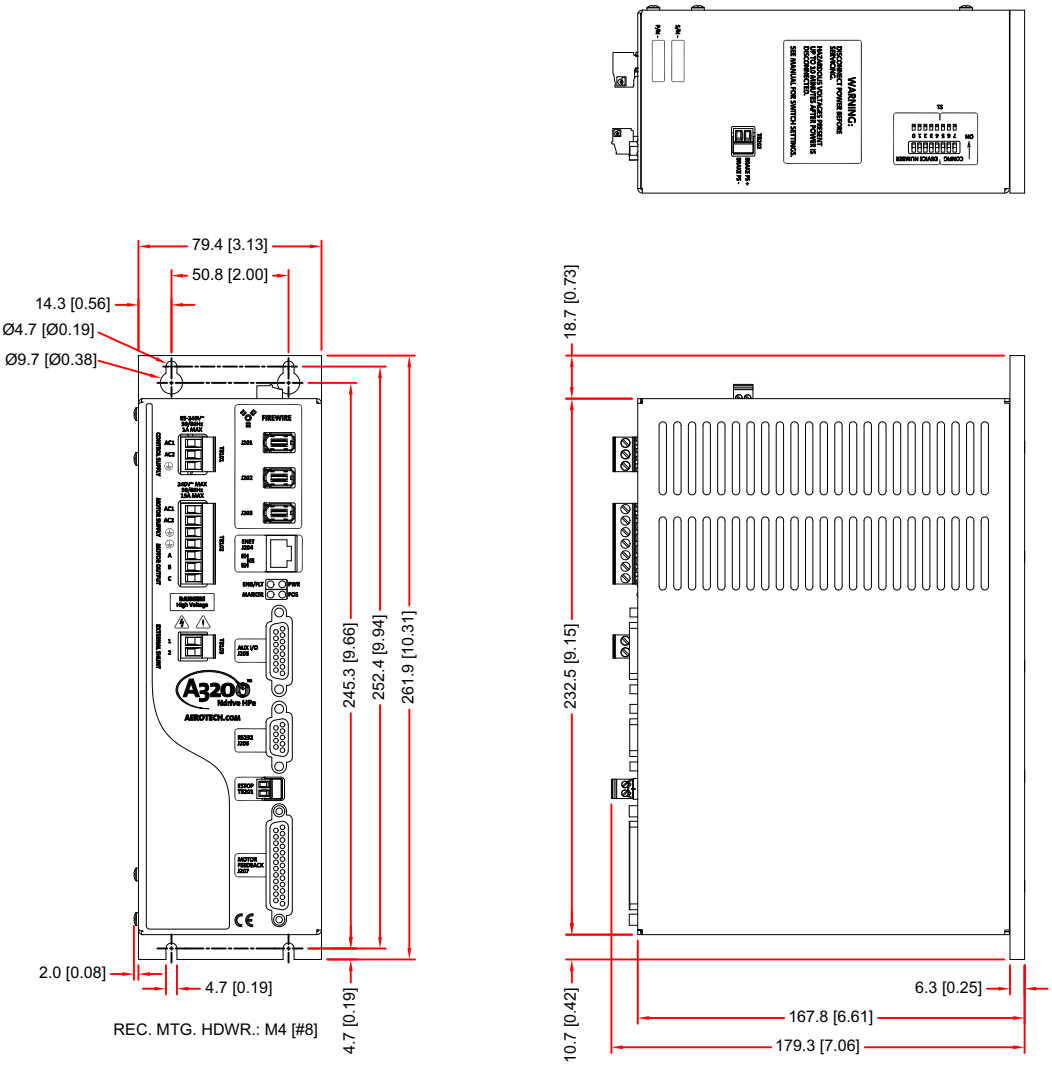


WORLD HEADQUARTERS: Aerotech, Inc., United States • Phone: +1-412-963-7470 • Email: sales@aerotech.com
Aerotech, Ltd., United Kingdom • Phone: +44-118-9409400 • Email: sales@aerotech.co.uk
Aerotech GmbH, Germany • Phone: +49-911-9679370 • Email: sales@aerotechgmbh.de
Aerotech KK, Japan • Phone: +81-47-489-1741 • Email: sales@aerotechkk.co.jp
Aerotech China • Phone: +86-21-3788-9000 • Email: sales@aerotech.com.cn

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Ndrive HPe10/20/30 DIMENSIONS

Ndrive HPe10/20/30 with Optional I/O

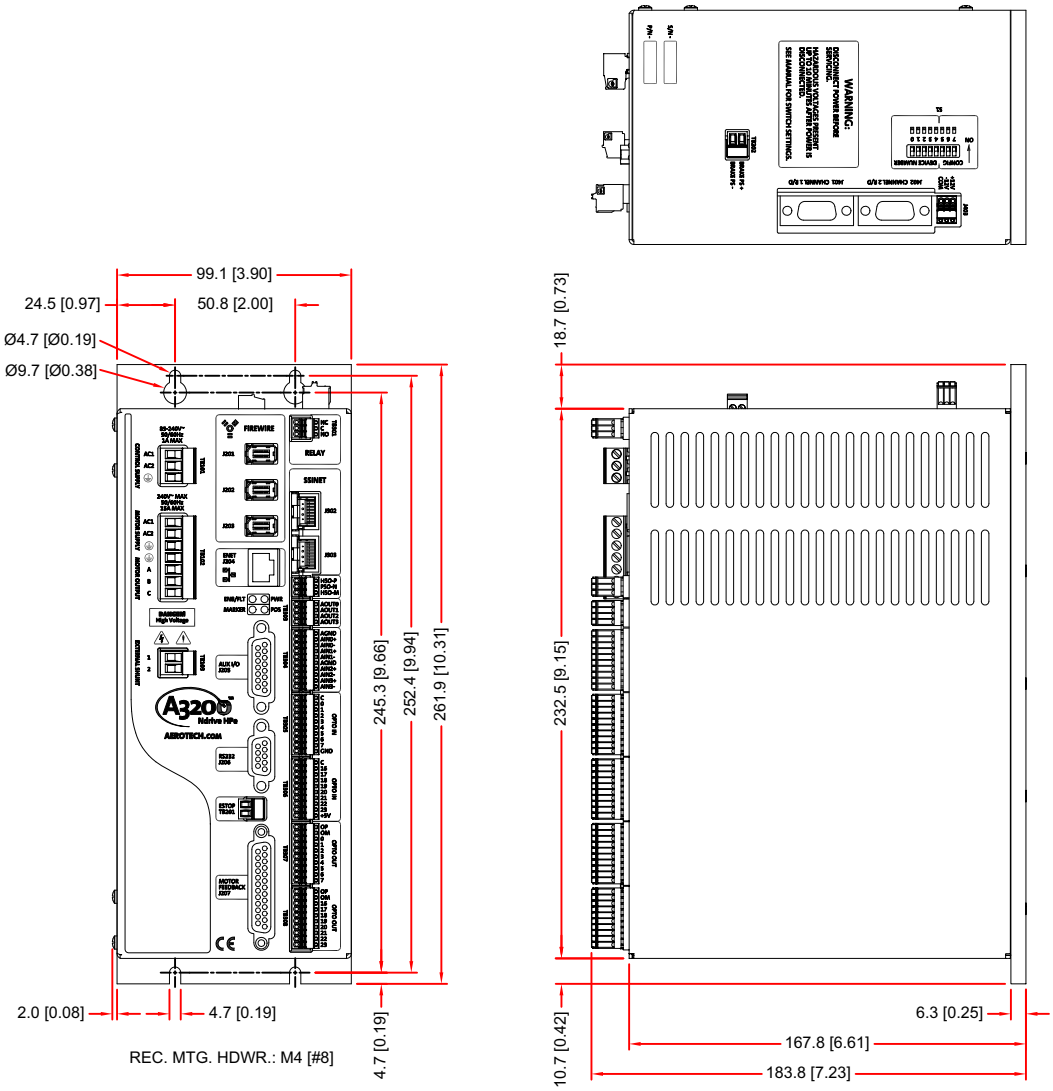


WORLD HEADQUARTERS: Aerotech, Inc., United States • Phone: +1-412-963-7470 • Email: sales@aerotech.com
Aerotech, Ltd., United Kingdom • Phone: +44-118-9409400 • Email: sales@aerotech.co.uk
Aerotech GmbH, Germany • Phone: +49-911-9679370 • Email: sales@aerotechgmbh.de
Aerotech KK, Japan • Phone: +81-47-489-1741 • Email: sales@aerotechkk.co.jp
Aerotech China • Phone: +86-21-5508-6015 • Email: sales@aerotech.com.cn

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Ndrive HPe50/75/100 DIMENSIONS

Ndrive HPe50/75/100 with Optional I/O

(Dimensions without optional I/O are identical)

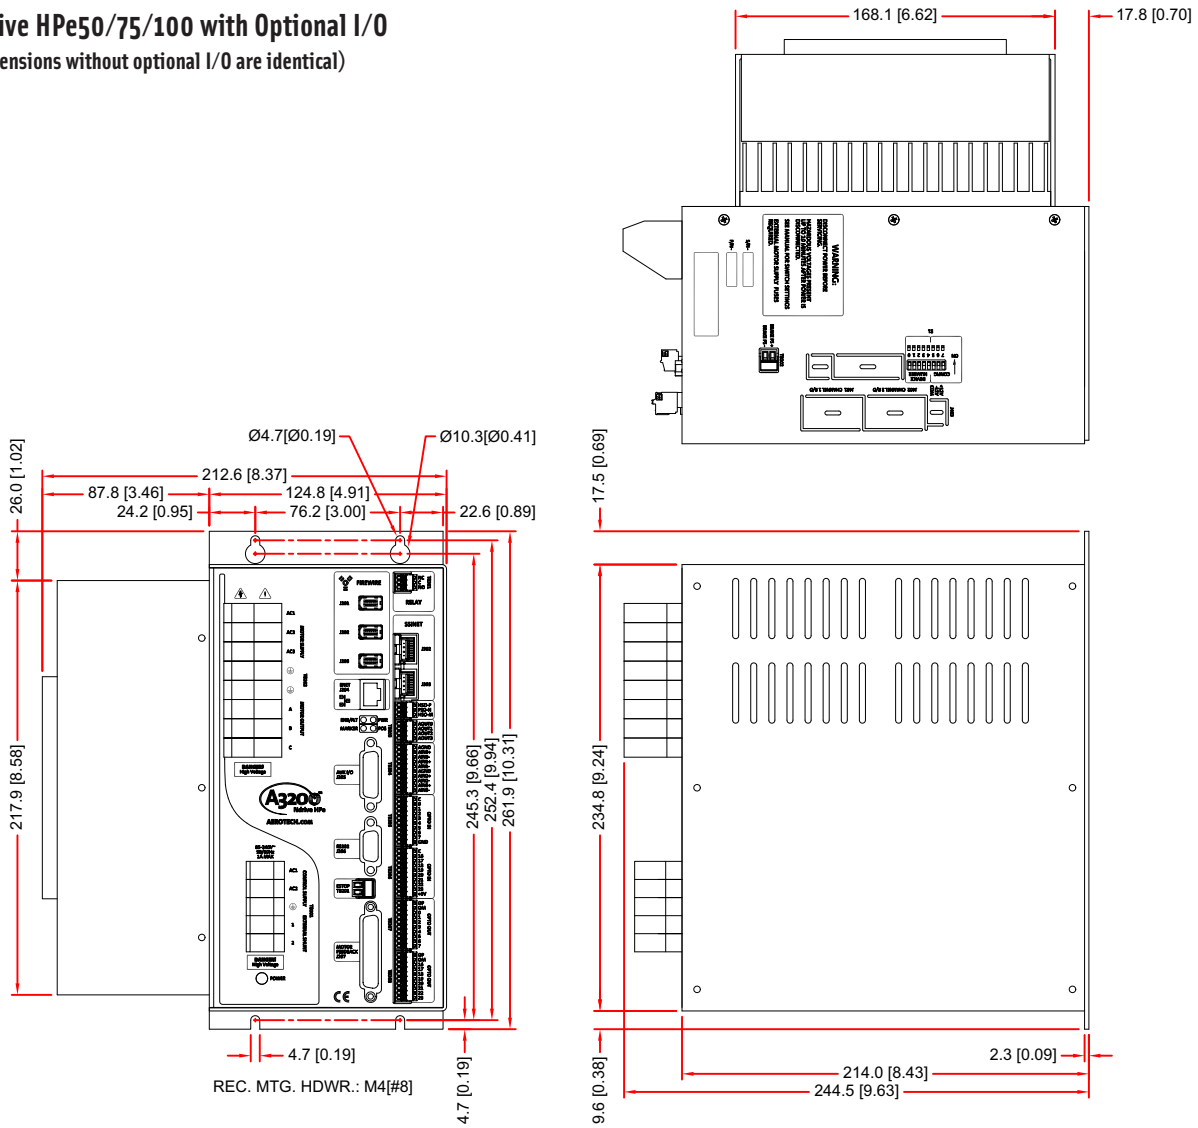


WORLD HEADQUARTERS: Aerotech, Inc., United States • Phone: +1-412-963-7470 • Email: sales@aerotech.com
Aerotech, Ltd., United Kingdom • Phone: +44-118-9409400 • Email: sales@aerotech.co.uk
Aerotech GmbH, Germany • Phone: +49-911-9679370 • Email: sales@aerotechgmbh.de
Aerotech KK, Japan • Phone: +81-47-489-1741 • Email: sales@aerotechkk.co.jp
Aerotech China • Phone: +86-21-3788-9000 • Email: sales@aerotech.com.cn

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Ndrive HPe150 DIMENSIONS

Ndrive HPe150 with Optional I/O

(Dimensions without optional I/O are identical)

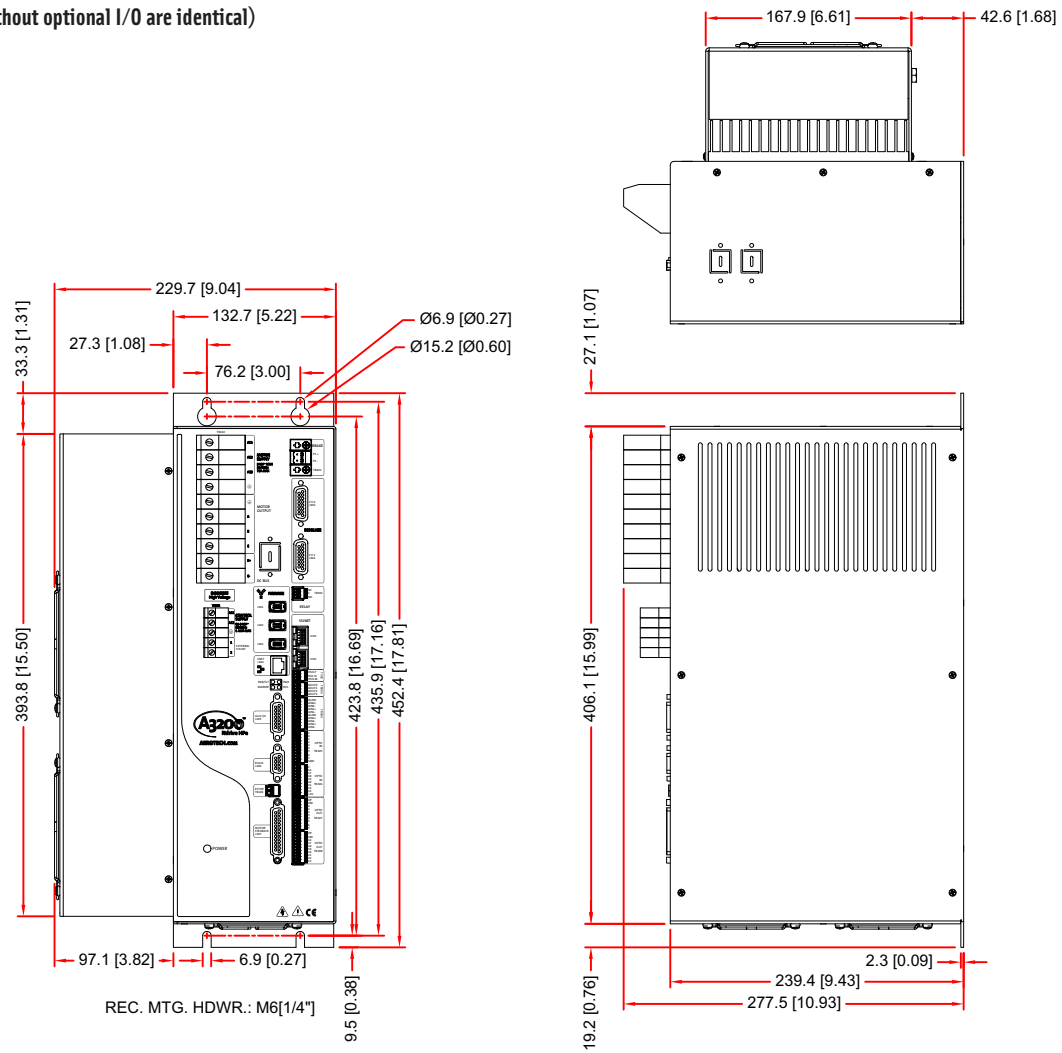


WORLD HEADQUARTERS: Aerotech, Inc., United States • Phone: +1-412-963-7470 • Email: sales@aerotech.com
Aerotech, Ltd., United Kingdom • Phone: +44-118-9409400 • Email: sales@aerotech.co.uk
Aerotech GmbH, Germany • Phone: +49-911-9679370 • Email: sales@aerotechgmbh.de
Aerotech KK, Japan • Phone: +81-47-489-1741 • Email: sales@aerotechkk.co.jp
Aerotech China • Phone: +86-21-5508-6630 • Email: sales@aerotech.com.cn

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Ndrive CP DIMENSIONS

Ndrive CP with Optional I/O

(Dimensions without optional I/O are identical)

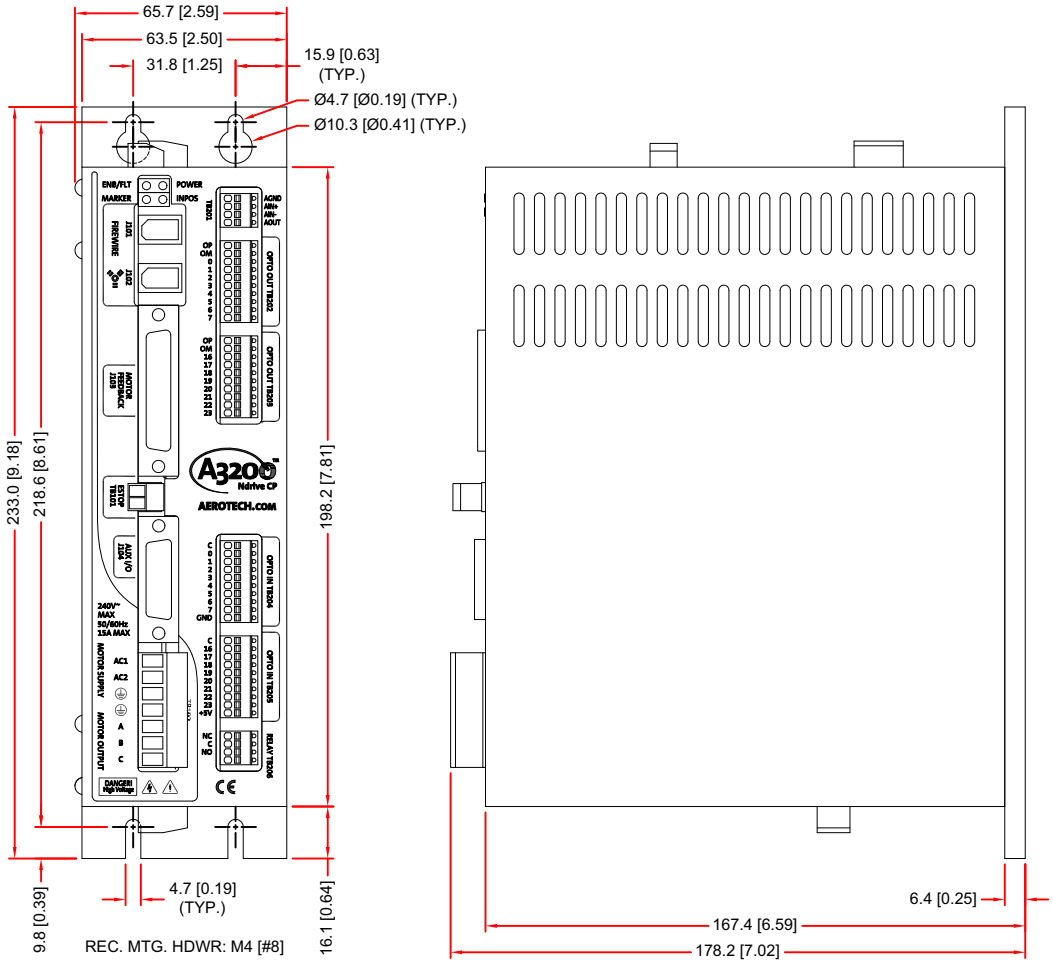


WORLD HEADQUARTERS: Aerotech, Inc., United States • Phone: +1-412-963-7470 • Email: sales@aerotech.com
Aerotech, Ltd., United Kingdom • Phone: +44-118-9409400 • Email: sales@aerotech.co.uk
Aerotech GmbH, Germany • Phone: +49-911-9679370 • Email: sales@aerotechgmbh.de
Aerotech KK, Japan • Phone: +81-47-489-1741 • Email: sales@aerotechkk.co.jp
Aerotech China • Phone: +86-21-3788-9000 • Email: sales@aerotech.com.cn

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Ndrive MP DIMENSIONS

Ndrive MP with Optional I/O

(Dimensions without optional I/O are identical)

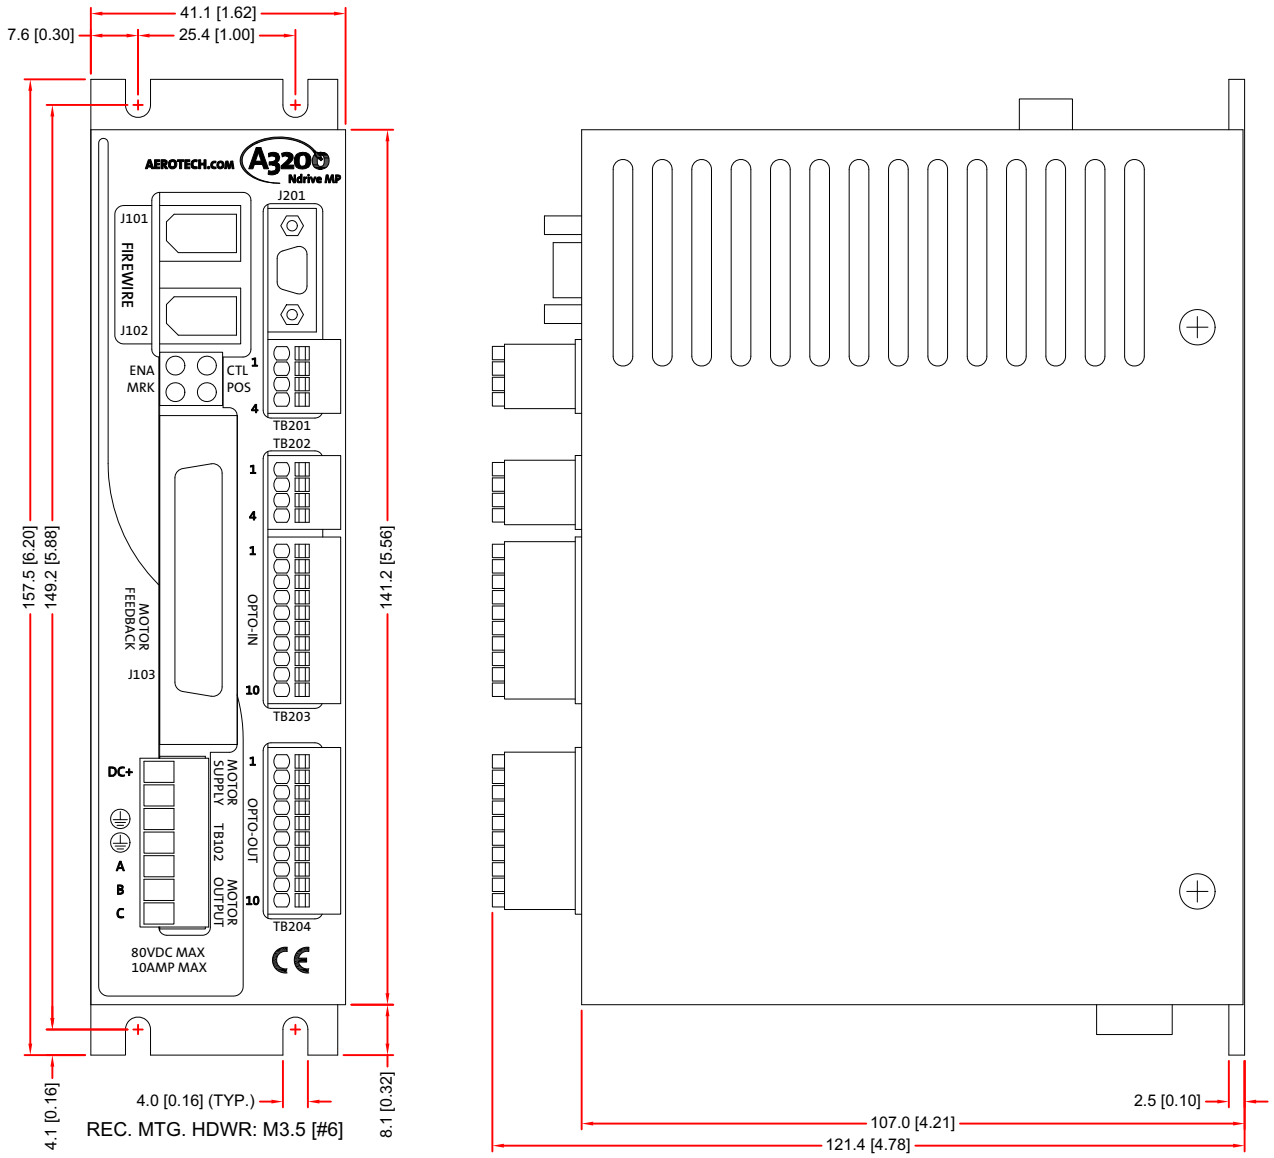

WORLD HEADQUARTERS: Aerotech, Inc., United States • Phone: +1-412-963-7470 • Email: sales@aerotech.com
Aerotech, Ltd., United Kingdom • Phone: +44-118-9409400 • Email: sales@aerotech.co.uk
Aerotech GmbH, Germany • Phone: +49-911-9679370 • Email: sales@aerotechgmbh.de
Aerotech KK, Japan • Phone: +81-47-489-1741 • Email: sales@aerotechkk.co.jp
Aerotech China • Phone: +86-21-5508-6731 • Email: sales@aerotech.com.cn

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Ndrive Series ORDERING INFORMATION

Ordering Example

Ndrive HPe	20	-ENET	RDP1-10K	-S
Base	**Output Current**	**Control Option**	**Resolver Options**	**Power Stage Option**
Ndrive HPe	10 20 30 50 75 100 150	-IO -DUALPSO -TRIPLEPSO -PSOPTO2 -PSOPTO3 -PSOPTO4 -MXH -ENET	RDP1-10K RDP1-7.5K RDP1-5K RDP2-10K RDP2-7.5K RDP2-5K	-S -EXTSHUNT -HS -FAN-115 -FAN-230
Ndrive CP	10 20 30	-IO -MXU		-EXTSHUNT -S
Ndrive MP	10	-IO -MXU		

NDRIVE HPe (PWM)

NDRIVE HPe10 — 5 A continuous, 10 A peak, 240 VAC max motor supply input, and 85-240 VAC control supply input; drives brushless, brush, and stepper motors; includes: 4 opto-isolated digital inputs (sinking or sourcing), 2 high-speed digital inputs, 4 opto-isolated digital outputs (sourcing or sinking), 1 16-bit analog differential input (±10 VDC), 1 16-bit analog output (±10 VDC), 1 24-VDC 1 A brake relay, single-axis PSO capability, 2 quadrature encoder input channels (primary & auxiliary), ESTOP sense input, dedicated Home and Limit inputs

NDRIVE HPe20 — 10 A continuous, 20 A peak, 240 VAC max motor supply input, and 85-240 VAC control supply input; drives brushless, brush, and stepper motors; includes: 4 opto-isolated digital inputs (sinking or sourcing), 2 high-speed digital inputs, 4 opto-isolated digital outputs (sourcing or sinking), 1 16-bit analog differential input (±10 VDC), 1 16-bit analog output (±10 VDC), 1 24-VDC 1 A brake relay, single-axis PSO capability, 2 quadrature encoder input channels (primary & auxiliary), ESTOP sense input, dedicated Home and Limit inputs

NDRIVE HPe30-S — 10 A continuous, 30 A peak, 240 VAC max motor supply input, and 85-240 VAC control supply input; drives brushless, brush, and stepper motors; includes: 4 opto-isolated digital inputs (sinking or sourcing), 2 high-speed digital inputs, 4 opto-isolated digital outputs (sourcing or sinking), 1 16-bit analog differential input (±10 VDC), 1 16-bit analog output (±10 VDC), 1 24-VDC 1 A brake relay, single-axis PSO capability, 2 quadrature encoder input channels (primary & auxiliary), ESTOP sense input, dedicated Home and Limit inputs, 400 W peak internal shunt resistor

NDRIVE HPe50-S — 25 A continuous, 50 A peak, 240 VAC max motor supply input, and 85-240 VAC control supply input; drives brushless, brush, and stepper motor; includes: 4 opto-isolated digital inputs (sinking or sourcing), 2 high-speed digital inputs, 4 opto-isolated digital outputs (sourcing or sinking), 1 16-bit analog differential input (±10 VDC); 1 16-bit analog output (±10 VDC), 1 24-VDC 1 A brake relay, single-axis PSO capability, 2 quadrature encoder input channels (primary & auxiliary), ESTOP sense input, dedicated Home and Limit inputs, 440 W peak internal shunt resistor

NDRIVE HPe75-S — 37 A continuous, 75 A peak, 240 VAC max motor supply input, and 85-240 VAC control supply input; drives brushless, brush, and stepper motors; includes: 4 opto-isolated digital inputs (sinking or sourcing), 2 high-speed digital inputs, 4 opto-isolated digital outputs (sourcing or sinking), 1 16-bit analog differential input (±10 VDC), 1 16-bit analog output (±10 VDC), 1 24-VDC, 1 A brake relay, single-axis PSO capability, 2 quadrature encoder input channels (primary & auxiliary), ESTOP sense input, dedicated Home and Limit inputs, 440 W peak internal shunt resistor

NDRIVE HPe100-S — 50 A continuous, 100 A peak, 240 VAC max motor supply input, and 85-240 VAC control supply input; drives brushless, brush, and stepper motors; includes: 4 opto-isolated digital inputs (sinking or sourcing), 2 high-speed digital inputs, 4 opto-isolated digital outputs (sourcing or sinking), 1 16-bit analog differential input (±10 VDC), 1 16-bit analog output (±10 VDC), 1 24-VDC 1 A brake relay, single-axis PSO capability, 2 quadrature encoder input channels (primary & auxiliary), ESTOP sense input, dedicated Home and Limit inputs, 440 W peak internal shunt resistor

WORLD HEADQUARTERS: Aerotech, Inc., United States • Phone: +1-412-963-7470 • Email: sales@aerotech.com
Aerotech, Ltd., United Kingdom • Phone: +44-118-9409400 • Email: sales@aerotech.co.uk
Aerotech GmbH, Germany • Phone: +49-911-9679370 • Email: sales@aerotechgmbh.de
Aerotech KK, Japan • Phone: +81-47-489-1741 • Email: sales@aerotechkk.co.jp
Aerotech China • Phone: +86-21-3319 7980 • Email: sales@aerotech.com.cn

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Ndrive Series ORDERING INFORMATION

NDRIVE HPe150-S	75 A continuous, 150 A peak, 240 VAC max motor supply input, and 85-240 VAC control supply input; drives brushless, brush, and stepper motors; includes: 4 opto-isolated digital inputs (sinking or sourcing), 2 high-speed digital inputs, 4 opto-isolated digital outputs (sourcing or sinking), 1 16-bit analog differential input (±10 VDC), 1 16-bit analog output (±10 VDC), 1 24-VDC 1 A brake relay, single-axis PSO capability, 2 quadrature encoder input channels (primary & auxiliary), ESTOP sense input, dedicated Home and Limit inputs, 440 W peak internal shunt resistor

NDRIVE HPe I/O Options

-I/O	Expansion board with 16 opto-isolated inputs (sinking or sourcing) and 16 outputs (sinking or sourcing), 3 16-bit differential analog inputs (±10 V), 3 16-bit analog outputs (±10 V), 2 SSI Net, and 1 mechanical brake relay
-MXH	Programmable encoder multiplier up to x65536; supports real-time encoder quadrature output

NDRIVE HPe/HLe Control Options

-DUALPSO	Two-axis PSO firing; second encoder input through AUX connection on Ndrive or through SSINET on I/O board, includes HCPL2601 opto-isolator
-TRIPLEPSO	Three-axis PSO firing; requires I/O option to provide connections for three axes of encoder feedback; includes HCPL2601 opto-isolator
-PSOPTO2	Opto-isolator for PSO; requires IOx option (<+15 V, high speed, low current, 6N136)
-PSOPTO3	Opto-isolator for PSO; requires IOx option (<+30 V, low speed, high current, 4N33)
-PSOPTO4	Opto-isolator for PSO; requires IOx option (TIL117-M, 40 kHz, 5-25 VDC, 50 mA)
-PSOAH	Active-high PSO output
-ENET	10/100 BASE-T Ethernet port

NDRIVE HPe Resolver Options

RDP1-10K	Ndrive 1-channel resolver to digital feedback card with dynamic resolution switching capability; 10 kHz carrier frequency
RDP1-7.5K	Ndrive 1-channel resolver to digital feedback card with dynamic resolution switching capability; 7.5 kHz carrier frequency
RDP1-5K	Ndrive 1-channel resolver to digital feedback card with dynamic resolution switching capability; 5 kHz carrier frequency
RDP2-10K	Ndrive 2-channel resolver to digital feedback card with dynamic resolution switching capability; 10 kHz carrier frequency
RDP2-7.5K	Ndrive 2-channel resolver to digital feedback card with dynamic resolution switching capability; 7.5 kHz carrier frequency
RDP2-5K	Ndrive 2-channel resolver to digital feedback card with dynamic resolution switching capability; 5 kHz carrier frequency

NDRIVE HPe Power Stage Options

-S	40 W continuous internal shunt resistor network – 10/20/30 models; 440 W peak on 50/75/100/150 models
-EXTSHUNT	2-pin connector for external shunt; external shunt resistor not provided
-FAN-115	115 VAC cooling fan for HPe50/75/100/150
-FAN-230	230 VAC external cooling fan for HPe50/75/100/150

WORLD HEADQUARTERS: Aerotech, Inc., United States • Phone: +1-412-963-7470 • Email: sales@aerotech.com
Aerotech, Ltd., United Kingdom • Phone: +44-118-9409400 • Email: sales@aerotech.co.uk
Aerotech GmbH, Germany • Phone: +49-911-9679370 • Email: sales@aerotechgmbh.de
Aerotech KK, Japan • Phone: +81-47-489-1741 • Email: sales@aerotechkk.co.jp
Aerotech China • Phone: +86-21-5508-6630 • Email: sales@aerotech.com.cn

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Ndrive Series ORDERING INFORMATION

NDRIVE CP

NDRIVE CP10	5 A continuous, 10 A peak, 240 VAC max motor supply input, and 85-240 VAC control supply input; supports brush and brushless motors; includes: 4 opto-isolated digital outputs (sinking or sourcing); 6 opto-isolated digital inputs (sinking or sourcing); 1 16-bit analog output; 1 16-bit differential analog input; single-axis PSO capability; 2 quadrature encoder input channels; ESTOP sense input
NDRIVE CP20	10 A continuous, 20 A peak, 240 VAC max motor supply input, and 85-240 VAC control supply input; supports brush and brushless motors; includes: 4 opto-isolated digital outputs (sinking or sourcing); 6 opto-isolated digital inputs (sinking or sourcing); 1 16-bit analog output; 1 16-bit differential analog input; single-axis PSO capability; 2 quadrature encoder input channels; ESTOP sense input
NDRIVE CP30-S	10 A continuous, 30 A peak, 240 VAC max motor supply input, and 85-240 VAC control supply input; supports brush and brushless motors; includes: 4 opto-isolated digital outputs (sinking or sourcing); 6 opto-isolated digital inputs (sinking or sourcing); 1 16-bit analog output; 1 16-bit differential analog input; single-axis PSO capability; 2 quadrature encoder input channels; ESTOP sense input; 40 W internal shunt resistor

NDRIVE CP Control Options

-I/O	Expansion board with 16 opto-isolated inputs (sinking or sourcing); 16 outputs (sinking or sourcing); 1 12-bit analog input; 1 16-bit analog output; brake relay
-MXU	Programmable encoder multiplier up to x4096; no real-time encoder quadrature output

NDRIVE CP Power Stage Options

-S	40 W internal shunt resistor network
-EXTSHUNT	External shunt

NDRIVE MP

NDRIVE MP10	10 A peak, 5 A continuous, 10-80 VDC motor supply input, 24-80 VDC control supply input; supports brush, brushless, and stepper motors; includes: single-axis PSO capability (requires I/O board); 1 quadrature encoder input channel; ESTOP sense input

NDRIVE MP Control Options

-I/O	Expansion board with 8 opto-isolated inputs (sinking or sourcing); 8 outputs (sinking or sourcing); 1 12-bit analog input; 1 16-bit analog output; brake relay; 1 quadrature encoder input, PSO output
-MXU	Programmable encoder multiplier up to x1024; no real-time output

WORLD HEADQUARTERS: Aerotech, Inc., United States • Phone: +1-412-963-7470 • Email: sales@aerotech.com
Aerotech, Ltd., United Kingdom • Phone: +44-118-9409400 • Email: sales@aerotech.co.uk
Aerotech GmbH, Germany • Phone: +49-911-9679370 • Email: sales@aerotechgmbh.de
Aerotech KK, Japan • Phone: +81-47-489-1741 • Email: sales@aerotechkk.co.jp
Aerotech China • Phone: +86 21 3319 7980 • Email: sales@aerotech.com.cn

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP