ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Keysight / Agilent 6621A* at our website: ***Click HERE***

Multiple-Output: 40 W-105 W GPIB



6621A-6624A, 6627A

- Fast up and down programming
- Proven reliability keeps test systems running
- Easy to integrate into a system
- Extensive protection for DUTs

Two, three, or four isolated outputs are integrated into one package, conserving rack space and GPIB addresses. Most of the outputs also provide dual ranges, for more current at lower voltage levels. The outputs can be connected in parallel or series to further increase the flexibility that these products offer the system designer.

Programming is done using industry standard SCPI commands. Test system integration can be further simplified be using the VXI*Plug&Play* drivers. These power supplies help reduce test time with fast up and down programming, which is enhanced by an active downprogrammer which can sink the full rated current.

Specifications

(at 0° to 55°C unless otherwise specified)

		40 W output	40 W output	80 W output	80 W output	105 W output
Output power	Low-range volts, amps	0 to 7 V, 0 to 5 A	0 to 20 V, 0 to 2 A	0 to 7 V, 0 to 10 A	0 to 20 V, 0 to 4 A	0-35 V, 0-3 A
	High range volts, amps	0 to 20 V, 0 to 2 A	0 to 50 V, 0 to 0.8 A	0 to 20 V, 0 to 4 A	0 to 50 V, 0 to 2 A	— —
Output combinations for each model (total number of outputs)	**6621A (2)**	—	—	2	—	—
	6622A (2)	—	—	—	2	—
	6623A (3)	1	1	1	—	—
	6624A (4)	2	2	—	—	—
	6627A (4)	—	4	—	—	—
	6623A(3) Special Order Option J03	—	2	—	—	1
Programming accuracy	Voltage	19 mV + 0.06%	50 mV + 0.06%	19 mV + 0.06%	50 mV + 0.06%	35 mV + 0.06%
	Current	50 mA + 0.16%	20 mA + 0.16%	100 mA + 0.16%	40 mA + 0.16%	30 mA + 0.16%
Readback accuracy (at 25°C ±5°C)	Voltage	20 mV + 0.05%	50 mV + 0.05%	20 mV + 0.05%	50 mV + 0.05%	35 mV + 0.05%
	+Current	10 mA + 0.1%	4 mA + 0.1%	20 mA + 0.1%	8 mA + 0.1%	6 mA + 0.1%
	-Current	25 mA + 0.2%	8 mA + 0.2%	50 mA + 0.2%	20 mA + 0.2%	15 mA + 0.2%
Ripple and noise (peak-to-peak, 20 Hz to 20 MHz; rms, 20 Hz to 10 MHz)						
	Constant voltage rms	500 µV	500 µV	500 µV	500 µV	500 µV
	peak-to-peak	3 mV	3 mV	3 mV	3 mV	3 mV
	Constant current rms	1 mA	1 mA	1 mA	1 mA	1 mA
Load regulation	Voltage	2 mV	2 mV	2 mV	2 mV	2 mV
	Current	1 mA	0.5 mA	2 mA	1 mA	2 mA
Load cross regulation	Voltage	1 mV	2.5 mV	1 mV	2.5 mV	N/A
	Current	1 mA	0.5 mA	2 mA	1 mA	N/A
Line regulation	Voltage	0.01% + 1 mV	0.01% + 1 mV	0.01% + 1 mV	0.01% + 1 mV	0.01% + 1 mV
	Current	0.06% + 1 mA	0.06% + 1 mA	0.06% + 1 mA	0.06% + 1 mA	0.06% + 1 mA

Transient response time Less than 75 µs for the output to recover to within 75 mV of nominal value following a load change within specfications

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Multiple-Output: 40 W-105 W GPIB (Continued)

Specifications

(at 0° to 55°C unless otherwise specified)

	40 W output	40 W output	80 W output	80 W output	105 W output
Supplemental Characteristics (Non-warranted characteristics determined by design and useful in applying the product)					
Average programming resolution Voltage	6 mV	15 mV	6 mV 20 mV (high)	6 mV 20 mV (high)	10.5 mV
Current	25 mA	10 mA	50 mA 20 mA (high)	50 mA 20 mA (high)	15 mA
OVP	100 mV	250 mV	100 mV 2	50 mV	175 mV
Output programming response time (time to settle within 0.1% of full scale output, after Vset command has been processed)	2 ms	6 ms	2 ms	6 ms	6 ms

Supplemental Characteristics for all model numbers

dc Floating Voltage: All outputs can be floated up to ±240 Vdc from chassis ground

Remote Sensing: Up to 1 V drop per load lead. The drop in the load leads is subtracted from the voltage available for the load.

Command Processing Time: 7 ms typical with front-panel display disabled

Down Programming: Current sink limits are fixed approximately 10% higher than source limits for a given operating voltage above 2.5 V

Input Power: 550 W max., 720 VA max.

GPIB Interface Capabilities: SH1, AH1, T6, L4, SR1, RL1, PP1, DC1, DT0.

Regulatory Compliance: Listed to UL1244; conforms to IEC 61010-1; carries the CE mark.

Size: 425.5 mm W x 132.6 mm H x 497.8 mm D (16.75 in x 5.22 in x 19.6 in) See page 103 for more details

Weight: Net, 17.4 kg (38 lb); shipping, 22.7 kg (50 lb)

Warranty Period: Three years

Ordering Information


Opt 100 87 to 106 Vac, 47 to 66 Hz Input, 6.3 A (Japan only)
Opt 120 104 to 127 Vac, 47 to 63 Hz
Opt 220 191 to 233 Vac, 47 to 66 Hz, 3.0 A
Opt 240 209 to 250 Vac, 47 to 66 Hz, 3.0 A
Opt 750 Relay Control and DFI/RI
Opt S50 similar to option 750, however the remote inhibit does not latch
* **Opt 908** Rack-mount Kit (p/n 5062-3977)
* **Opt 909** Rack-mount Kit w/Handles (p/n 5063-9221)
Opt 0L2 Extra Standard Documentation Package
Opt 0B3 Service Manual
Opt 0B0 No documentation package
* Support rails required

Accessories

p/n 1494-0059 Rack Slide Kit
E3663A Support rails for Agilent rack cabinets

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Precision Multiple-Output: 25 W-50 W GPIB

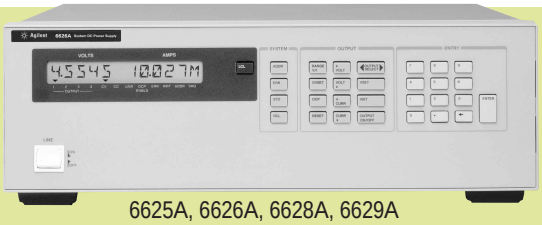

6625A, 6626A, 6628A, 6629A

- Precise V & I programming and readback
- Fast up and down programming
- Extensive protection for DUTs
- Easy to integrate into a system

Two or four isolated outputs are integrated into one package, conserving rack space and GPIB addresses. Dual ranges allow for more current at lower voltage levels. The outputs can be connected in parallel or series to further increase the flexibility that these products offer the system designer. Programming is done using industry standard SCPI commands and test system integration can be further simplified be using the VXI*Plug&Play* drivers. These power supplies help reduce test time with fast up and down programming, which is enhanced by the active down-programmer which can sink the full rated current.

These power supplies are very useful on the R&D bench. The accuracy of both the programming and the measurement systems allow precise control and monitoring of prototype bias power. The extensive protection features protect valuable prototypes, including very fast CV/CC crossover. The power supply can be controlled from either the front panel keypad or, for automated testing, from the GPIB.

Specifications

(at 0° to 55°C unless otherwise specified)

		25 W output	50 W output
Output power	Low-range volts, amps	0 to 7 V, 0 to 15 mA	0 to 16 V, 0 to 200 mA
	High range volts, amps	0 to 50 V, 0 to 500 mA	0 to 50 V, 0 to 1 A or 0 to 16 V, 0 to 2 A
Output combinations for each model (total number of outputs)	**6625A (2) Precision**	1	1
	6626A (4) Precision	2	2
	6628A (2) Precision	—	2
	6629A (4) Precision	—	4
Programming accuracy (at 25°C ±5°C)	Voltage	1.5 mV + 0.016% (low) 10 mV + 0.016% (high)	3 mV + 0.016% (low) 10 mV + 0.016% (high)
	Current	15 µA + 0.04% (low) 100 µA + 0.04% (high)	185 µA + 0.04% (low) 500 µA + 0.04% (high)
Readback accuracy (at 25°C ±5°C)	Voltage	0.016% + 2 mV (low) 0.016% + 10 mV (high)	0.016% + 3.5 mV (low) 0.016% + 10 mV (high)
	+/-Current	0.03% + 15 µA (low) 0.03% + 130 µA (high)	0.04% + 250 µA (low) 0.04% + 550 µA (high)
Ripple and noise	Constant voltage rms	500 µV	500 µV
(peak-to-peak, 20 Hz to 20 MHz; rms, 20 Hz to 10 MHz)	peak-to-peak	3 mV	3 mV
	Constant current rms	0.1 mA	0.1 mA
Load regulation	Voltage	0.5 mV	0.5 mV
	Current	0.005 mA	0.01 mA
Load cross regulation	Voltage	0.25 mV	0.25 mV
	Current	0.005 mA	0.01 mA
Line regulation	Voltage	0.5 mV	0.5 mV
	Current	0.005 mA	0.01 mA
Transient response time change within specfications		Less than 75 µs for the output to recover to within 75 mV of nominal value following a load	
Supplemental Characteristics		(Non-warranted characteristics determined by design and useful in applying the product)	
		25-watt output	**50-watt output**
Average programming resolution	Voltage	460 µV (low)	1 mV (low)
		3.2 mV (high)	3.2 mV (high)
	Current	1 µA (low)	13 µA (low)
		33 µA (high)	131 µA (high)
	OVP	230 mV	230 mV
Output programming response time		6 ms	6 ms
(time to settle within 0.1% of full scale output, after Vset command has been processed)			

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Precision Multiple-Output: 25 W-50 W GPIB (Continued)

Supplemental Characteristics for all model numbers

dc Floating Voltage: All outputs can be floated up to ±240 Vdc from chassis ground

Remote Sensing: Up to 10 V drop per load lead. The drop in the load leads is subtracted from the voltage available for the load.

Command Processing Time: 7 ms typical with front-panel display disabled

Input Power: 550 W max., 720 VA max.

GPIB Interface Capabilities: SH1, AH1, T6, L4, SR1, RL1, PP1, DC1, DT0, C0, E1.

Regulatory Compliance: Listed to UL 1244; conforms to IEC 61010-1.

Size: 425.5 mm W x 132.6 mm H x 497.8 mm D (16.75 in x 5.22 in x 19.6 in) See page 103 for more details

Weight: 6626A, 6629A: Net, 17.4 kg (38 lb); shipping, 22.7 kg (50 lb) 6625A, 6628A: Net, 15.5 kg (34 lb); shipping, 20.8 kg (46 lb)

Warranty Period: Three years

Ordering Information

Opt 100 87 to 106 Vac, 47 to 66 Hz Input, 6.3 A (Japan only)
Opt 120 104 to 127 Vac, 47 to 63 Hz
Opt 220 191 to 233 Vac, 47 to 66 Hz, 3.0 A
Opt 240 209 to 250 Vac, 47 to 66 Hz, 3.0 A
Opt 750 Relay Control and DFI/RI
Opt S50 Similar to option 750, however the remote inhibit does not latch
* **Opt 908** Rack-mount Kit (p/n 5062-3977)
* **Opt 909** Rack-mount Kit w/Handles (p/n 5063-9221)
Opt 0L2 Extra Standard Documentation Package
Opt 0B3 Service Manual
Opt 0B0 No documentation package

* Support rails required

Accessories

p/n 1494-0059 Rack Slide Kit
E3663AC Support rails for Agilent rack cabinets

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Your Requested Excerpt from the Agilent Power Products Catalog

The preceding page(s) are an excerpt from the *2002-2003 Power Products Catalog*. We hope that these pages supply the information that you currently need. If you would like to have further information about the extensive selection of Agilent dc power supplies, ac sources, and dc electronic loads, please visit **www.agilent.com / find / power** to print a copy of the complete Power Products catalog, or to request that a copy be sent to you. You will also find a lot of other useful information on this web site.

In the full Power Products Catalog, you will find that Agilent offers much more than basic power generation. If you need basic, clean, power for your lab bench, it's there. But in each product category, we've also integrated the capabilities that you need for a complete power solution, including extensive measurement and analysis capabilities.

Please give us a call at your local Agilent Technologies sales office, or call a regional office listed below, for assistance in choosing or using Agilent power products.

Keep up to date with Agilent's Test and Measurement Email Updates

As an Email Update subscriber, you will receive periodic customized email updates that match the areas of interest that you have specified. Your update will include products and services, applications and support information, events, and promotions. Sign up today at **www.agilent.com / find / emailupdates**. Check off dc power supplies, ac power sources or electronic loads on your registration form, and we will promptly let you know what's new in power products! Our Privacy Statement at **www.agilent.com / go / privacy** describes our commitment to you regarding your privacy.

To see a copy of the user's guide, please visit our Web site at
www.agilent.com / find / manuals

By internet, phone, or fax, get assistance with all your test & measurement needs

Online assistance:
www.agilent.com / find / assist

Phone or Fax

United States:
(tel) 1 800 452 4844

Canada:
(tel) 1 877 894 4414
(fax) (905) 282-6495

China:
(tel) 800-810-0189
(fax) 1-0800-650-0121

Europe:
(tel) (31 20) 547 2323
(fax) (31 20) 547 2390

Japan:
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Korea:
(tel) (82-2) 2004-5004
(fax) (82-2) 2004-5115

Latin America:
(tel) (305) 269 7500
(fax) (305) 269 7599

Taiwan:
(tel) 080-004-7866
(fax) (886-2) 2545-6723

Other Asia Pacific Countries:
(tel) (65) 375-8100
(fax) (65) 836-0252
Email: tm_asia@agilent.com

Product specifications and descriptions in this document subject to change without notice.

Agilent Technologies

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP