

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *NET 030485-537* at our website: *Click HERE*



© Siemens AG 2007

SIMATIC 505
General

Application

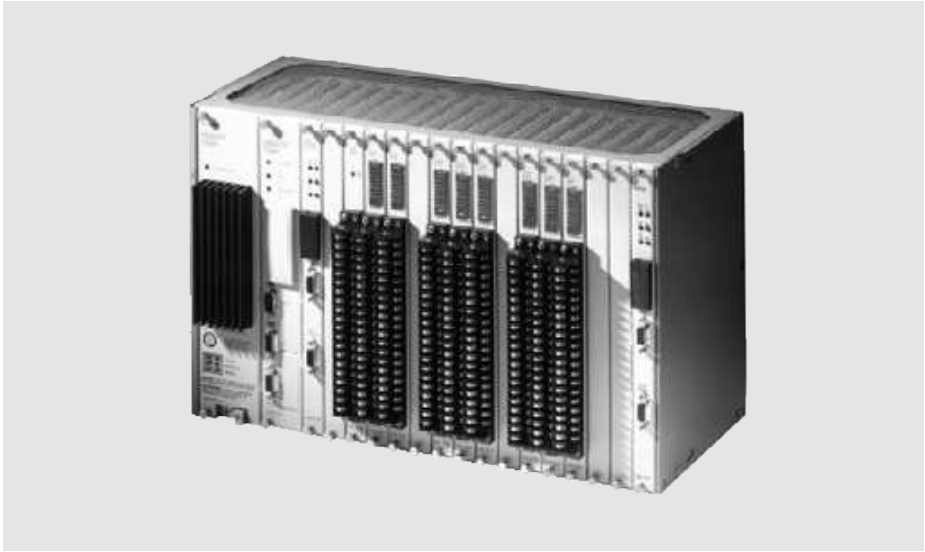


Fig. 5/1 SIMATIC 505 programmable controllers

The SIMATIC 505 programmable controllers provide a special combination of open-loop control tasks, closed-loop control tasks and complex mathematical functions for a large variety of applications in process engineering.

Design

Compactness
The SIMATIC 505 programmable controllers have an extremely compact design corresponding to the state-of-the-art of integrated circuits (ASICs). The latest design technology ensures low space requirements with high performance. System costs and space requirements decrease at the same time as system reliability increases.

Intelligent I/O modules
The SIMATIC 505 programmable controllers have different digital, analog and intelligent I/O modules as well as communications processors available. There are digital module versions with 8, 16, 32 inputs/outputs, and relay module versions with 8, 16, 32 outputs. Analog input/output modules acquire signals from thermocouples and RTD inputs. In addition, there are AT-compatible PC modules and different communications processors (for example, with RS 232 interfaces) available.

Distributed control
The SIMATIC 505 programmable controllers let you take a truly distribued approach to your plant control. First of all they are designed to meet the latest IEC safety and reliability standards to withstand the toughest industrial environments so that they can be placed wherever they are needed. Secondly, a powerful, remote I/O capability enables I/O modules and subracks to be placed as far as 1000 m/3280 ft from the controller itself, thus eliminating the need for long, multiple cable runs to remote sensors and actuators.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

© Siemens AG 2007

Design (continued)

Redundant systems

For critical process applications, the SIMATIC 560T/TI565T systems can be combined with the TI505 I/O modules to form a redundant system. The redundant design reduces any possible down time to a minimum.

Hot backup with single-channel I/O design

The hot backup system consists of a redundant configuration of the CPUs.

The active PLC and the standby PLC are each equipped with a hot backup card.

A fiber-optic connection between the active and the standby PLC executes self monitoring and synchronization of the programs up to four times per cycle.

The active PLC updates the standby PLC automatically and hands over control as soon as a serious fault occurs.

The hot backup system requires no additional programming by the user.

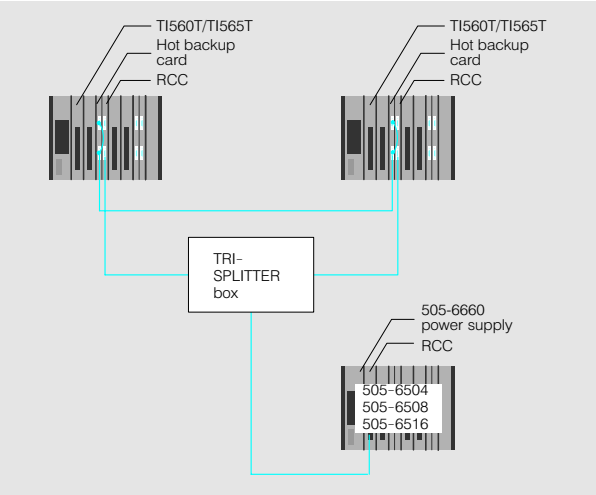


Fig. 5/2 Hot backup with single-channel I/O

It guarantees the integrity of both PLCs even during on-line program edits.

Hot backup with two-channel I/O design

The TI505 I/O system can also operate redundantly.

For this purpose, a special power supply module and the RBC (remote base controller) are installed redundantly (double) in a special redundantly designed mounting rack. The RF-RBC is an intelligent interface between the RCC (remote channel controller) and the redundant mounting rack.

The redundant mounting rack, equipped with 11 slots, contains two power supply modules (110/220 V AC or 24 V DC) and two RBCs. In addition, each redundant mounting rack has two cables so that if one line fails an automatic switch can be made to the other.

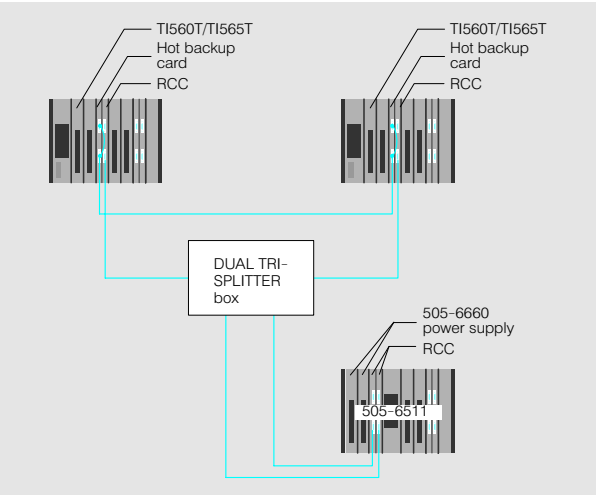


Fig. 5/3 Hot backup with two-channel I/O

In normal mode, one of the redundant RCBs is active and the other is in standby. If an fatal fault occurs in the active RCB, communications are automatically switched to the redundant standby RCB. This takes place within one PLC cycle.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

© Siemens AG 2007

Programming

Ease of use means different things to different people. That's why a choice of different development tools is offered.
The SIMATIC TISOFT package is available for programming the PLC. For those with previous knowledge of process automation, there is SIMATIC APT.

SIMATIC APT uses CASE (computer-aided software engineering) technology which provides for a structured approach to programming while simultaneously enabling mastery of sequential control processes and continuous closed-loop control functions.

APT ensures that the programs are well structured and documented. The data coherence check reduces programming errors to a minimum.

General technical specifications

Safety and reliability	SIMATIC 505 corresponds to the IEC 65A and DIN 41 494 standards for industrial and process control systems.	**Humidity**	In accordance with IEC 68-2-3 Ca. Fault-free operation under environmental conditions up to 95% humidity at 60 °C.
Insulation group	In accordance with IEC 801, Part 2, Paragraph 4. Protection against static electrical discharge to 15 kV.	**Mechanical shock test**	In accordance with IEC 68-2-21 EA test. No detrimental effect in the case of non-repetitive shocks.
Temperature range	In accordance with IEC 68-2-14 NB. Fault-free operation at temperatures fluctuating between 0 to 60 °C.	See Section 1 for further technical specifications	

Ordering data TI525 to TI565

	Order No.		Order No.
Mounting racks		**CPUs** (continued)	
for TI505		**Firmware upgrade kit**	
4 slots	**PPX:505-6504**	for TI545-1101 Version 2.1.1	**PPX:2601099-8005**
8 slots	**PPX:505-6508**	for TI545-1102 Version 3.1	**PPX:2601099-8006**
11 slots, redundant	**PPX:505-6511**	**TI555**	
16 slots	**PPX:505-6516**	8192 digital/8192 analog inputs/outputs,	
Power supply units		memory 384 KB,	**PPX:555-1101**
1 required per mounting rack		memory 1920 KB	**PPX:555-1102**
2 per redundant mounting rack		**TI560T** (with power supply)	
110/220 V AC, single	**PPX:505-6660**	for twisted-pair cable	
110/220 V AC, single or redundant	**PPX:505-6660-A**	• 110 V AC, RS 485, RCC	**PPX:560T1KM-1101**
24 V DC, single or redundant	**PPX:505-6663**	• 24 V DC, RS 485, RCC	**PPX:560T1KM-1102**
CPUs		for coaxial cable connection	
TI525		• 110 V AC, RCC	**PPX:560T4KM-1101**
Memory 10 KB, 512 digital/128 analog inputs/outputs	**PPX:525-1102**	• 24 V DC, RCC	**PPX:560T4KM-1102**
TI535		**TI565T** (with power supply)	
Memory 40 KB, 1024 digital/1024 analog inputs/outputs	**PPX:535-1212**	for twisted-pair cable	
		• 110 V AC, RS 485, RCC	**PPX:565T1KM-1101**
TI545		• 24 V DC, RS 485, RCC	**PPX:565T1KM-1102**
Memory 192 KB, 2048 digital/1024 analog inputs/outputs, 64 controllers	**PPX:545-1102**	for coaxial cable connection	
		• 110 V AC, RCC	**PPX:565T4KM-1101**
TI545		• 24 V DC, RCC	**PPX:565T4KM-1102**
Memory 96 KB, 1024 digital/1024 analog inputs/outputs, 16 controllers	**PPX:545-1103**		

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

© Siemens AG 2007

Ordering data TI525 to TI565	Order No.
CPUs (continued)	
Programming manual for TI505	
German	PPX:505-8104D
English	PPX:505-8104-5
Italian	PPX:505-8104I
Technical product description for TI525/TI535	
English	PPX:505-8103
System manual for TI525, TI535	
English	PPX:505-8106
German[1]	PPX:505-8106D
French[1]	PPX:505-8106F
Technical product description for TI545/TI555	
CPU 1101	
English	PPX:545-8101-4
German	PPX:545-8101D
French	PPX:545-8101F
Italian	PPX:545-8101I
System manuals for TI545/TI555	
CPU 1102, English	PPX:545-555-8101-2
Documentation set TI545 (hardware, design, I/O programming), English	PPX:545-8102
Technical product description for TI545	
English	PPX:545-8103-3
German	PPX:545-8103-3D
French	PPX:545-8103-3F
Italian	PPX:545-8103-3I
System manual for TI555, CPU	
English	PPX:555-8101-2
German	PPX:555-8101-1D
französich	PPX:555-8101-1F
Italian	PPX:555-8101-1I
System manual for TI560T/TI565T, English	PPX:560-65-8109
Programming manual for TI560T/TI565T	
English	PPX:560-65-8102
German[1]	PPX:560-65-8102D
French[1]	PPX:560-65-8102F
Italian[1]	PPX:560-65-8102I
Product description for TI560T/TI565T	
English	PPX:560-65-8107
French	PPX:560-65-8107F
Italian	PPX:560-65-8107I
User manual for redundant I/O, English	PPX:560-65-8108

	Order No.
Controllers	
Controllers for expansion units	
• I/O channel controller (IOCC) for TI535[2]	PPX:505-6830
• Distributed base controller (DBC) for TI535[3]	PPX:505-6840
• Remote channel controller (RCC), coaxial	PPX:560-2126-B
• Remote channel controller (RCC), RS 485 interface	PPX:560-2127-B
• Remote base controller (RBC), coaxial FM mode[4]	PPX:505-6850-A
• Remote base controller (RBC), RS 485 interface[4]	PPX:505-6851-A
• Remote base controller (RBC) for TI560T/565T, max. 4 km, coaxial	PPX:500-21 14-A
• Remote base controller (RBC), for TI560T/565T, max. 1 km, RS 485	PPX:500-5114-A
• 505/6MT controller	PPX:505-5190
• 505/7MT controller	PPX:505-7190
Manuals	
• 7 MT interface adapter	PPX:505-8115-2
• 6 MT interface adapter	on request
Communications modules	
Peerlink module, Point-to-point link between 2 to 16 modules, mixed link between TI500 and TI505, with manual	
• for TI505, 2 redundant channels	PPX:505-7354
• for TI500, 1 channel	PPX:500-5053
• for TI500, 2 redundant channels	PPX:500-5054
TIWAY communications processor NIM with manual	
• 2 redundant interfaces (local line) for TI505	PPX:505-7339
• 2 redundant interfaces (RS232) for TI505	PPX:505-7340
• 2 redundant interfaces (local line) for TI500	PPX:500-5039
• 2 redundant interfaces (RS232) for TI500	PPX:500-5040
UNLINK host adapter with manual and PIM	
• 115 V AC, local line/local line TI-WAY interfaces, computer interfaces RS232C/423	PPX:505-7111
• 115 V AC, RS232C/RS232C TI-WAY interfaces, computer interfaces RS232C/423	PPX:505-7112
• 220 V AC, local line/local line TI-WAY interfaces, computer interfaces RS232C/423	PPX:505-7113
• 220 V AC, RS232C/RS232C TI-WAY interfaces, computer interfaces RS232C/423	PPX:505-7114

1) Available in Europe only.
2) TI535: additional IOCC in basic mounting rack.
3) TI535: DBC as interface in each expansion rack.
4) RBC as interface between CPU and RCC in expansion racks for 560T/565T.

5

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

© Siemens AG 2007

Ordering data

Ordering data 525 to 565	Order No.
Communications modules (continued)	
FIM fieldbus interface module, (with manual) Connection with USS protocol (for SIMOVERT/SIMOREG drives), Profibus link (e.g. ET 200, S5-95U, drives), connection as for expansion rack (remote base)	**PPX:505-7202**
Industrial Ethernet module (NIM/Ethernet) Point-to-point link via Layer 4, connection via TF functionality Layer 7, with manual	**PPX:505-CP1434TF**
MODBUS NIM 2 redundant interfaces, slave stations, with manual (English) and software	**PPX:505-5184**
RS485 coaxial converter for connecting coaxial I/O to TI545/555/575	**PPX:505-6860**
TIWAY TAP Distributor terminal for bus cable	**PPX:2703770-8001**
500 and 505 manual	**PPX:500-8115**
Manuals for TIWAY modules	
• TI505 user description, English	**PPX:TIWAY-8124**
• TI500 user description, English	**PPX:TIWAY-8110**
• TI500 technical description, English	**PPX:TIWAY-8119**
Manuals for UNILINK host adapter	
• Installation manual, English	**PPX:TIWAY-8106**
• User manual, English	**PPX:TIWAY-8121**
• TIWAY system, English	**PPX:TIWAY-8101**
User for FIM,	
German	**PPX:505-8124-2D**
English	**PPX:505-8124-3**
French	**PPX:505-8124-2F**
Italian	**PPX:505-8124-2I**
User for Industrial Ethernet,	
German	**PPX:505-8126-1D**
English	**PPX:505-8126-2**
French	**PPX:505-8126-1F**
Italian	**PPX:505-8126-1I**
MODBUS NIM, English	**PPX:505-8122-1**
I/O modules	
Digital input modules	
• 4 to 15 V DC, 8-point source/sink inputs	**PPX:505-4108**
• 4 to 15 V DC, 16-point source/sink inputs	**PPX:505-4116**
• 4 to 15 V DC, 32-point source/sink inputs	**PPX:505-4132**
• 24 V DC, 8-point source/sink inputs	**PPX:505-4308**
• 24 V DC, 32-point source/sink inputs	**PPX:505-4332**

I/O modules (continued)	Order No.
Digital input modules (cont.)	
• 48/24 V DC, 16 inputs	**PPX:505-4316-A**
• 24 V AC, 8 inputs	**PPX:505-4008-A**
• 24 V AC, 16 inputs	**PPX:505-4016-A**
• 24 V AC, 32 inputs	**PPX:505-4032-A**
• 110 V AC, 8 inputs	**PPX:505-4208-A**
• 110 V AC, 16 inputs	**PPX:505-4216-A**
• 110 V AC, 32 inputs	**PPX:505-4232-A**
• 220 V AC, 8 inputs	**PPX:505-4408-A**
• 220 V AC, 16 inputs	**PPX:505-4416-A**
• 220 V AC, 32 inputs	**PPX:505-4432-A**
• 24 V DC isolated, 16/8 interrupt inputs	**PPX:505-4317**
• 48 V DC, isolated interrupts, 16 inputs/outputs	**PPX:505-4318**
• 125 V DC, isolated interrupts, 16 inputs/outputs	**PPX:505-4319**
• Simulation modules, 32 inputs	**PPX:505-6010**
Digital output modules	
• 24 V DC, 0.5 A, 8 source-only outputs	**PPX:505-4508**
• 24 V DC, 0.5 A, 8 sink-only outputs	**PPX:505-3508**
• 24 V DC, 0.5 A, 16 source-only outputs	**PPX:505-4516**
• 24 V DC, 0.5 A, 16 sink-only outputs	**PPX:505-3516**
• 24 V DC, 0.5 A, 32 source-only outputs	**PPX:505-4532**
• 24 V DC, 0.5 A, 32 sink-only outputs	**PPX:505-3532**
• 24 V DC, 2 A, 8 source-only outputs	**PPX:505-4708**
• 24 V DC, 2 A, 8 sink-only outputs	**PPX:505-3708**
• 24 V DC, 2 A, 16 source-only outputs	**PPX:505-4716**
• 24 V DC, 2 A, 16 sink-only outputs	**PPX:505-3716**
• 24 V DC, 2 A, 32 source-only outputs	**PPX:505-4732**
• 24 V DC, 2 A, 32 sink-only outputs	**PPX:505-3732**
• 115 V AC/DC, 4 A, 16 relay outputs	**PPX:505-5417**
• 24/110 V AC, 0.5 A, 8 outputs	**PPX:505-4608**
• 24/110 V AC, 0.5 A, 16 outputs	**PPX:505-4616**
• 24/110 V AC, 0.5 A, 32 outputs	**PPX:505-4632**
• 110/220 V AC, 1 A, 8 outputs	**PPX:505-4808**
• 110/220 V AC, 1 A, 16 outputs	**PPX:505-4816**
• 110/220 V AC, 1 A, 32 outputs	**PPX:505-4832**
• 220 V AC, 24 V DC, 2 A, 8 relay outputs	**PPX:505-4908**
• 220 V AC, 24 V DC, 2 A, 16 relay outputs	**PPX:505-4916-A**
• 220 V AC, 24 V DC, 2 A, 32 relay outputs	**PPX:505-4932**
• 220 V AC, 24 V DC, 5 A/3 A, 16 relay outputs	**PPX:505-5518**
• Simulation modules, 32 outputs	**PPX:505-6011**

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

© Siemens AG 2007

Ordering data 525 to 565	Order No.
I/O modules (continued)	
Analog input module 8-channel, 12 bits (0-5 V DC/ ± 5V)	**PPX:505-6108-A**
Analog output module 8-channel, 12 bits (0-10 V DC/0-20 mA)	**PPX:505-6208-A**
Analog input/output modules • 8x15 bit input/4x12 bit output (mixed ranges)	**PPX:505-7012**
• 8x13 bit input/4x12 bit high-speed output (mixed ranges)	**PPX:505-7016**
Parallel input/output modules • 8-channel, multiplex TTL, 16-bit word inputs	**PPX:505-6308**
• 8-channel, multiplex TTL, 16-bit word inputs	**PPX:505-6408**
User manual for digital I/O modules	**PPX:505-8105-2**
Manual for 505-4317 interrupt module	**PPX:505-8123-1**
Manual for analog I/O English German French Italian	**PPX:505-8110-2** **PPX:505-8110-2D** **PPX:505-8110-2F** **PPX:505-8110-2I**
Special modules	
Thermocouple/RTD modules (with manual) • 8 inputs, -50 to +50 mV, thermocouples	**PPX:505-7028**
• 8 inputs, -50 to +50 mV, RTD	**PPX:505-7038**
• Calibration connector for RTD module	**PPX:2587705-8009**
User manual for thermocouple module English German French Italian	**PPX:505-8111-3** **PPX:505-8111-2D** **PPX:505-8111-2F** **PPX:505-8111-2I**
User manual for RTD module English German French Italian	**PPX:505-8114** **PPX:505-8114-2D** **PPX:505-8114-2F** **PPX:505-8114-2I**
High-speed counter and encoding module 2 counters, 4 inputs, 4 outputs, counter speed 50 kHz, 5 to 24 V DC, with manual	**PPX:505-7002**
High-speed counter and encoding module 6 counters, 8 inputs, 8 outputs, counter speed 100 kHz, 5 to 24 V DC, with manual	**PPX:505-7003**

	Order No.
Special modules (continued)	
Manual for counter module with 2 counters, English	**PPX:505-8113-2**
with 6 counters, English	**PPX:505-8127-1**
Basic module 2 (RS232C/423) interfaces, memory 28 KB, transmission rate 110-19200 bps	**PPX:505-7101**
Backup battery for basic module	**PPX:2587678-8010**
EEPROM for basic program	**PPX:2587681-8028**
Manual (supplied with module)	**PPX:505-8101-2**
386/ATM module with CPU 30C286SX, RAM 4 MB, hard disk 120 MB, clock frequency 8 or 16 MHz, MS-DOS manual (English) and software	**PPX:505-ATM-4120**
Manual (supplied with module)	**PPX:505-ATM-MANL-3**
Turbo plastic module 5 analog inputs 0 to +5/0 to +10V DC 4 analog outputs, -10 to +10 V DC 4 digital outputs, 15 to 24 V DC	**PPX:505-5100**
Turbo parison module 4 digital inputs/5 analog inputs 4 digital inputs/4 analog inputs	**PPX:505-5103**
Hot backup system	
560T hot backup system with 560/565T hot backup card, upgrade kit (PPX:560-2129-A) and:	
• 2 560T CPU (PPX:560T1KM-1101)	**PPX:560H1KM-1101**
• 2 560T CPU (PPX:560T1KM-1102)	**PPX:560H1KM-1102**
• 2 560T CPU (PPX:560T4KM-1101)	**PPX:560H4KM-1101**
• 2 560T CPU (PPX:560T4KM-1102)	**PPX:560H4KM-1102**
• 2 565T CPU (PPX:565T1KM-1101)	**PPX:565H1KM-1101**
• 2 565T CPU (PPX:565T1KM-1102)	**PPX:565H1KM-1102**
• 2 565T CPU (PPX:565T4KM-1101)	**PPX:565H4KM-1101**
• 2 565T CPU (PPX:565T4KM-1102)	**PPX:565H4KM-1102**
Manuals	
• Hot backup installation instructions, English	**PPX:560-65-8103-2**
• TI505 redundant I/O, English	**PPX:505-8125-2**

5

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

© Siemens AG 2007

SIMATIC 505
Ordering data

Ordering data 525 to 565	Order No.		Order No.
Spares for TI525 to TI555		**Spares for 525 to 555** (continued)	
• Connector: Side access (qty 1)	**PPX:2587705-8010**	**Fuses**	
• Connector: Front access (qty 1)	**PPX:2587705-8011**	• Set, 3 A/125 V, pack of 5, for 505-45xx	**PPX:2587679-8012**
• dummy plate (pack of 5)	**PPX:2587705-8003**	• Set, 3 A/250 V, pack of 5, for 505-48xx	**PPX:2587679-8013**
• Fuse holder for power supply (pack of 4)	**PPX:2587704-8001**	• Set, 3 A/250 V, pack of 5, for 505-46xx	**PPX:2587679-8014**
• Screws for dummy plate (pack of 10)	**PPX:2587705-8001**	• Set, 3 A/250 V, pack of 5, for 505-6660	**PPX:2587679-8015**
• 505 RTD calibration connector	**PPX:2587705-8009**	**Spares for TI560/565**	
• EEPROM for 525/535 for 545/555, 128 KB for 555, 256 KB	 **PPX:2587681-8020** **PPX:2587681-8022** **PPX:2587681-8031**	• 560T digital CPU • 565T special function CPU • 560T/565T power supply module, 110/220 V AC	**PPX:560-2820** **PPX:565-2820** **PPX:560-2122**
• EPROM for 525/535 for CPU 545/555, 128 KB for 555, 256 KB	 **PPX:2587681-8012** on request **PPX:2587681-8030**	• 560T/565T power supply module, 24 V DC	**PPX:560-2123**
• Backup battery for 525/535/545/650T/656T	**PPX:2587678-8005**	• Remote channel controller (RCC) (FM)	**PPX:560-2126-B**
• Programming cable for 545	**PPX:2601094-8001**	• Remote channel controller (RCC) (RS 485)	**PPX:560-2127-B**
• Memory expansion for 545-1101, 256 KB	**PPX:545-1111**	• Hot backup card	**PPX:560-2128-A**
• Relay, 5 A, pack of 5	**PPX:2587704-8002**	• Hot backup upgrade kit (2 modules + cable)	**PPX:560-2129-A**
		• Memory expansion module 64 K words	**PPX:560-2130**
		• Memory expansion module 256 K words	**PPX:560-2136**
		• Distributor box for 565T hot backup, tri splitter	**PPX:2587755-8001**
		• Fiber- optic cable for 565 HBU	**PPX:2587693-8010**

Ordering data 575	Order No.		Order No.
575 CPU 832 KB	**PPX:575-2103**	**Accessories**	
System manual for 575	**PPX:575-8101-4**	• Connecting cable with RS232 interface (for connecting programming devices)	**PPX:VPU200-3605**
575 user manual	**PPX:575-8104-1**	• dummy plate 1" for 575-2124 (9 slots)	**PPX:2589739-8003**
Power supply modules (VME)		• dummy plate 0.2" for 575-2124 (9 slots) or for 575-2128 (14 slots)	**PPX:2589739-8004**
• 115 V AC, 185 watts	**PPX:575-6660**	• dummy plate 0.4" for 575-2124 (9 slots) or for 575-2128 (14 slots)	**PPX:2589739-8005**
• 115/230 V AC, 300 watts	**PPX:575-6663**	• dummy plate 0.6" for 575-2130 (16 slots)	**PPX:2589739-8014**
Interface for expansion unit (RCC) Plug-in card in CPU 575	**PPX:575-2126**	• dummy plate 0.8" for 575-2130 (16 slots)	**PPX:2589739-8015**
Digital input module (VME) with 32 inputs, 110 V AC	**PPX:575-4232**	• Mounting rail for 575-2124 (9 slots)	**PPX:2589739-8001**
Digital output module (VME) with 16 outputs, 110 V AC	**PPX:575-4616**	• Mounting rail for 575-2128 (14 slots)	**PPX:2589739-8002**
Digital input/output module (VME) with 16 I/O, 24 V DC	**PPX:575-4366**	• Mounting rail for 575-2130 (16 slots)	**PPX:2589739-8016**
Mounting rack (VME) 1.0"		• Ventilator set for 575-2130, 115/230 V AC	**PPX:575-2131**
• with 9 slots	**PPX:575-2124**	• J2 backplane bus connector for power supply, 1 slot for all devices (optional)	**PPX:2589739-8012**
• with 14 slots	**PPX:575-2128**	• Daisy chain bridging connector for 575-2124 or for 575-2128	**PPX:2589739-8011**
• with 16 slots	**PPX:575-2130**	• Spare I/O connector	**PPX:2589739-8007**
Coprocessor (optional, Motorola 68882)	**PPX:2589739-8010**	• Spare battery, 4 V, 5 Ah	**PPX:2589739-8006**
		• Spare fuse for 575-6660, 8 A	**PPX:2589739-8008**

5

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP