ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *TDK-Lambda Alpha 400* at our website: ***Click HERE***



- Up to 1500W output
- Up to 16 outputs
- Voltages up to 48V, Current up to 300 Amps
- Fast-on output connection
- Worldwide approvals & CB report
- Medical Approval Option
- 3 Year Warranty

Alpha

400, 600, 1000 & 1500 Watts Modular

Key Market Segments & Applications

Instrumentation
Medical
Automation
Security
Network Servers and Routers
Broadcast
ATE
Industrial Computing
Lifesciences/Laboratory

INPUT		
Input Voltage	Alpha 400 Alpha 600 Alpha 1000 Alpha 1500	90 - 264Vac 90 - 264Vac, 160 - 358Vdc 85 - 264Vac, 120 - 360Vdc 85 - 264Vac (1000W below 150Vac input)
Input Frequency	47 - 63Hz (440Hz with reduced PFC - consult factory)	
Inrush Current	<50A at 25°C and 264Vac (cold start)	
Input Fuse	250Vac HBC Fast Acting (not user accessible) 10A for 400W 12A for 600W 20A for 1000W and 1500W	
Leakage Current	1.1mA max at 264Vac & 63Hz	
Lower Leakage Option	see configuring guide	
Power Factor	0.99 typical	

OUTPUT		
Voltage / Current	See module output table	
Turn on Delay	1.5s max	at 90Vac (150Vac for Alpha 1500W) & 100% rated output power
Rise Time	<50ms	to 90% of voltage, monotonic rise above 10%
Turn on Overshoot	<5% or 250mV	Load type dependant, no overshoot with resistive load
Efficiency	75%	typical at 230Vac & 100% rated power, config dependent
Hold up	15ms min	at 90Vac & 100% rated output power 13ms for 1000W, 8ms for 1500W and at 207Vac for 1500W
Ripple & Noise	<2%	(or 100mV if greater) Pk- Pk, using EIAJ test method & 20MHz bandwidth
Voltage Accuracy	<1%	of set Voltage
Remote Sense	Yes	Standard on single output modules
Minimum Load	No	on any output
Temperature Coefficient	<0.02%	of rated voltage per °C
Load Regulation	<0.5% or 25mV	for 0-100% load change (with sense connected, <2% without)
Line Regulation	<0.5%	for 90 - 264Vac input change (210-264Vac for 1500W)
Cross Regulation	<0.2%	for 100% load change on any other output
Transient Response Recovery	<10%	of set voltage for 50% load change (above 25% load)
	500μs	for recovery to 1% or 100mV of set voltage (1000μs for S module)
Over Voltage Protection	Standard	for all outputs
Over Current Protection	Standard	for all outputs
Short Circuit Protection	<150%	of rated current, when output voltage <1%
Over Temperature Protection	Yes	Shuts down all outputs. Cycle ac off / on to reset
		Note shutdown temp varies according to ambient, output power and input V

SAFETY APPROVALS

	Date	Amendments		Date	Amendments
EN 60950-1	2001		IEC 60601-1a	1988	A1, A2
UL 60950-1	2003		UL 60601-1a	2003	
CSA22.2 No 60950-1	2003		CSA 60601-1a	2003	
IEC60950-1*	2001		CE Mark	LV Directive 2006/95/EC (EN60950-1)	

* CB Certificate and report available on request

a - Only for LL, RL and TL leakage variants. CA400 + CA1000 only

PRODUCT, GENERIC & COLLATERAL STANDARDS

Low Voltage Power Supply, EMC	EN61204-3: 2001	Compliant to High Severity Immunity	Class A emissions for CA1000 / CA1500
Medical Electrical Equipment, EMC	EN61601-1-2: 2001	Compliant	Class A emissions for CA1000 / CA1500
Immunity for residential, commercial and light industrial environments	EN61000-6-1: 2001	Compliant	
Immunity for industrial environments	EN61000-6-2: 2001	Compliant	
Emissions for residential, commercial and light industrial environments	EN61000-6-3: 2001	Compliant	CA1000 and CA1500 not compliant
Emissions for industrial environments	EN61000-6-4: 2001	Compliant	

EMISSIONS

Radiated Electric Field	EN55022	Class B (as per CISPR.22) Class A for Alpha 1000/1500	See application note for details. Only for 'S' type leakage versions
Conducted Emissions	EN55022	Class B (as per CISPR.22) Class A for Alpha 1000/1500	Only for 'S' type leakage versions. 'M' & 'L' types meet Class A
Conducted Harmonics	EN61000-3-2: 2001	Compliant to Class A	
Flicker	EN61000-3-3: 1995 + A1:2001	Compliant - d_{max} only.	

IMMUNITY

				Criteria
Electrostatic Discharge	EN61000-4-2	Level 4	Air discharge 15kV Contact discharge 8kV	A
Electromagnetic Field	EN61000-4-3	Level 3	10V/m (tested to 12V/m)	A
Fast / Burst Transient	EN61000-4-4	Level 4	Input 4kV Outputs 2kV, Tested at 5kHz and 100kHz	A
Surge Immunity	EN61000-4-5	Level 3	Line to Line (Differential) 1.1kV Line to Earth (Common Mode) 2.2kV	A
Conducted RF Immunity	EN61000-4-6	Level 3	10V (tested to 12V)	A
Power Frequency Magnetic Field	EN61000-4-8	Level 4	30A Continuous	A
Voltage Dips, Variation, Interruptions	EN61000-4-11	Class 3		A B for 5s interruptions
Voltage Fluctuations	EN61000-4-14	Class 3	For 100 to 240V nominal	A

ENVIRONMENT

Temperature	0°C to 70°C operational, -40° to 85°C storage (max 12 months)
Derating	50°C to 70°C derate each output by 2.5% per °C
Low Temperature Start-up	-20°C
Humidity	5-95% RH non condensing
Shock	3000 shocks, each of 10*g* (16ms) half sine
Vibration	10 - 200Hz @ 1.5*g*
Altitude	3,000 metres operational (15,000 metres non operational)
Pollution	Degree 2, Material group 3
IP Rating	IP 10

ISOLATION

Input to Output	Reinforced	4.3 kV (dc)	Output to Earth	Operational	500 V (dc)
Input to Earth	Basic	2.3 kV (dc)	Output to Output	Operational	500 V (dc)

OUTPUT VOLTAGES (single output modules)			
Module	Adjustment	Amps	Slots
A	4.5 - 5.5	60	2
AA	4.5 - 6.5	60	2
B	4.5 - 5.5	25	1
BB	4.5 - 6.5	25	1
C	5 - 16	16[a]	1
D	18 - 29	8	1
F	9 - 16	33	2
G	17.5 - 29	25[b]	2
J	30 - 48	10[c]	2
K	18 - 29	15	2
L	1.8 - 3.2	25	1
M	5 - 16	8	1
N	18 - 32	5[d]	1
Q	2.7 - 3.9	25	1
R	2.7 - 3.9	60	2
S	2.5 - 5.7	85	2
T	1.8 - 3.2	60	2
U	10 - 21	16	1
W	4.5 - 5.5	15	1
Z	4.5 - 5.5	25	1

(twin output modules)					
Module	V1 Adjustment	Amps	V2 Adjustment	Amps	Slots
E	5 - 16	8	5 - 16	8	1
EB	4.5 - 5.5	9	4.5 - 5.5	9	1
EQ	4.5 - 5.5	9	2.7 - 3.9	9	1
H	18 - 32	5	18 - 32	5	1
P	18 - 29	5	5 - 16	8	1


a) 12A max above 12V
b) 21A max above 24.5V
c) Derate output current by 0.25A / V above 40V
d) 1A max above 29V

Alpha Configuring Guide

The extensive range of output modules and options make it possible to achieve many combinations of Volts and Amps. To achieve the optimum configuration, please contact our sales office. However you can also create your own configuration from this datasheet by using the guide below.

Configuring from Datasheet

1 Calculate total output power to determine Alpha 400W, 600W, 1000W or 1500W and select converter, then select required Cooling and Leakage Current from the following table:-

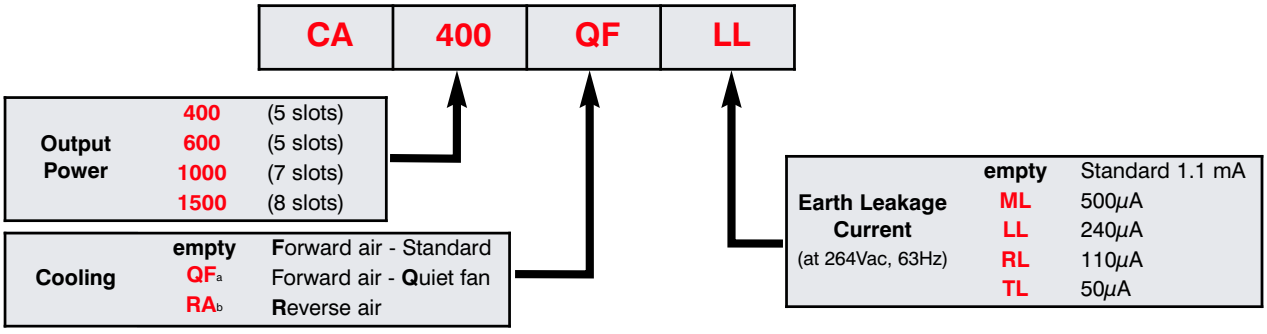

Notes:
a) CA400/600 only. CA400 derates to 300W, CA600 derates to 475W
b) Contact sales office for details


2 Select Output Modules and Options from the Output Voltages tables.
Example - if you require 5.2V / 18A with output inhibit : -
a) select B as closest match for voltage and current and prefix with voltage (e.g. **5.2B**)
b) add suffix for option (if required)
'_PA' for parallel/current share (for N+1 redundant applications)
'_PP' for parallel (increase current from one PSU)
'_IN' for inhibit
'_RP' for remote programming
'_MF' (only applicable on 1st module) for global inhibit, ac fail and 5V/50mA standby supply
c) repeat for other outputs

Ensure that the total width of all selected modules is within the slots for the chosen converter. For example:-

CA600LL 5A 12/12E 24D which represents a four output 600W Alpha with Forward air, 240µA Earth Leakage, with:-
Output 1 = 5V / 60A with remote sense
Output 2 = 12V / 8A
Output 3 = 12V / 8A
Output 4 = 24V / 8A with remote sense


3 **Contact TDK-Lambda to validate configuration and issue a part number.**

Option Connections




IN, PA, PP, RP Option


Pin	IN option	PA option	PP option	RP option	MF option
1	n/c	+ Sense	+ Sense	+ Sense	Inhibit (low)
2	Module Good	Module Good	n/c	- Sense	5V supply
3	Inhibit	Star point	n/c	Control 2	Power Fail
4	n/c	- Sense	- Sense	n/c	0V
5	- Power	- Power	n/c	Control 1	Inhibit (high)
6	- Power	Star point	n/c	n/c	n/c

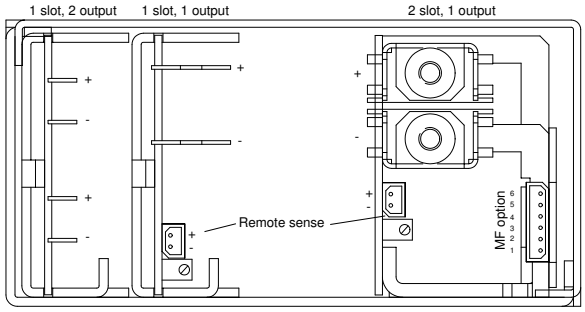


Alpha 400

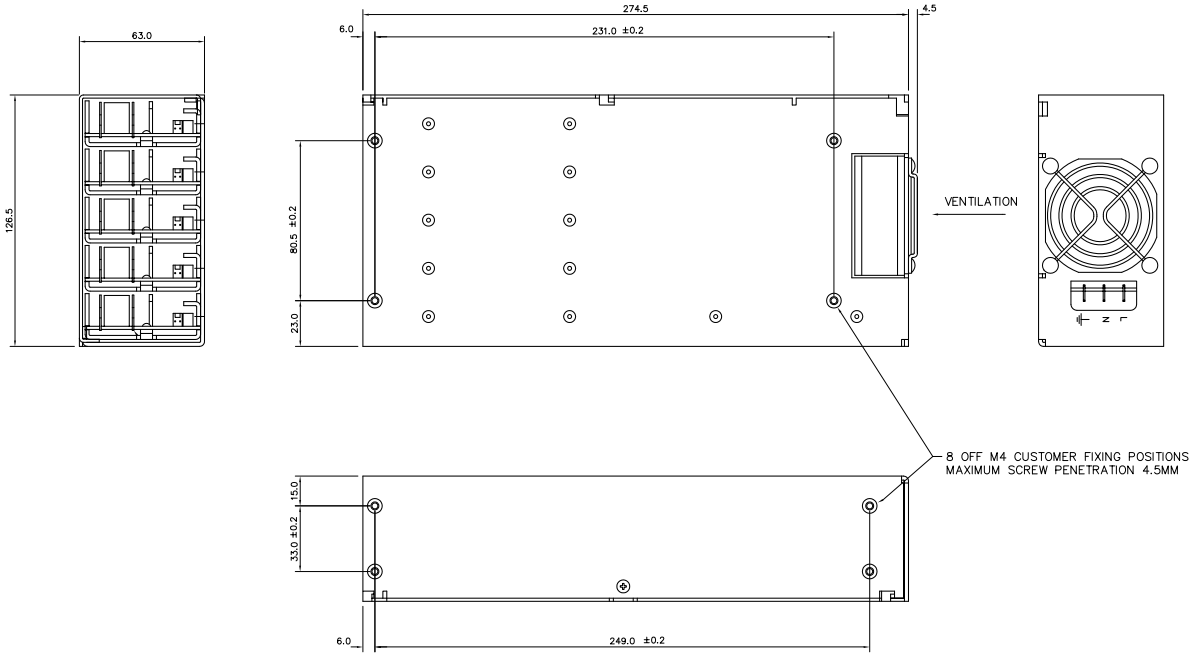


Alpha 600

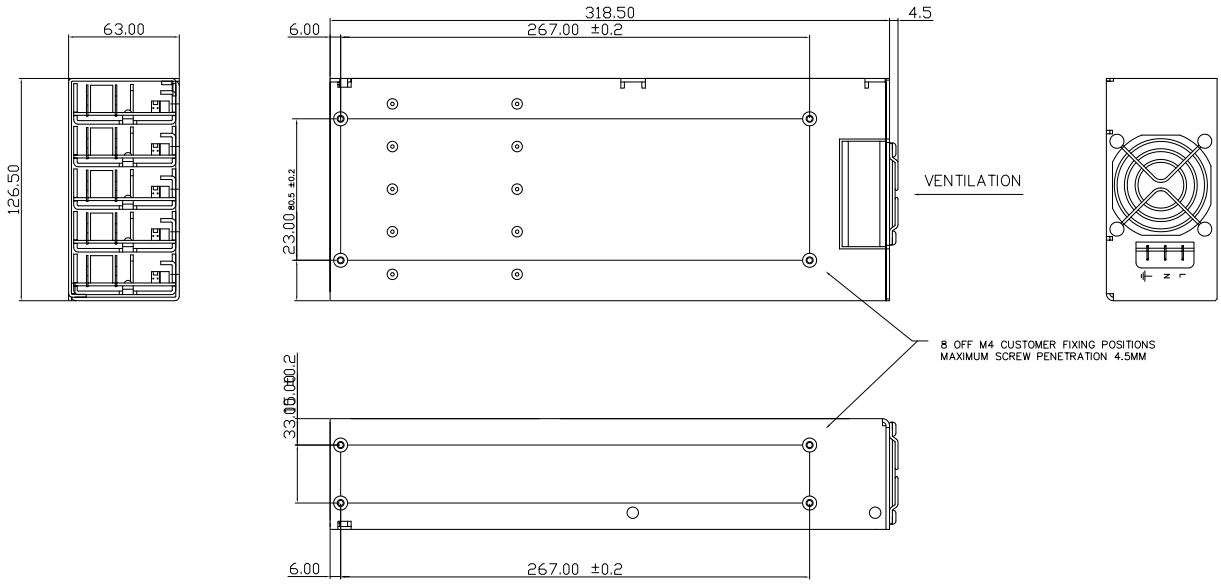

Alpha 1000

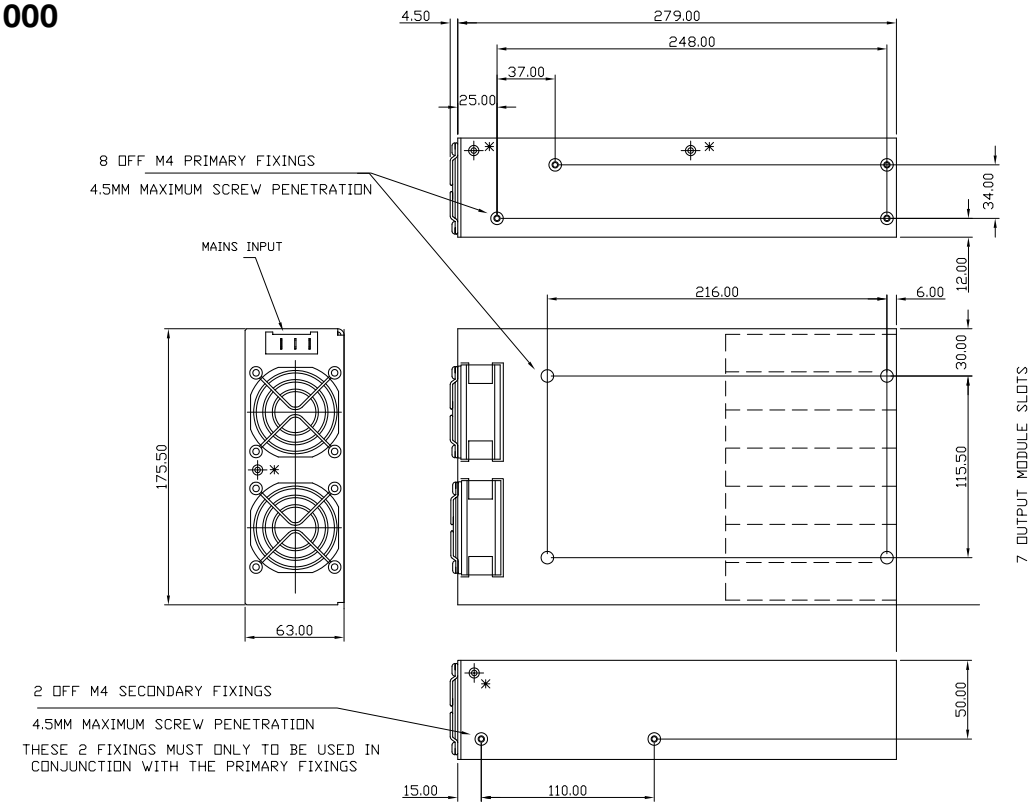

Alpha 1500

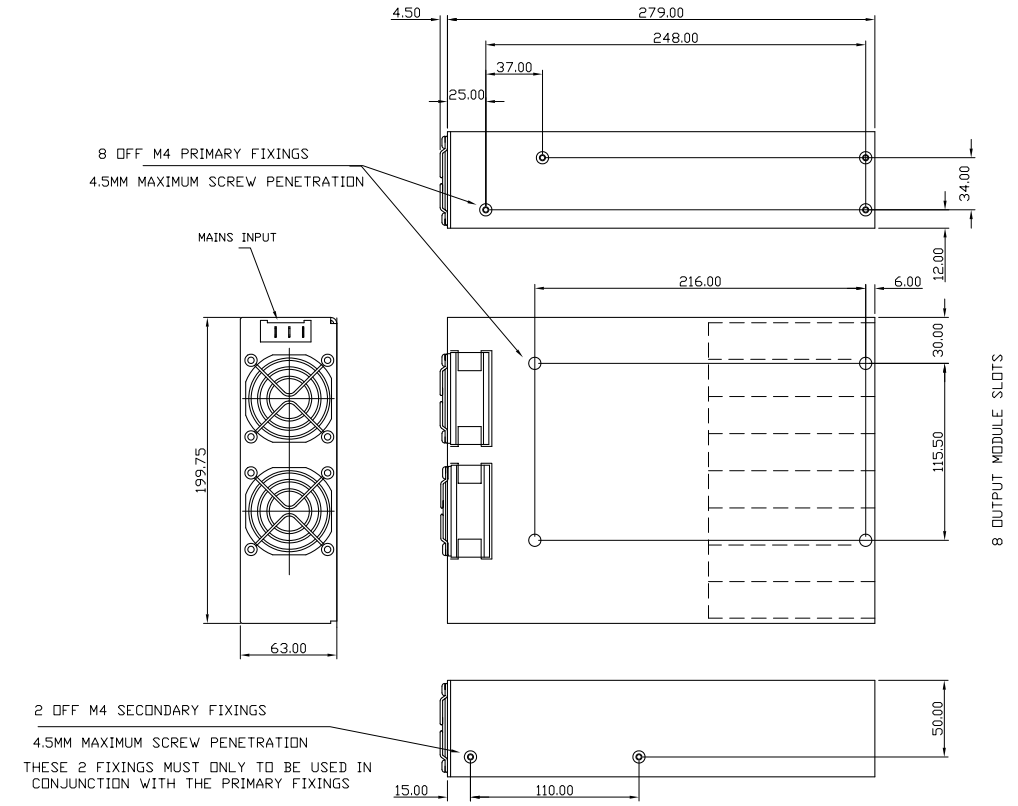

TDK-LAMBDA EMEA

AUSTRIA
TDK-LAMBDA GERMANY GmbH
Aredstraße 22
A-2544 Leobersdorf
Telephone: +43 (0) 2256 655 84
Facsimile: +43 (0) 2256 645 12
Web: www.lambda-austria.com

FRANCE
TDK-LAMBDA FRANCE SAS
ZAC des Delaches, BP1077 - Gometz le Chatel
91940 Les Ulis
Telephone: +33 (0) 1 60 12 71 65
Facsimile: +33 (0) 1 60 12 71 66
Web: www.lambda-f.com

GERMANY
TDK-LAMBDA GERMANY GmbH
Karl-Bold-Straße 40
D-77855 Achern
Telephone: +49 (0) 78 41 666 0
Facsimile: +49 (0) 78 41 5000
Web: www.lambda-germany.com

ISRAEL
NEMIC LAMBDA LTD
Kibbutz Givat
Hashlosha 48800
Telephone: +972 (0) 3 902 4333
Facsimile: +972 (0) 3 902 4777
Web: www.nemic.co.il

ITALY
TDK-LAMBDA ITALY s.r.l.
Via dei Lavoratori 128/130,
20092, Cinisello Balsamo (Mi)
Telephone: +39 (0) 02 61 29 38 63
Facsimile: +39 (0) 02 61 29 09 00
Web: www.lambda-italy.com

SWEDEN
TDK-LAMBDA SCANDINAVIA
PO Box 546, Rallervägen 41
SE-184 25. Åkersberga
Telephone: +46 (0) 8 598 94 090
Facsimile: +46 (0) 8 540 66 096
Web: www.lambda-scandinavia.com

UK
TDK-LAMBDA UK
Kingsley Avenue
Ilfracombe Devon EX34 8ES
Telephone: +44 (0) 1271 856666
Facsimile: +44 (0) 1271 864894
Web: www.lambda-gb.com

TDK-LAMBDA NORTH AMERICA

visit http://us.tdk-lambda.com/ for a list of TDK-Lambda offices and distributors

TDK-LAMBDA ASIA

visit http://www.tdk-lambda.com/ for a list of TDK-Lambda offices and distributors

LOCAL DISTRIBUTION

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP