

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.


Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

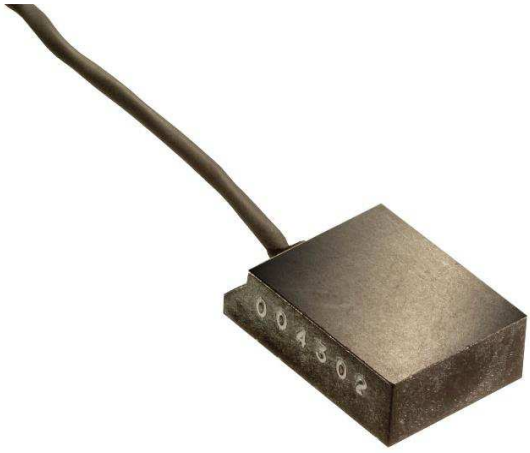

ACCELEROMETER ACH-01

SPECIFICATIONS

- **Piezoelectric Accelerometer**
- **Wide Bandwidth; AC Coupled**
- **Ultra Low Power**
- **High G Ranges**

The ACH-01 is an inexpensive, general purpose accelerometer with outstanding performance characteristics. The use of piezoelectric polymer film in the ACH-01 provides many cost/performance advantages that allow it to be used in a wide range of applications where the use of traditional accelerometer technology is impractical. It is specifically designed for high volume applications which require the permanent installation of an accelerometer.

dimensions

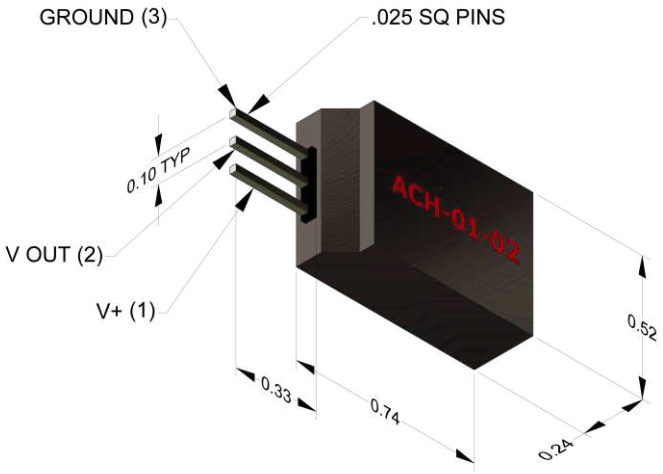


Figure 1 ACH-01-02

FEATURES

- **Wide Frequency Response**
- **Excellent Phase Response**
- **Small Temperature Dependence**
- **Wide Supply Voltage Range**
- **Excellent Linearity**
- **Very High Resonant Frequency**
- **Wide Dynamic Range**
- **Low Transverse Sensitivity**
- **Wide Temperature Range**
- **Low Impedance Output**
- **Ultra Low Power**

APPLICATIONS

- **Machine Health Monitoring**
- **Model Analysis**
- **Automotive Sensors**
- **Appliances**
- **Feedback Control Systems**

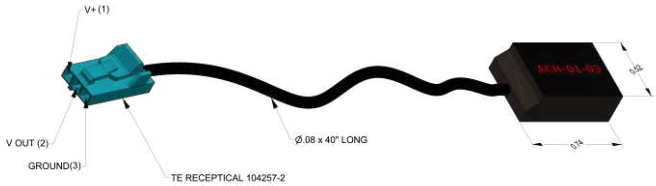


Figure 2 ACH-01-03

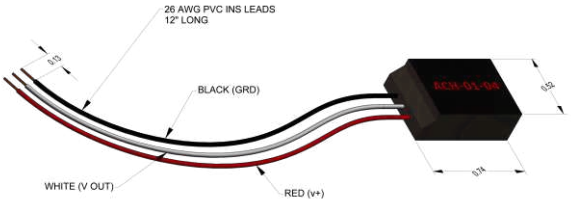


Figure 3 ACH-01-04


PERFORMANCE SPECIFICATIONS

PERFORMANCE (T=25EC)	Symbol	Min	Typ	Max	Units
Sensitivity	M_o	7	9	11	mV/g
Lower Frequency Limit [1]	f_l	--	2	5	Hz
Upper Frequency Limit [1]	f_u	10	20	--	kHz
Equivalent Noise Floor 10Hz 100Hz 1kHz		 -- -- --	 130 20 6	 -- -- --	$\mu g/\sqrt{Hz}$
Dynamic Range	--	∀150	--	--	g
Linearity	--	--	0.1	1.0	%
Transverse Sensitivity	M_t	--	2.0	5	%
Resonant Frequency	f_o	--	35	--	kHz
Phase Deviation (∀5E Limit) [6]	θ	10	--	10	kHz
Drain Voltage [6]	V+	3	--	40	Volts
Supply Current [6]	I_{dss}	30	--	90	µA
Output Impedance [6]	--	--	20	--	kΩ
ENVIRONMENTAL CHARACTERISTICS					
Operating Temperature [2]	T_o	-40	--	85	EC
Storage Temperature	T_s	-40	--	85	EC
Maximum Shock Level	A_m	1000	--	--	g
Base Strain Sensitivity [3]	--	--	0.3	--	g/µε
Transient Temp Sensitivity [4]	--	--	0.35	--	g/EC
PHYSICAL CHARACTERISTICS					
Weight Cable [5]	W	--	8	--	grams

1. ∀3 dB limit
2. ∀2 dB from nominal M_o at 1 kHz
3. @ 250 µε in base plane
4. @ 3 Hz LLF
5. Includes 40" cable and connector

Mounting methods play a critical role in determining the overall performance of any accelerometer. The ACH-01 is no exception. An improperly mounted accelerometer can give erroneous results. We recommend using an Adhesive Mounting Method.

The surface should be flat. The area where the ACH-01 is to be mounted should be thoroughly cleaned to remove any dirt or oil present on the surface. Use a quick setting, viscous methyl cyanoacrylate adhesive or a non-compliant epoxy. Apply the adhesive sparingly to one surface following the manufacturer's directions. Apply pressure and allow the adhesive to set. Soft adhesives, such as double-sided tape or pressure sensitive adhesives, should not be used since they can adversely affect the ACH-01's performance. Cable should be adhered to the surface.

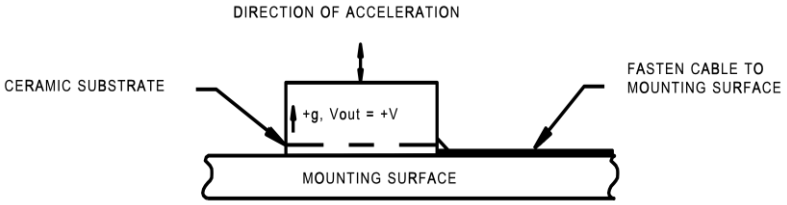

There is an interface amplifier available to simplify connection to the ACH-01, the IB-ACH-01. Please see the appropiate data sheet.


In an effort to keep the product cost low, the ACH-01 uses a ceramic substrate as the mounting base. Because of this, the ACH-01 is susceptible to base strain and temperature transient effects. A mechanically rigid and thermally non-conductive mounting surface is highly recommended to limit these effects. MEAS application engineers are available to recommend various mounting arrangements for your specific application.



Figure 4 IB-ACH-01

ELECTRICAL INTERFACE CIRCUITS

The accelerometer ACH-01 accommodates various electrical interface circuits. A typical example is provided in the following figure. The ACH-01 equivalent electrical schematic is also shown.

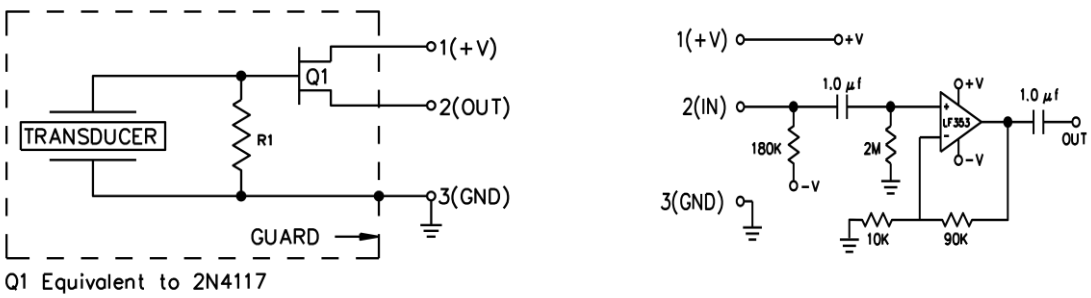

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

ORDERING INFORMATION

Description	Interface	Model No.	Part No.
Accelerometer	Pins	ACH-01-02	11026891-00
	Shielded Cable	ACH-01-03	11026945-00
	Discrete Wires	ACH-01-04	11027661-00
Amplifier	Amplifier Box	IB-ACH-01	11028363-00

NORTH AMERICA
Measurement Specialties, Inc.,
a TE Connectivity Company
Tel: +1-800-522-6752
Email: customercare.dtmd@te.com

EUROPE
MEAS Deutschland GmbH
a TE Connectivity Company
Tel: +49-800-440-5100
Email: customercare.dtmd@te.com

ASIA
Measurement Specialties (China), Ltd.,
a TE Connectivity Company
Tel: +86 0400-820-6015
Email: customercare.chdu@te.com

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2022 TE Connectivity Ltd. family of companies All Rights Reserved.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP