ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Keysight / Agilent E1353A* at our website: ***Click HERE***

Agilent E1353A
16-Channel T/C FET Multiplexer
Data Sheet

- 1-Slot, B-size, register based
- Up to 13,000 channels/s scanning with Agilent DMMs
- 100,000 switches/s from downloaded scan list
- Built-in thermistor reference junction
- Temperature, voltage, current, and Ohm readings
- 16-channel 3-wire, or 8-channel 4-wire multiplexer

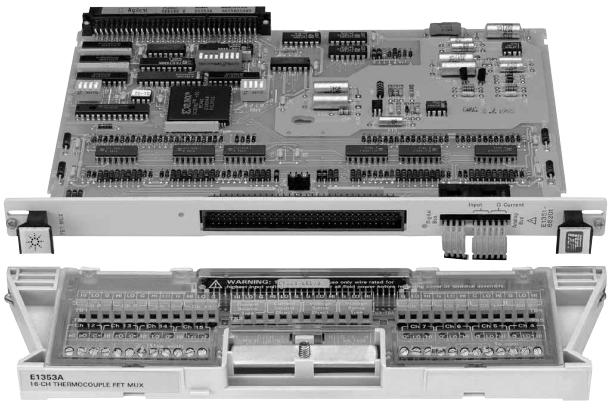

Agilent E1353A

Description

The Agilent E1353A FET Multiplexer is a **B-size, 1-slot, register-based VXI module** that switches 16 channels each of high, low, and guard. When used with the E1326B DMM or E1411B DMM, it makes automatically compensated thermocouple temperature measurements. The FET multiplexer module consists of a B-size component card (labeled E1351-66201) and a screw terminal block that plugs onto the component card. The E1353A is functionally similar to the E1351A and E1352A.

Common high, low, and guard signals are connected by tree switch to both the tree terminals on the terminal card and the analog bus connector. A digital bus cable is shipped with each module. It attaches to a digital bus connector on the faceplates, and is used to synchronize scanned measurements up to 13,000/s with the Agilent DMMs. Additionally, shunt and series signal conditioning elements can be added to each channel.

Refer to the Agilent Technologies Website for instrument driver availability and downloading instructions, as well as for recent product updates, if applicable.

Configuration

Common high, low, and guard signals are connected by tree switch to both the tree terminals on the terminal card and the analog bus connector.

A digital bus cable is shipped with each module, which attaches to a digital bus connector on the faceplates and is used to synchronize scanned measurements up to 13,000/ second with either the E1326B DMM or E1411B DMM. Use of this bus requires the SCPI command TRIGger:SOURce DBUS. To connect an external DMM to the FET multiplexer for high-speed scanning synchronization up to 100,000 switches/ second, order the digital FET MUX-to-DMM cable below.

One analog bus cable is shipped with each module, making it easy to connect multiplexer common outputs together for slot-adjacent modules. If you are using a B-size mainframe, E1300B or E1301B, use the analog bus cable shipped with the E1326A DMM to connect it to the multiplexer(s).

C-size Adapter

For installing the E1353A in a C-size mainframe, the E1403C active adapter is recommended.

Agilent Technologies

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Product Specifications

Input

DC:

Maximum voltage (any terminal to any other terminal or chassis): 16 Vpk

AC rms:

Maximum voltage (any terminal to any other terminal or chassis): 16 Vpk

Maximum current (per channel common, non-inductive): 1 mA

DC

Maximum thermal offset per channel, differential Hi-Lo: 25 µV (0 to 28 °C), 250 µV (28 to 55 °C)

Closed channel resistance: <3.1 kΩ

Insulation resistance (between any two points): 10E8 Ω, 10E3 Ω ± 10% guard to chassis

Insulation resistance (Hi to Lo, power off): >1 kΩ for |Vin| <14 V, >220 Ω for |Vin| >14 V

AC

Minimum bandwidth (–3 dB, 50 Ω source/load): 500 kHz (1 MOhm || 10 pF termination)

Closed channel capacitance: <2000 pF Hi/Lo-Chassis, <200 pF Hi-Lo

General Characteristics

Relays FETs
Break-before-make

Power down state: FETs open on power down

Power up state: FETs open on power up

Minimum relay life:

No load: Unlimited

Rated load: Unlimited

Reference junction measurement accuracy (18 to 28 °C operating): 0.3 °C

Screw terminal wire size: 16 to 26 AWG (1.5, 1.2, 0.9, 0.75, 0.5 mm)

Scanning rate: 13,000 channels/s typ.

General Specifications

VXI Characteristics

VXI device type: Register based, A16, slave only

Size: B

Slots: 1

Connectors: P1

Shared memory: None

VXI busses: None

C-size compatibility: Requires E1403C

Instrument Drivers

See the Agilent Technologies Website (http://www.agilent.com/find/inst_drivers) for driver availability and downloading.

Command module firmware: Downloadable

Command module firmware rev: A.03

I-SCPI Win 3.1: Yes

I-SCPI Series 700: Yes

C-SCPI LynxOS: Yes

C-SCPI Series 700: Yes

Panel Drivers: Yes

VXI*plug&play* Win Framework: Yes

VXI*plug&play* Win 95/NT Framework: Yes

VXI*plug&play* HP-UX Framework: No

Module Current

	I_{PM}	I_{DM}
+5 V:	0.2	0.01
+12 V:	0.13	0.01
–12 V:	0	0
+24 V:	0	0
–24 V:	0	0
–5.2 V	0	0
–2 V:	0	0


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Cooling/Slot

Watts/slot:	1.00
ΔP mm H_2O:	0.02
Air Flow liter/s:	0.10


Ordering Information

Description	Product No.
16-Channel T/C FET Multiplexer	E1353A
Service Manual	E1353A 0B3
Terminal Card, 16-Chan FET Multiplexer	E1353-80001
Cable Kit, VM To B-Size FET Multiplexer	E1411-80001

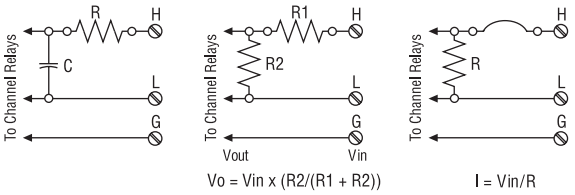


Low Pass Filter Configuration **Attenuator Configuration** **Current Sensing Configuration**

Signal conditioning components and current shunt for E1353A

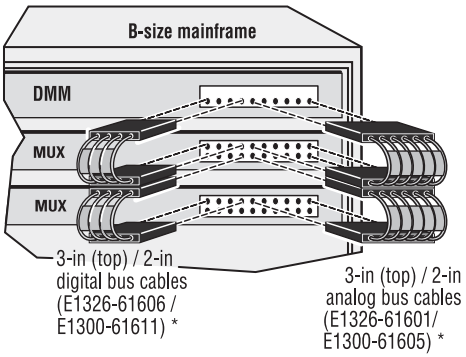

Analog and Digital Bus Cables for MUX-to-MUX and MUX-to-Multimeter Connections

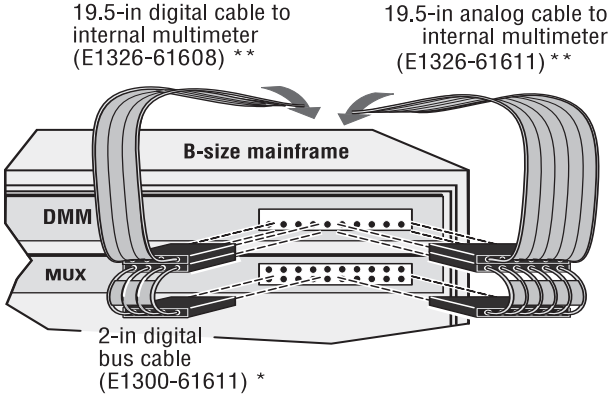

* DMM-to-MUX and MUX-to-MUX analog and digital bus cables are provided with the purchase of the DMM and MUX modules, respectively.

** 19.5-in analog and digital bus cable is provided with the purchase of E1300/01B Series B mainframe with internal DMM option.

Analog and Digital Bus Cables for MUX-to-MUX and MUX-to-Multimeter Connections

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Related Literature

2000 Test System and VXI Catalog CD-ROM,
Agilent Pub. No. 5980-0308E (detailed specifications for VXI products)

2000 Test System and VXI Catalog,
Agilent Pub. No. 5980-0307E (overview of VXI products)

1998 Test System and VXI Products Data Book,
Agilent Pub. No. 5966-2812E

Online

Internet access for Agilent product information, services and support
www.agilent.com/find/tmdir

VXI product information
www.agilent.com/find/vxi

Defense Electronics Applications
www.agilent.com/find/defense_ATE

Agilent Technologies VXI Channel Partners
www.agilent.com/find/vxichanpart

Agilent Technologies' HP VEE Application Website
www.agilent.com/find/vee

Agilent Technologies Data Acquisition and Control Website
www.agilent.com/find/data_acq

Agilent Technologies Instrument Driver Downloads
www.agilent.com/find/inst_drivers

Agilent Technologies Electronics Manufacturing Test Solutions
www.agilent.com/go/manufacturing

Get assistance with all your test and measurement needs at
www.agilent.com/find/assist
or check your local phone book for the Agilent office near you.

Agilent Technologies' test and measurement service/support commitment

Agilent strives to maximize the value our test and measurement products give you, while minimizing your risk and service/support problems. We work to ensure that each product is realistically described in the literature, meets its stated performance and functionality, has a clearly stated global warranty, and is supported at least five years beyond its production life. Our extensive self-help tools include many online resources (www.agilent.com).

Experienced Agilent test engineers throughout the world offer practical recommendations for product evaluation and selection. After you purchase an Agilent product, they can provide no-charge assistance with operation verification and basic measurement setups for advertised capabilities. To enhance the features, performance, and flexibility of your test and measurement products—and to help you solve application challenges—Agilent offers free or extra-cost product options and upgrades, and sell expert engineering, calibration, and other consulting services.

Phone or Fax

United States:
(tel) 1 800 829 4444

Canada:
(tel) 1 877 894 4414
(fax) (905) 282 6495

China:
(tel) 800 810 0189
(fax) 800 820 2816

Europe:
(tel) (31 20) 547 2323
(fax) (31 20) 547 2390

Japan:
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Korea:
(tel) (82 2) 2004 5004
(fax) (82 2) 2004 5115

Latin America:
(tel) (305) 269 7500
(fax) (305) 269 7599

Taiwan:
(tel) 0800 047 866
(fax) 0800 286 331

Other Asia Pacific Countries:
(tel) (65) 6375 8100
(fax) (65) 6836 0252
(e-mail) tm_asia@agilent.com

Data Subject to Change
© Agilent Technologies, Inc. 2000
Printed in the U.S.A. May 1, 2004
5965-5767E

Agilent Technologies

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP