ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Abaco Systems / VMIC VMIVME-2120-175* at our website: ***Click HERE***

VMIVME-2120
64-bit High-Voltage Digital Output with Built-in-Test

- 64 bits of high-voltage outputs
- High-current drivers (600 mA sink)
- Automatic surge current shutdown protection option
- Thermal shutdown protection option for driving incandescent or inductive loads
- High breakdown voltage (55 V)
- Output clamp diodes for inductive flyback protection
- Compatible with Intelligent I/O Controllers
- Built-in-Test logic for fault isolation
- High reliability DIN-type I/O connectors
- 8-, 16-, or 32-bit transfers
- Double Eurocard form factor
- Separate board address decoding for control and data registers
- Optional pull-up resistors for electronic switch outputs
- Optional TTL outputs
- Front panel with fail LED

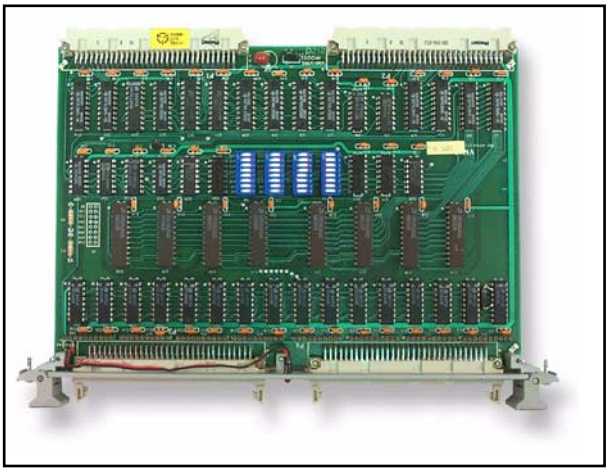

FUNCTIONAL CHARACTERISTICS

Compatibility: VMEbus specification compatible. Double height form factor.

Output Connector Type: Dual 64-pin connectors - DIN 41612

Output Organization: Eight ports, eight bits wide. Addressable to any address within short supervisory or short nonprivileged I/O map. Control and Status Register (CSR) address is independently selectable.

Address Modifier Codes: Jumper-selectable for short supervisory or short nonprivileged I/O access. Factory configured for short supervisory I/O access.

Addressing Scheme: Eight ports individually addressable on 8-, 16-, or 32-bit boundaries. The separate board address decoder for the CSR allows addresses for hardware control to be grouped for improved software efficiency.

Data Transfer Bus: A16: D8, D16, D32

Built-in-Test: This product supports off-line and real-time fault detection and isolation. The off-line mode is enabled by executing a write to the CSR to set the Test Mode Bit. All outputs are OFF with the Test Mode enabled.

Fail LED: A Fail LED is provided that is illuminated at powerup and extinguished under program control upon successful diagnostic execution.

Output Drivers: This product may be ordered with a variety of output driver options as shown in the Ordering Options. As the Ordering Options show, the board can be manufactured with (1) automatic surge current shutdown protection, (2) no shutdown protection, or (3) thermal shutdown protection for driving incandescent lamps. A detailed description is

Ordering Options

June 16, 1999 800-002120-000 H	A	B	C	–	D	E	F
VMIVME-2120 –				–			

A = Data Polarity
- 1 = Positive True
- 2 = Negative True

B = Output Type
- 0 = Logic Level (TTL Compatible), Automatic Surge Current Shutdown Protection
- 1 = High-Voltage Level (Open Collector), Automatic Surge Current Shutdown Protection (1)
- 2 = Electronic Switch Option, Automatic Surge Current Shutdown Protection
- 3 = Logic Level (TTL Compatible), No Shutdown Protection
- 4 = High-Voltage Level (Open Collector), No Shutdown Protection (1)
- 5 = Electronic Switch Option, No Shutdown Protection
- 6 = Logic Level (TTL Compatible), Thermal Shutdown Protection (2)
- 7 = High-Voltage Level (Open Collector), Thermal Shutdown Protection (1)(2)
- 8 = Electronic Switch Option, Thermal Shutdown Protection (2)

C = Pull-Up Resistors; Output Voltage Range (3)
- 0 = 270 Ω, 5 V Range (6 V Absolute Maximum)
- 1 = 1.5 K, 12 V Range (14 V Absolute Maximum)
- 2 = 6.8 K, 24 V Range (30 V Absolute Maximum)
- 3 = 27 K, 48 V Range (55 V Absolute Maximum)
- 4 = 560 Ω, 5 V Range (8 V Absolute Maximum)(4)
- 5 = No Pull-Up Resistor Installed (55 V Absolute Maximum)

Connector Data

Compatible Cable Connector	Panduit No. 120-964-435 (5)
PC Board Connector	Panduit No. 120-964-033A
Strain Relief Device	Panduit No. 100-000-072

Notes

1. No pull-up resistors installed, C option field must equal 5.
2. Required for driving incandescent lamps without external warming or current limiting resistors.
3. The absolute maximum output voltage is determined by the power dissipation of the pull-up resistor (0.12 W maximum) and by the output driver. The maximum voltage with no latch-up is 35 V. Please note the open-collector options (**output types** 1, 4, and 7) take precedence (that is, no pull-up resistor is installed for those types regardless of **output voltage** range selected).
4. TTL-compatible option, used with output type *Logic Level* 0, 3, and 6.
5. Panduit is also known as ITW/Pancon.

For Ordering Information, Call:
1-800-322-3616 or 1-256-880-0444 • FAX (256) 882-0859
E-mail: info@vmic.com Web Address: www.vmic.com
Copyright © January 1986 by VMIC
Specifications subject to change without notice.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

provided on page 6 for options (1) and (2). The thermal shutdown protection for driving incandescent lamps (3) is described on page 6.

Output Features: The high-current driver (600 mA sink) outputs are designed to drive incandescent lamps and inductive loads without external current limiting or warming resistors. Due to cold filament inrush currents, it is recommended that only one lamp be driven by the output driver. However, if more than one bulb must be driven by a single wire, then another driver must be connected in parallel. If more than one bulb must be driven by a single output, it is recommended the VMIVME-2131 (current source/sink) or the VMIVME-2130 (current source only) be used if the application will allow. The output drivers of the VMIVME-2131 and VMIVME-2130 will not necessarily support all of the VMIVME-2120 current sink (open collector) applications. In addition to this, the VMIVME-2120 and VMIVME-213x have dissimilar power requirements.

PHYSICAL/ENVIRONMENTAL

Temperature: 0 to 55 °C, operating
-20 to +85 °C, storage

Humidity: 20 to 80 percent relative, noncondensing

Cooling: Forced air convection

Dimensions: Double Eurocard 160 mm x 233.35 mm

Power Requirements: +5 V at 3.786 A (maximum)
1.8 A (typical)
1.8 A typical at 5 VDC
3.786 A maximum

MTBF: 96,611 hours (217E)

APPLICATIONS —

Relay drivers	High-current, high-voltage drivers
Triac drivers	Hammer drivers
Lamp drivers	Fiber optics LED drivers
LED drivers	Stepping motor drivers
Solenoid drivers	

POSITIVE/NEGATIVE TRUE ORDERING INFORMATION — This board may be ordered with positive or negative true I/O options. The data conversion (inversion) is determined by the selection of data latches which control the output driver transistors.

A positive true output option causes a VMEbus logical *one* to turn the corresponding output transistor ON, which supplies the user with *zero* volts.

The negative true output option causes a VMEbus logical *one* to turn the corresponding output transistor OFF, which supplies the user with an open circuit for open-collector output circuits or with a high for electronic switch type output circuits.

Boards manufactured with the negative true TTL option are designed such that a VMEbus logical *one* causes the output driver to produce a logic *one* (high) to the user.

Conversely, the positive true TTL option is designed such that a VMEbus logical *one* causes the output driver to produce a logic *zero* (low) to the user.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


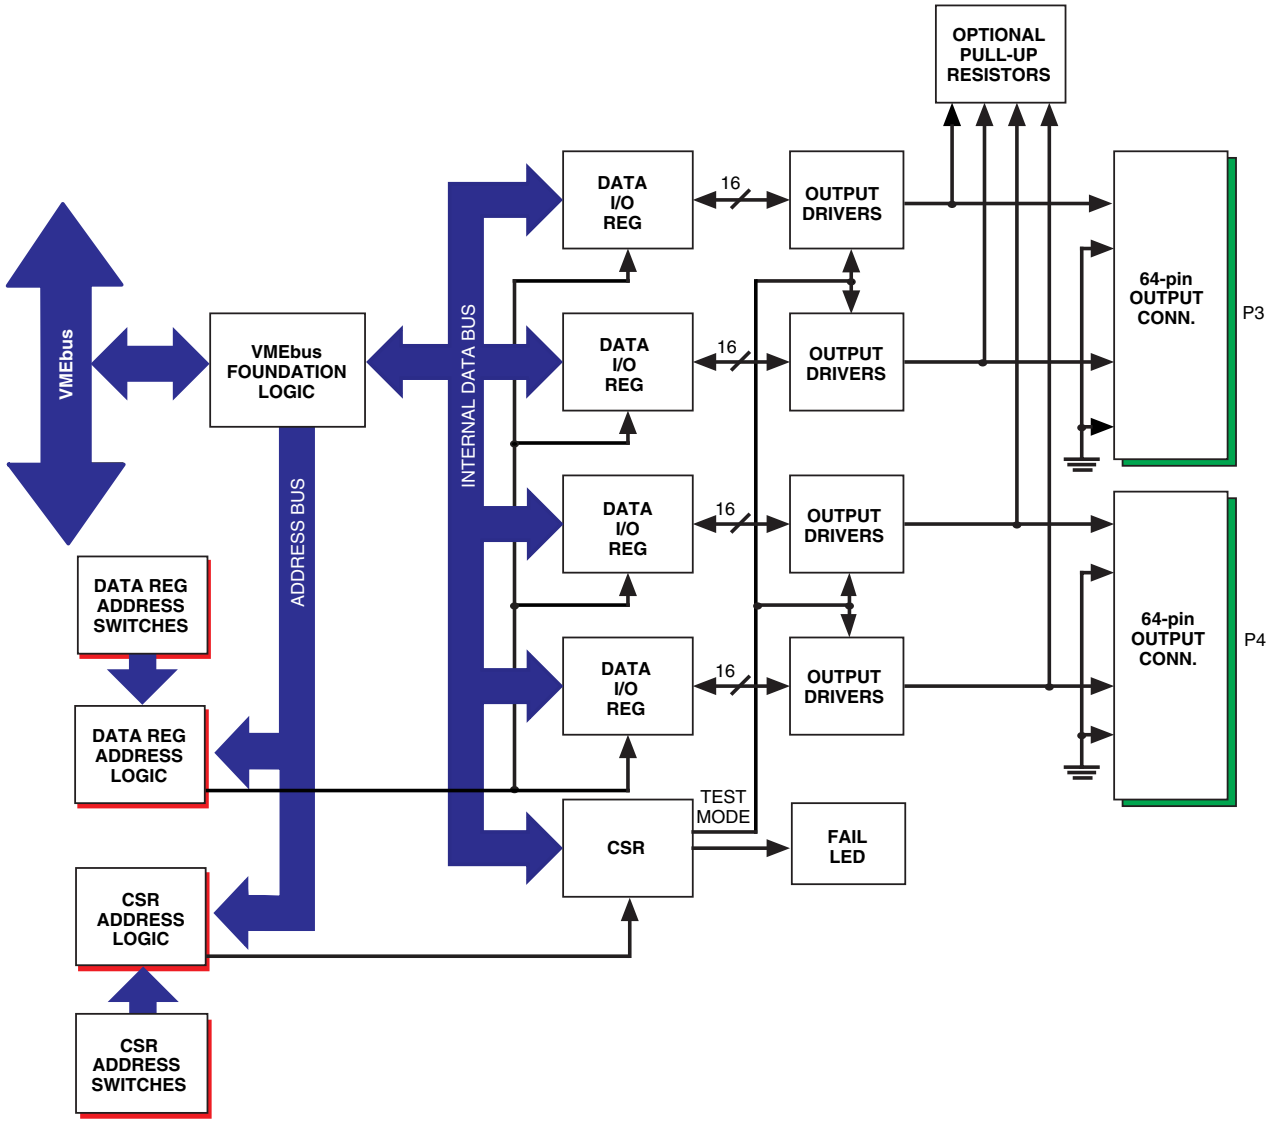


Figure 1. VMIVME-2120 Functional Block Diagram

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

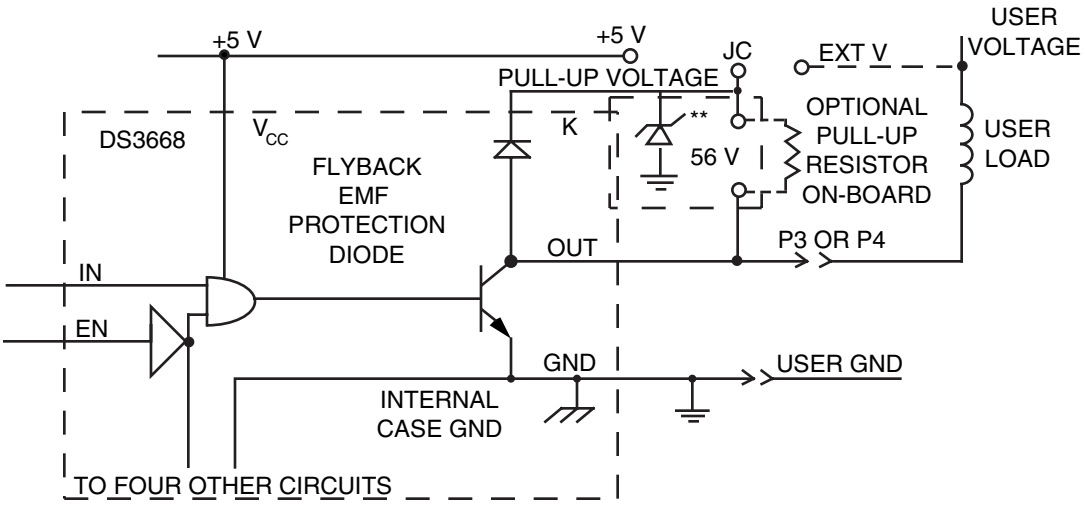

GENERAL DESCRIPTION — The DS3668* quad-peripheral driver is designed for those applications (output options 0 through 2) where low operating power, high breakdown voltage, high output current, and low output ON voltage are required. Unlike most peripheral drivers, a unique fault protection is incorporated on each output. When the load current exceeds 1.0 A (approximately) on any output for more than a built-in delay time, nominally 25 ms, that output will be shut off by its protection circuitry with no effect on other outputs. This condition will prevail until that protection circuitry is reset by toggling the corresponding input or the enable pin low for at least 0.5 ms. The 25 ms built-in delay is provided to ensure the protection circuitry is not triggered by turn-on surge currents associated with certain kinds of loads.

The outputs are capable of sinking 600 mA each and offer a 55 V breakdown. However, for inductive loads, the output should be clamped to 35 V or less to avoid latch-up during turn-off (inductive flyback protection). An on-chip clamp diode capable of handling 800 mA is provided at each output for this purpose. In addition, the driver incorporates circuitry that guarantees glitch-free power up or down operation and a fail-safe feature which puts the output in high impedance state when the input is open.


FEATURES —

Output fault protection
High impedance TTL-compatible input
High output current -600 mA per output
No output latch-up at 35 V
Low output ON voltage (550 mV typical at 600 mA)
High breakdown voltage (55 V)
Open-collector outputs
Output clamp diodes for inductive flyback protection
NPN inputs for minimal input currents (1 mA typical)
Low operating power
Standard 5 V power supply
Power up/down protection
Fail-safe operation
2 W power package
Pin-for-pin compatible with SN75437

* A DS3658 quad driver is also available. This device does not support the output fault protection described above. This is used with output options 3 through 5.

** The Zener diode is supported on assembled board no. 332-002120-000-K and later. For support on assembled board no. 332-002120-000-J and earlier, refer to Note 3 of Document No. 132-002120-000 (Assembly Drawing).

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

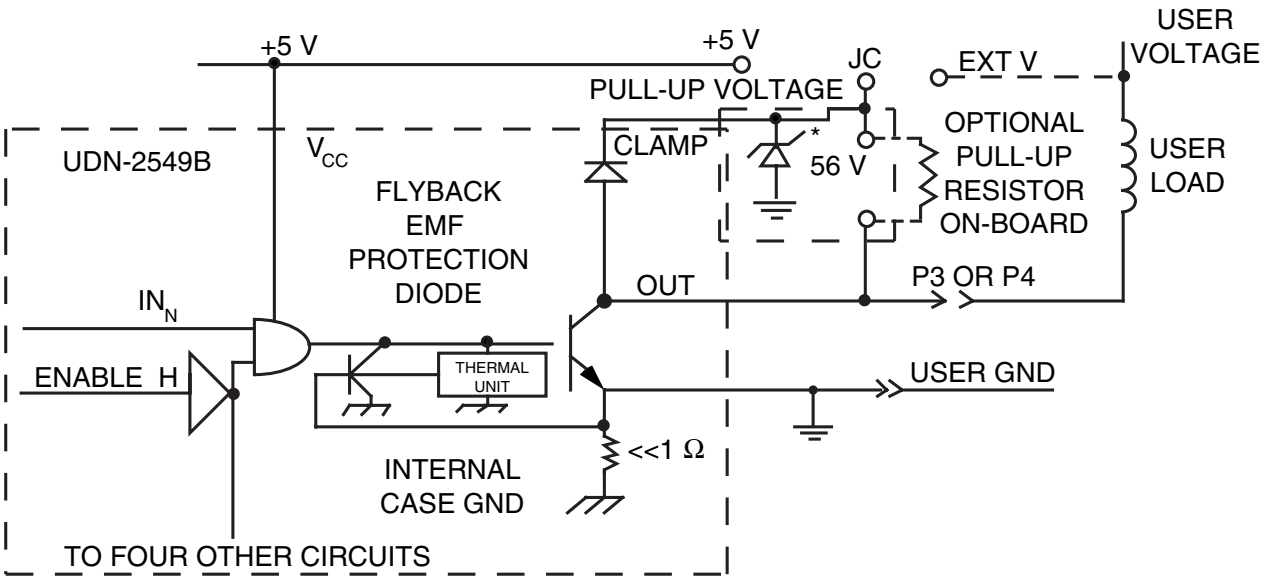

INCANDESCENT LAMP DRIVER — High incandescent lamp turn-on/inrush current can destroy semiconductor lamp drivers and contributes to poor lamp reliability. However, lamps with steady-state current ratings up to 600 mA can be driven with the UDN-2549B without the need for warming or current limiting resistors (not recommended).

When an incandescent lamp is initially turned ON, the cold lamp filament is at minimum resistance and would normally allow a 10 x to 12 x inrush current. With the UDN-2549B, during turn-on, the high inrush current is sensed by the internal low-value sense resistor, drive current to the output stage is diverted by the shunting transistor, and the load current is sensed by the internal low-value sense resistor, drive current to the output stage is diverted by the shunting transistor, and the load current is limited to approximately 1 A. During this short transition period, the output driver is driven in a linear fashion. During lamp warmup, the filament resistance increases to its maximum value, the output driver goes into saturation and applies full supply voltage to the lamp.

INDUCTIVE LOAD DRIVER — Bifilar (unipolar) stepper motors can be driven directly. The internal flyback diodes prevent damage to the output transistors by suppressing the high-voltage spikes which occur when turning OFF an inductive load.

FAULT CONDITIONS — In the event of a shorted load, shorted winding, or stalled motor, the load current will attempt to increase. As described above, the drive current to the output stage is diverted (limiting the load current to about 1 A), causing the output stage to go linear. As the junction temperature of the output stage increases, the thermal limit circuit will become operational, further decreasing the drive current. The load current (junction temperature) is then a function of ambient temperature, state of remaining drivers, supply voltage, and load resistance. If the fault condition is corrected, the output driver will return to its normal saturated condition.

TRADEMARKS

The VMIC logo is a registered trademark of VMIC. Windows NT is a registered trademark of Microsoft Corporation. Other registered trademarks are the property of their respective owners.

* The Zener diode is supported on assembled board no. 332-002120-000-K and later. For support on assembled board no. 332-002120-000-J and earlier, refer to Note 3 of Document No. 132-002120-000 (Assembly Drawing).

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

1. Electronic Switch Option (Open-Collector with Pull-Up Resistor)

Output Voltage	RP Min	IOH Max	IOH	IOL Max	Absolute Max Output Voltage
5 V	270 Ω	18.5 mA	9.3 mA at Vout = 2.5 V	600 mA	6 V
12 V	1.5 kΩ	8.0 mA	4.0 mA at Vout = 6 V	600 mA	14 V
24 V	6.8 kΩ	3.5 mA	1.8 mA at Vout = 12 V	600 mA	30 V
48 V	27 kΩ	1.8 mA	0.9 mA at Vout = 24 V	600 mA	55 V

External Power Supply Requirements

VOEXT MAX Current at RP = MIN

VOEXT	Supply Max	Absolute Max VOEXT
5	1.25 A	6 V
12	.55 A	14 V
24	0.25 A	30 V
48	0.13 A	55 V

2. TTL Option (Open-Collector with Pull-Up Resistor)

Parameter	Conditions	Min	Max	Unit
VOH	IOH = 400 µA	4.7 V	—	V
VOL	IOH = 4.1 mA	2.7 V	—	V
	IOH = 300 mA			0.7 V

3. Open-Collector Option (No Pull-Up Resistors Installed)

IOL	VOL Typ	VOL Max
300 mA	0.20 V	0.7 V
600 mA	0.55 V	1.5 V

APPLICATION AND CONFIGURATION GUIDES — The following Application and Configuration Guides are available from VMIC to assist the user in the selection, specification, and implementation of systems based on VMIC's products.

Title	Document No.
Digital Input Board Application Guide	825-000000-000
Change-of-State Product Line Application Guide	825-000000-002
Digital I/O Products (with Built-in-Test) Product Line Description	825-000000-003
Synchro/Resolver (Built-in-Test) Subsystem Configuration Guide	825-000000-004
Analog I/O Products (with Built-in-Test) Configuration Guide	825-000000-005
Connector and I/O Cable Application Guide	825-000000-006
Integration of the VMIVME-5588 with GE Fanuc PLC	825-000025-000
VxWorks Real-Time Kernel	825-000026-000
RTX Real-Time Subsystem for Windows NT®	825-000027-000
Data Acquisition Noise Reduction Application Guide	825-000000-026
IOWorks Base Package Application Guide	825-000000-027
IOWorks Systems Application Guide	825-000000-028

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP