ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction


All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Abaco Systems / VMIC VMIVME-2536-200* at our website: ***Click HERE***

VMIVME-2536

32-Channel Optically Coupled Digital I/O Board with Built-in-Test

- ***32 optically coupled outputs***
- ***32 optically coupled inputs***
- ***High isolation potential***
  - ***1 kV sustained***
  - ***3.5 kV pulsed***
- ***8-, 16-, 32-bit data transfers***
- ***Standard data or short I/O addressing A16 or A24***
- ***Voltage sensing or contact sensing inputs***
- ***Input ranges of 5 to 125 VDC***
- ***300 mA current sinking outputs***
- ***50 V maximum output voltage***
- ***Supports Built-in-Test for both inputs and outputs***

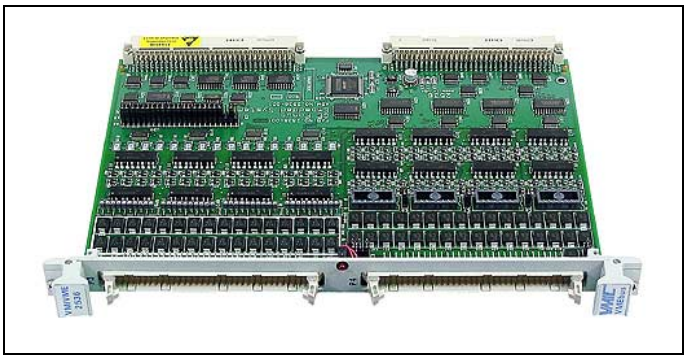

Functional Characteristics

Board Function: This board has 32 optically coupled inputs and 32 optically coupled outputs. Both the outputs and inputs have Built-in-Test capability and provide a sustained 1 kV of system isolation to the VMEbus backplane.

Compliance: This board complies with the VMEbus specification ANSI/IEEE STD 1014-1987 IEC 821 and 297 with the following mnemonics:
A24/A16, D32/D16/D08(EO)
Slave with the following Address Modifiers:
3D,39/2D,29.

Built-in-Test: The VMIVME-2536 supports both online and offline Built-in-Test (BIT).

Inputs are put into the test mode by setting a bit in the Control and Status Register (CSR). While in the test mode, data placed in onboard test registers are read through the input ports instead of field data. The test registers are at the same address as the input data ports, allowing testing to be achieved by simply writing to and reading from the input data ports. This feature is used for both online and offline testing.

The contents of the Output Data Registers may be read at anytime, thereby supporting online testing. The outputs may be put into offline test mode by setting a bit in the CSR. In the offline test mode, the open-collector outputs are all disabled. Data patterns may then be written to and read from the Output Registers for test purposes without affecting the outputs.

On powerup or reset, the board is placed in the test mode. Output Data Registers should be initialized prior to being put online to avoid undetermined states.

Ordering Options							
August 27, 2004 800-002536-000 E		A	B	C	D	E	F
VMIVME-2536	–		0	0	0	0	0

A = Input Voltage Range
0 = 5 V
1 = 12 V
2 = 24 to 28 V
3 = 48 V
4 = 125 V (Voltage Sensing Only)
B through F = 0 (Options reserved for future use)

Connector Data	
Compatible Cable Connector	Panduit No. 120-964-435
Strain Relief	Panduit No. 100-000-072
PC Board Header Connector	Panduit No. 120-964-033A

Note

Panduit is also known as ITW/Pancon.

For Ordering Information, Call:
1-800-322-3616 or 1-256-880-0444 • FAX (256) 882-0859
Email: info.embeddedsystems@gefanuc.com
Web Address: www.gefanuc.com/embedded
Copyright © 2004 by VMIC
Specifications subject to change without notice.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Addressing Scheme: The board is organized in 8-bit ports. Four input ports and four output ports, stacked one longword boundary above Board ID and CS Registers. A total of 16 bytes of address space is occupied.

Address Map:

Relative Address	Register Name
$00	BD ID (Board ID)
$02	Control and Status (CSR)
$04	Input Data Register 0
$05	Input Data Register 1
$06	Input Data Register 2
$07	Input Data Register 3
$08	Output Data Register 0
$09	Output Data Register 1
$0A	Output Data Register 2
$0B	Output Data Register 3
$0C	Reserved
$0D	Reserved
$0E	Reserved
$0F	Reserved

Input Characteristics

Input Configuration: The inputs can be voltage sensing or contact sensing. Voltage sensing or contact sensing may be set on byte boundaries. For contact sensing, a user-supplied SIP resistor must be installed. External voltage or internal VMEbus +5 V may be jumper-selected on byte boundaries to supply power for contact sensing mode. Note the VMEbus +5 V is useful only with the 5 V input option.

Input Voltage Options: The input voltage range is a manufacturing option. The available ranges are 5, 12, 24, 28, 48, and 125 V. See Tables 1 through 5 for more detailed information and please refer to the Ordering Options.

Input Isolation: 10 MΩ, minimum

Isolation Voltage(1): 1,000 V sustained;
3,500 V for one second field to VMEbus.
500 V sustained channel-to-channel maximum.

Contact Debounce: User-programmable debounce is available. Debounce times are 0, .256, .512, 1.024, 2.048, 4.096, 8.192, and 16.384 ms. Debounce defaults to 0 on reset.

Output Characteristics

Output Configuration: The outputs are optically isolated with open collector. The user may install a pull-up resistor on byte boundaries. External voltage or internal VMEbus +5 V may be jumper-selected on byte boundaries to supply power for pull-up resistors.

Output Leakage Current:

500 µA maximum at V_{CE} = 50 V and T_A = 60 °C

Output Voltage: 50 V maximum

Switching Time: See Table 6

Output Isolation: 10 MΩ, minimum

Isolation Voltage[1]: 1,000 V sustained
3,500 V for one second field to VMEbus.
500 V sustained channel-to-channel maximum.

Physical/Environmental Specifications

Dimensions: 6U single slot Eurocard form factor

Height	9.2 in. (233.4 mm)
Depth	6.3 in. (160 mm)
Thickness	0.8 in. (20.3 mm)

User Connectors: Two 64-pin DIN connectors (one for the inputs and one for the outputs).

Ambient Temperature: 0 to 60 °C, operating
-55 to +85 °C, storage

Humidity: 20% to 80%, noncondensing

Power Requirements: +5 VDC at 2.65 A

MTBF: 463,909 hours*

* MTBF calculated using industry standard algorithm, 1 / (Σ FIT * 1.0 x 10^{-9}). Wherever possible using component FIT values directly from the respective manufacturers own reliability test programs, not from estimates or known reliability databases.

Trademarks

All registered trademarks are the property of their respective owners.

1. User-supplied resistors may limit isolation.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

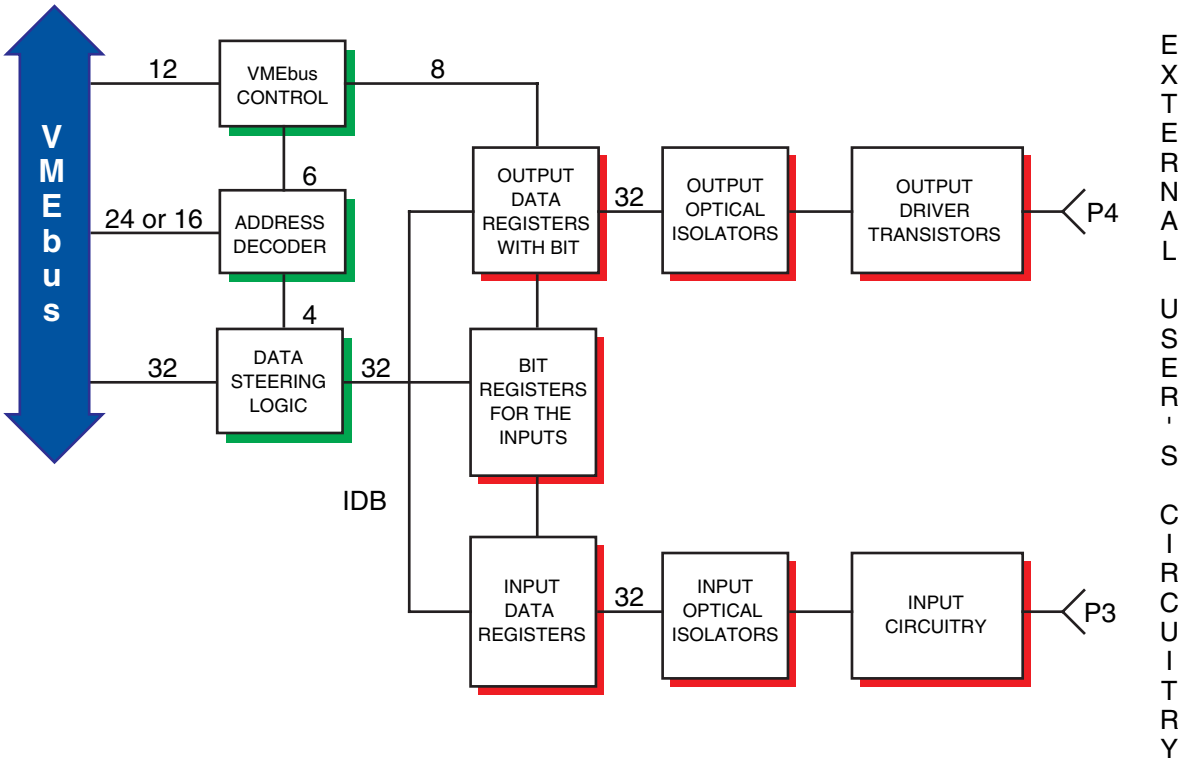


Figure 1. VMIVME-2536 Functional Block Diagram

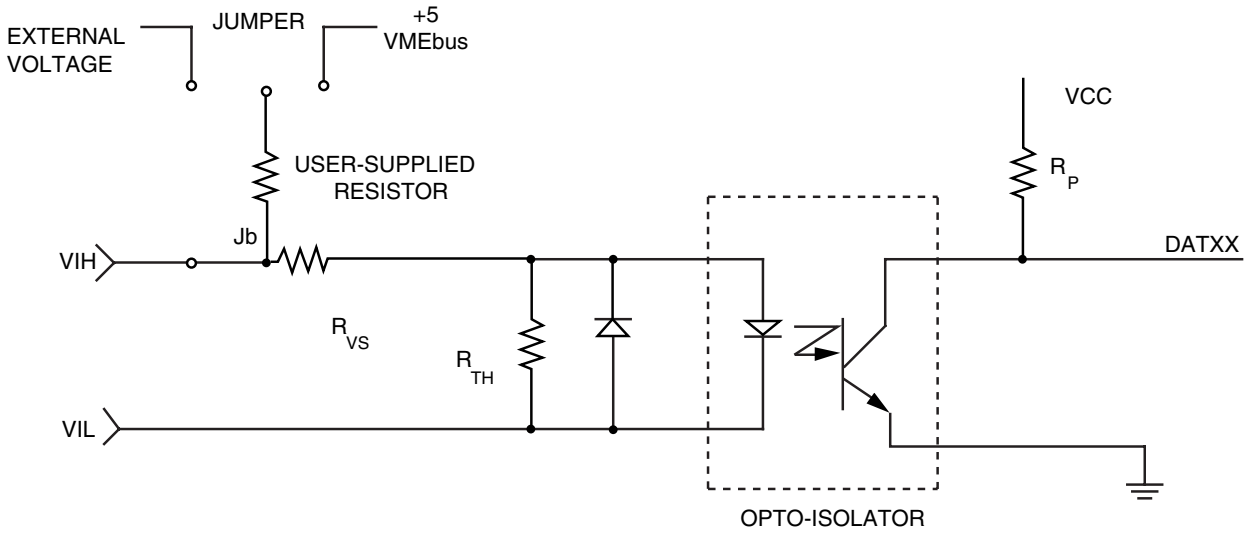


Figure 2. User Input Connection Circuit

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

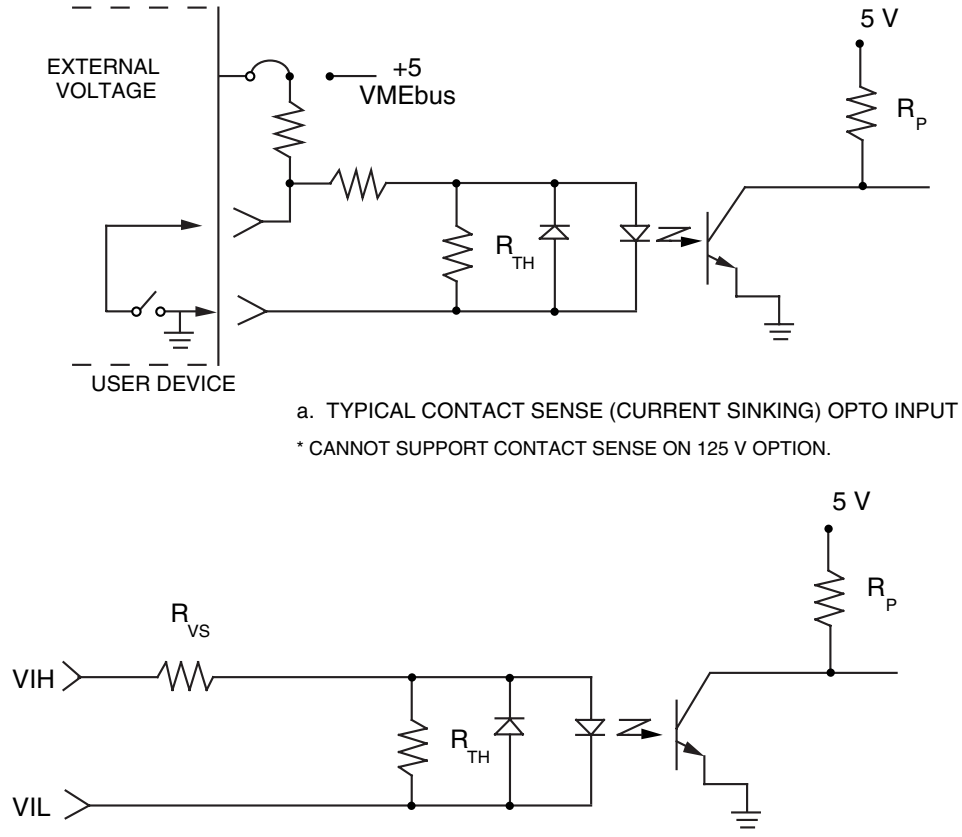


Figure 3. Typical VMIVME-2536 OPTO Input Configurations (5 to 125 V Inputs)

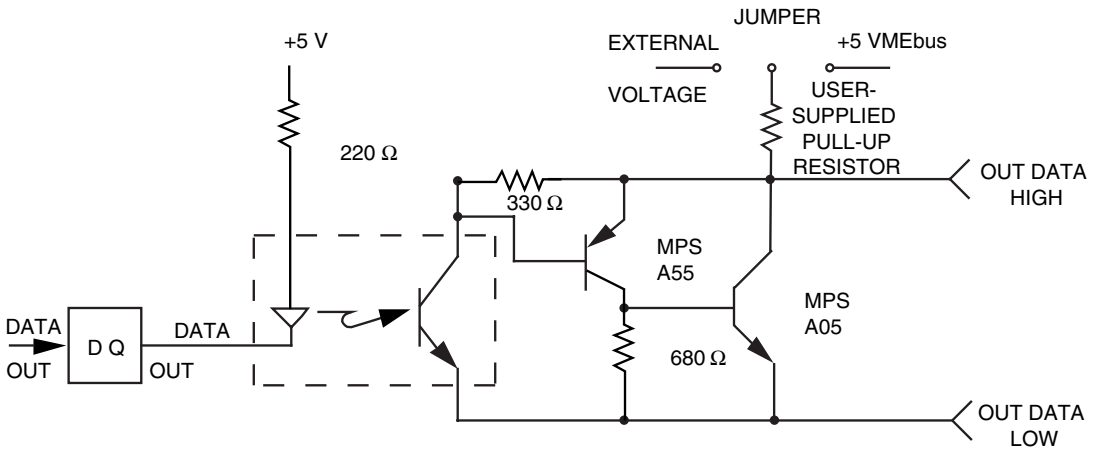


Figure 4. Typical Output Configuration

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Table 1. 5 V Input Option

PARAMETER	CONDITION	MIN	TYP	MAX	UNITS
V_{INH} – High Threshold Voltage		3.6	2.6		V
V_{INL} – Low Threshold Voltage			2.6	1.8	V
I_{INH} – High Threshold Current	V_{IN} = 5 VDC			3.5	mA
I_{INL} – Low Threshold Current	V_{IN} = V $_{INL}^{(MIN)}$			0.7	mA

Table 2. 12 V Input Option

PARAMETER	CONDITION	MIN	TYP	MAX	UNITS
V_{INH} – High Threshold Voltage		9.2	5.9		V
V_{INL} – Low Threshold Voltage			5.9	3.4	V
I_{INH} – High Threshold Current	V_{IN} = 12 VDC			2.8	mA
I_{INL} – Low Threshold Current	V_{IN} = V $_{INL}^{(MIN)}$			0.7	mA

Table 3. 24 to 28 V Input Option

PARAMETER	CONDITION	MIN	TYP	MAX	UNITS
V_{INH} – High Threshold Voltage		21.3	12.9		V
V_{INL} – Low Threshold Voltage			12.9	6.9	V
I_{INH} – High Threshold Current	V_{IN} = 24 VDC			2.8	mA
I_{INL} – Low Threshold Current	V_{IN} = V $_{INL}^{(MIN)}$			0.7	mA

Table 4. 48 V Input Option

PARAMETER	CONDITION	MIN	TYP	MAX	UNITS
V_{INH} – High Threshold Voltage		43.2	27.0		V
V_{INL} – Low Threshold Voltage			27.0	13.9	V
I_{INH} – High Threshold Current	V_{IN} = 48 VDC			2.2	mA
I_{INL} – Low Threshold Current	V_{IN} = V $_{INL}^{(MIN)}$			0.7	mA

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Table 5. 125 V Input Option

PARAMETER	CONDITION	MIN	TYP	MAX	UNITS
V_{INH} – High Threshold Voltage		105.1	75.2		V
V_{INL} – Low Threshold Voltage			75.2	48.2	V
I_{INH} – High Threshold Current	V_{IN} = 125 VDC			2.2	mA
I_{INL} – Low Threshold Current	V_{IN} = V $_{INL}^{(MIN)}$			0.7	mA

Table 6. Output Characteristics

PARAMETER	CONDITION	MIN	TYP	MAX	UNITS
V_{CE}				50	V
V_{CE} (SAT)	I_{CE}= 300 mA			1.2	V
I_{CE}				300	mA
I_{CEO}	V_{CE}= 50 V T_A= 60 °C			500	µA
T_D ON			7.0		µs
T_D OFF				35	µs

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP