ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Abaco Systems / VMIC VMIVME-4140-000* at our website: ***Click HERE***

GE Fanuc Automation

VMIVME-4140 Specifications

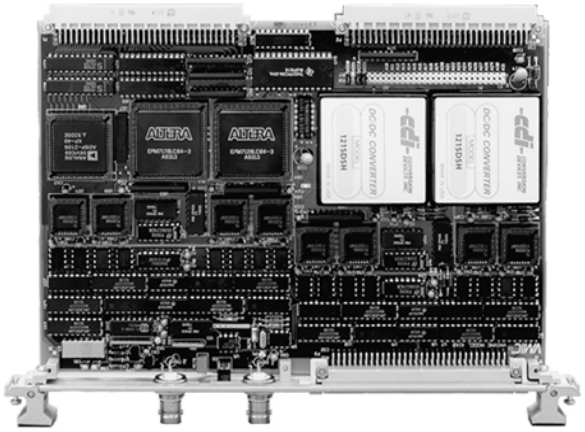

32-Channel 12-bit Analog Output Board

Features:

- 32 analog output channels
  - 10mA maximum output current per channel
  - One 12-bit D/A converter (DAC) per output channel
- 0.8Ω output impedance
- Random update (nonscanning)
- Software or external synchronous update of double-buffered outputs
- Single reference potentiometer – no other manual calibration required
- Automatic calibration initiated by reset or by software command
- Unipolar (0 to +10V, 0 to +5V, 0 to +2.5V) or bipolar (±2.5, ±5 and ±10V) software selectable
- Discrete wire or mass-terminated cables
- Self-test
  - Extensive onboard diagnostic testing capability
  - Outputs can be disconnected from the field for offline
  - PMC expansion slots
  - self-testing
- Front panel status LED
- Front panel analog output connector
- Front panel reference voltage access
- Applications
  - Data acquisition systems
  - Control systems
  - Precision analog stimulus
  - Automatic test equipment (ATE)

GE FANUC

Embedded Systems

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Ordering Options							
July 17, 2006 800-004140-000 C		A	B	C	D	E	F
VMIVME-4140	–	0			0	0	

A = 0 (Option reserved for future use.)
B = Output Connector Type
0 = Discrete Wire
1 = IDC (Mass-Terminal)
C = Number of Channels
0 = 32 Channels
1 = 16 Channels
D = 0 (Option reserved for future use)
E = 0 (Option reserved for future use)
F = Conformal Coating
0 = Standard VME front panel without conformal coating
1 = Reserved
2 = Standard VME front panel with conformal coating

IDC Output Connector Data	
Mating Cable Connector	Panduit No. 120-964-435
Strain Relief	Panduit No. 100-000-072
PC Board I/O Connector	Panduit No. 120-964-033A

Discrete Wire Output Connector Data	
Mating Connector	AMP No. 925486-1
Female Crimp Contacts*	AMP No. 530151-6
Connector Shell Housing	Harting No. 09 03 096 0501
PC Board Connector	Panduit No. 120-964-033A

*An AMP crimp tool part number is 90301-2.

Front Panel Reference Voltage and Front Panel External Sync Connector Data	
Front Panel Connector	AMP No. 22726-3

Note

Panduit is also known as ITW/Pancon.

For Ordering Information, Call:
1-800-322-3616 or 1-256-880-0444 • FAX (256) 882-0859
Email: info.embeddedsystems@gefanuc.com
Web Address: www.gefanuc.com/embedded

Copyright © 2006 by GE Fanuc Embedded Systems
Specifications subject to change without notice.

Functional Characteristics

Introduction: The VMIVME-4140 Analog Output Board provides 32 high quality analog output channels with 12-bit resolution, and can source or sink 10 mA at ±10 V. Each output has a dedicated D/A Converter (DAC) assigned to it. The analog outputs can be disconnected from the field wiring for offline testing. Calibration and self-test are initiated by a VMEbus system reset or by execution of a software command. During calibration, a table of offset and gain coefficients is compiled and stored in RAM. There is an entry for offset and gain corresponding to each of the 32 channels configured in each of the six output voltage ranges.

Self-Test: Self-Test is run automatically after system reset. The Self-Test Register indicates success or failure and can indicate the channel which has failed.

Front Panel Status LED: The LED is illuminated after a system reset. The LED is extinguished on the successful completion of self-test and autocalibration. The LED can also be turned ON and OFF under software control.

Front Panel Reference Voltage Access: An isolated BNC connector on the front panel allows access to the internal reference voltage. Front panel access to the corresponding reference voltage adjustment is provided.

Calibration: When autocalibration is initiated, either by a system reset or software command, an embedded DSP loads calibration output values into each of the output DACs which are read back into the DSP through a 16-bit ADC. This is repeated until a sufficient number of calibration points have been measured. A calibration table consisting of offset and gain corrections for each of the 32 outputs in each of the six voltage ranges is compiled and stored in RAM. These correction factors are recalled each time an output is changed.

System Reset: After a system reset, all outputs are in the offline mode, all Control Registers are in their default state, self-test is initiated, and autocalibration is initiated.

VMEbus Compliance: This board complies with the VMEbus specification (ANSI/IEEE STD 1014-1987 IEC 821 and 297) with the following mnemonics:

Addressing Mode	Responding Address Modifiers
A32	$09 (Extended nonprivileged data access) or $0D (Extended supervisory data access)
A24	$39 (Standard nonprivileged data access) or $3D (Standard supervisory data access)
A16	$29 (Short nonprivileged I/O access) or $2D (Short supervisory I/O access)
Data Accesses:	D16, D08(EO)


Board Address: The base VMEbus address is set by configuration of a jumper field. A jumper exists for each of the addresses A31 through A7; the address space occupied by this board is 128 consecutive bytes.

VMEbus Compliance: Address modifier bits are jumper selected and decoded to support nonprivileged, supervisory, and either nonprivileged or supervisory board accesses.

Output Data Transfer: Output data is stored in 32 16-bit registers. The board can be software configured to accept either two's complement or offset binary data. Output change may be initiated by register access, however, outputs are double buffered which allows all channels to be synchronously updated by either a software or external trigger.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Address Map:

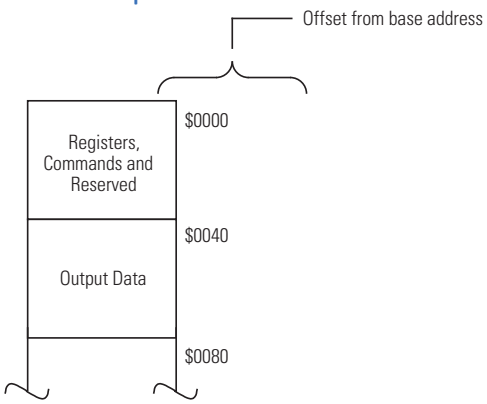

Electrical Characteristics

(At +25° C and rated power supplies unless otherwise noted.)

Outputs: Thirty-two or sixteen single-ended; one DAC per channel

Full-Scale Output: ±10 V, ±5 V, ±2.5 V, 0 to +2.5 V, 0 to +5 V, 0 to +10 V (software selectable)

Output Code: Each 12-bit DAC accepts digital codes in offset binary or two's complement (software selectable)

Resolution: 12 bits

Output Impedance: < 0.8Ω, online
> 10Ω, offline

Output Current: ±10mA, over the entire output voltage range

Output Short Circuit Protection: Indefinite short-to-common; transient overvoltage protected to ±25V (for one second)

Transfer Characteristics

$$E_{OUT} = E_{OUTMIN} + (\frac{N_{DATA}}{4{,}096} \times E_{SPAN})$$

Where:
E_{OUT} = Channel output voltage
E_{OUTMIN} = Negative end of range
N_{DATA} = Channel data from VMEbus
E_{SPAN} = Positive end of range minus negative end of range
Example: for the ±5 V range:

$$E_{OUT} = -5V + (\frac{N_{DATA}}{4{,}096} \times 10V)$$

Note: Initial accuracy is established when the board is channel-calibrated directly after reference calibration.

Differential Nonlinearity: 0.030 percent SPAN, maximum. Monotonic over the operating temperature range.

Integral Nonlinearity: 0.030 percent SPAN, maximum (referenced to best fit straight line)

Accuracy, Initial : Maximum error at +25°C:
±0.03 percent setting ±0.025 percent SPAN ±1.5mV
Gain Error Offset Error
Example: for a setting of +2.000V on the ±5V range:
Max Error = (±0.03% x 2.000V) ± (0.025% x 10V) ±1.5
= ±0.6mV ± 2.5mV ± 1.5
= ±4.6mV

Note: Initial accuracy is established when the board is channel-calibrated directly after reference calibration.

Accuracy Stability

Temperature Effect: ±35 ppm setting ±25 ppm SPAN ±30µV, maximum drift per °C

Long Term: ±45 ppm setting ±30 ppm SPAN ±50µV, maximum drift per 1,000 hr

Interchannel Crosstalk Rejection: 70 dB minimum, DC - 1 kHz

Output Noise :
4mV p-p maximum at 3σ (10 Hz to 10 kHz)
30mV p-p maximum at 3σ (10 Hz to 20 MHz)

Note: Output noise is specified at 3σ standard deviations, which includes 99.7 percent of all noise peaks for a normal distribution. Glitch (transition) and BIT-switching noise is not included.

Transition Impulse: 5µV-s, maximum spike during data transition

BIT Switch Impulse: 1µV-s, maximum spike during channel change

Settling Time (0.01 Percent):
18µs, step = 100 percent SPAN
12µs, step = 50 percent SPAN

Access Time

Write Access Time: 500ns maximum at data transfer rates less than 200 kHz

Maximum Sustainable VMEbus Data Transfer Rate: 200 kHz, minimum

Note: Access time is specified as the delay from active Data Strobes to DTACK.

Physical/Environmental Specifications

External Trigger :

Polarity	Programmable
Level	TTL, VIH = 2.0V; VIL = 0.8V
Pulse Width	1µs, minimum

Note: May be accessed from a front panel BNC connector or from the VMEbus P2 connector.

Dimensions: 6U single slot Eurocard form factor

Height	9.2 in. (233.4mm)
Depth	6.3 in. (160mm)
Thickness	0.8 in. (20.3mm)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Weight (Mass): 0.7 kgm maximum

Temperature:
0 to +65° C, operating
-25 to +85° C, storage

Relative Humidity:
20% to 80%, noncondensing

Cooling: Normal VMEbus chassis forced air circulation

Power Requirements: +5VDC at 4.0A maximum; outputs fully loaded

Altitude: Operation to 3,000m

MTBF: 107,400 hours (217F)

Trademarks

All registered trademarks are the property of their respective owners.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

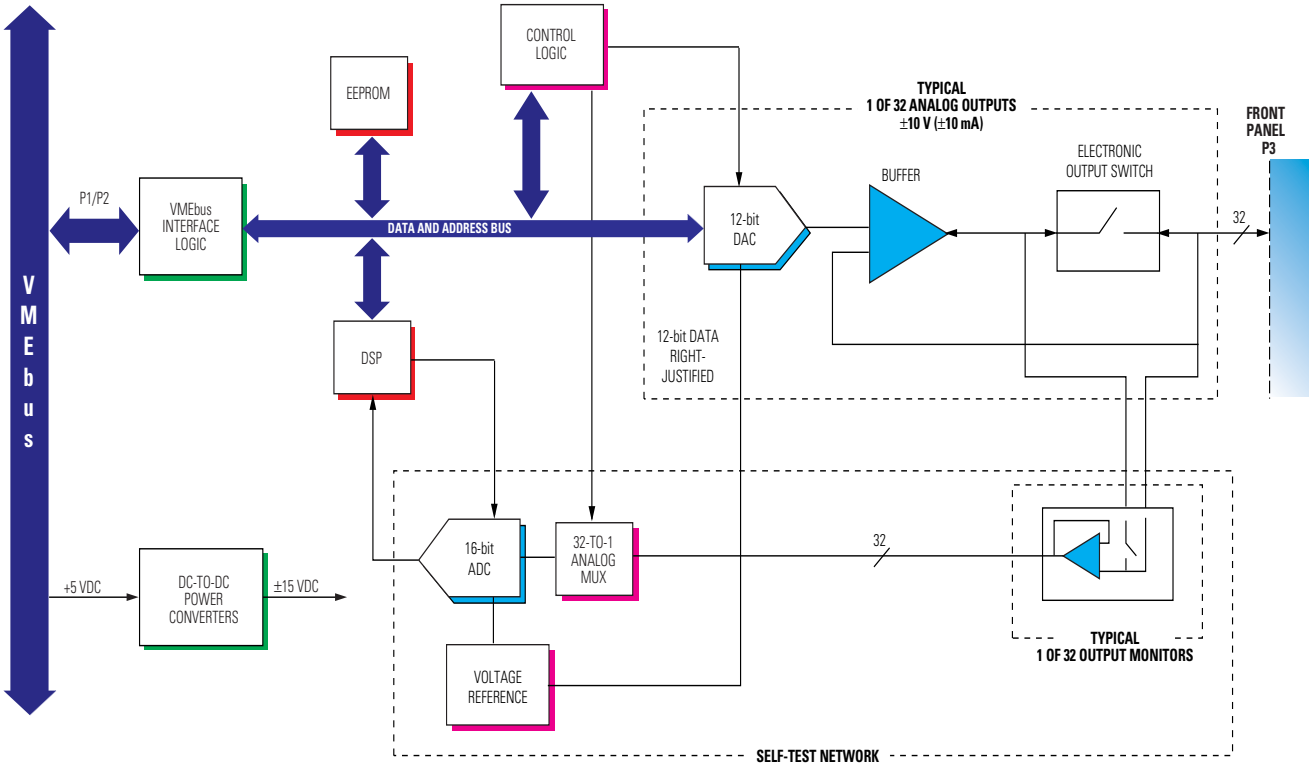


Figure 1. VMIVME-4140 Functional Block Diagram

GE Fanuc Embedded Systems Information Centers

Americas:
Huntsville, AL 1 800 322-3616
1 (256) 880-0444
Camarillo, CA 1 (805) 987-9300
Greenville, SC 1 (864) 627-8800
Richardson, TX 1 (972) 671-1972

Europe, Middle East and Africa:
Edinburgh, UK 44 (131) 561-3520
Paris, France 33 (1) 4324 6007

Additional Resources

For more information, please visit the GE Fanuc Embedded Systems web site at:
www.gefanuc.com/embedded

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP