ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Keysight / Agilent E1538A* at our website: *Click HERE*

Agilent E1538A
Enhanced Frequency/Totalize/ PWM SCP
Data Sheet

- **8-channel, non-isolated, variable input level**
- **Frequency counter input to 100 kHz**
- **Totalize to >16 million counts**
- **PWM output — square wave or variable pulse width**
- **Pulse width measurement**
- **Quadrature count and stepper motor control**

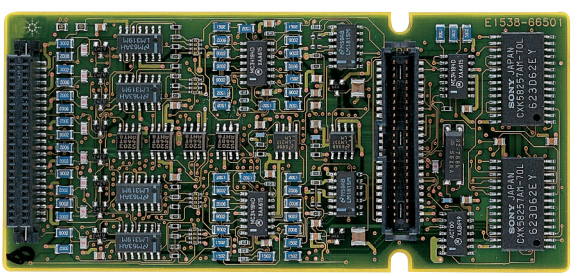

Agilent E1538A

Description

The Agilent E1538A Enhanced Frequency/Totalize/PWM SCP has eight channels. Each of the eight channels can be individually configured to perform input or output functions. Input functions include frequency measurement and totalize, pulse width measurement, rpm, and quadrature count. Output functions can free run or can be triggered. Output functions include square waves, pulse trains, angular position pulse, and stepper motor control.

Any channel can be configured as a one-bit variable level digital input or output. Additionally, two channels may be configured for low-level sensors.

Use the E1538A with the following VXI modules:

Model	Description
E1415A	Algorithmic Closed Loop Controller
E1419A	Multifunction Measurement and Control Module

Refer to the Agilent Technologies Website for recent product updates, if applicable.

Wide Range of Input/Output Functionality

The E1538A channels can be individually configured to either an input or an output function.

Input functions include:

- static digital state
- frequency measurement
- totalize positive or negative digital transitions
- pulse width measurement
- rotational velocity (senses added or missing cogwheel teeth)
- quadrature count (two channels required)

Output functions include:

- static digital state
- single pulse per trigger
- pulse width modulation
- frequency modulation
- rotationally position pulse
- stepper motor control

The logical sense of input and output channels can be configured as inverted or normal.

Input channels have individual threshold levels up to ± 48 V.

Output channels can be configured as either open drain or passive pull-up.

Agilent Technologies
Innovating the HP Way

Artisan Scientific - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisan-scientific.com

Input Functions

Digital Input: Each channel has a programmable threshold comparator. The digital input threshold can be programmatically set from –48 V to + 47 V. The digital input polarity may also be changed.

Low Level Sensors: The first two channels provide variable level inputs compatible with magnetic pickup sensors or variable reluctance sensors, like turbine flowmeters, that provide signals within the level and frequency ranges specified below. These channels are configured with adaptive amplifiers to sense the wide range of sensor output voltages. The E1538A can directly sense voltage from 100 mV to 10 V. Voltages up to 120 V can be sensed using an external resistor.

Totalize, Frequency and Period: Totalize on either positive or negative transitions. Measure frequency with a programmable aperture time. Measure logical 1 pulse widths from 1.5 µs to 1 s.

Quadrature Count: Use two channels to make 24-bit quadrature counts. One channel provides the count, the second channel controls the count direction (up or down). Counts from 0 to 16,777,215.

Rotational Velocity: One E1538A input channel can be used to sense rotational velocity using a toothed wheel sensor. The tooth-to-tooth periods are measured and converted into revolutions-per-second (RPS). Use this function with sensors that have either a missing or extra tooth to mark their index position.

Output Functions

Digital Output: Each E1538A output "open-drain" MOSFET can switch from 0 to 48 V and sink up to 100 mA. An internal pull-up resistor is provided for driving logic devices directly. Output logical polarity is programmable.

Pulse Output: Each E1538A channel can be programmed to output a variety of pulses and pulse trains. Variable width, PWM, FM and rotationally positioned pulse outputs are available.

Stepper Motor Control: The E1538A can control 2- or 4-phase motors in either full- or half-step mode. The SCP can directly drive four-phase stepper motors requiring <100 mA phase current. Higher phase current requirements are possible using external output amplifier circuits.

Product Specifications

Output Characteristics

Current source (logic 1):	
Pull-up off:	0 mA
Pull-up on:	380 mA @ 1.2 V
Current sink (logic 0):	
Pull-up off:	100 mA
Pull-up on:	100 mA
Voltage (logic 1):	
Pull-up off:	0 V
Pull-up on:	5 V (no load)
Voltage (logic 0):	
Pull-up off:	0.1 V max.@ 100 mA load 0.05 max. @ 20 mA load
Pull-up on:	0.1 V max. @ 100 mA 0.5 max. @ 20 mA load

Input Characteristics

Equivalent circuit:	
Pull-up off:	120 k Ω connected to 0 V
Pull-up on:	9.2 k Ω connected to 4.6 V
Maximum input low:	
Pull-up off:	–46 V to 46 V prog.
Pull-up on:	–46 V to 46 V prog.
Minimum input high:	
Pull-up off:	–46 V to 46 V prog.
Pull-up on:	–46 V to 46 V prog.
Maximum voltage:	
Applied to input terminal:	–48 V to 48 V
Applied to output terminal:	0 V to 48 V (diode clamped at –0.3 V)

Totalizer

Capacity:	24 bits or 16,777,215 counts
Minimum pulse width:	500 ns
Frequency range:	0-100 kHz

Artisan Scientific - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisan-scientific.com

Frequency Counter

Gate time ($t_{aperture}$): 1 ms to 1 s, resolution $1/f_{in}$
Range: $1/t_{aperture}$ to 100 kHz
Accuracy: 0.01%
Resolution: $f_{in}/(t_{aperture} \times 4.194\ MHz)$
Min. pulse width: 500 ns

Rotational Velocity Measure

Range in RPS: $1/n_{teeth}$ to $100{,}000/n_{teeth}$
Accuracy: 0.01%
Resolution in RPS: $(n_{teeth} \times f)^2/4.194\ MHz$
Minimum pulse width: 500 ns

Pulse Width Measure

Periods averaged: 1 to 255
Range: 1.5 µS to 1 S
Accuracy: ±(100nS + 0.1%)
Resolution: 59.6 nsec

Frequency Source

Range:
Square wave: 64 Hz to 40 kHz
Other shapes: 128 Hz to 40 kHz
Accuracy: 0.01%
Resolution: $(f_{out})^2$ / 4.194 MHz

Pulse Source

Range:
Pulse width: 7.87 µs to 1/f-7.87 µs
Pulse per trig: 7.87 µs to 7.812 ms
Accuracy: 200 ns + 0.01%
Resolution: 238.4 ns

Current Requirements (Amps)

5 V max	24 V max	-24 V max
0.2	0.054	0.025

Ordering Information

Description	Product No.
Enhanced Frequency/Totalize/PWM SCP	E1538A

Artisan Scientific - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisan-scientific.com

Related Literature

2000 Test System and VXI Catalog CD-ROM,
Agilent Pub. No. 5980-0308E (detailed specifications for VXI products)

2000 Test System and VXI Catalog,
Agilent Pub. No. 5980-0307E (overview of VXI products)

1998 Test System and VXI Products Data Book,
Agilent Pub. No. 5966-2812E

Online

Internet access for Agilent product information, services and support
www.agilent.com/find/tmdir

VXI product information
www.agilent.com/find/vxi

Defense Electronics Applications
www.agilent.com/find/defense_ATE

Agilent Technologies VXI Channel Partners
www.agilent.com/find/vxichanpart

Agilent Technologies' HP VEE Application Website
www.agilent.com/find/vee

Agilent Technologies Data Acquisition and Control Website
www.agilent.com/find/data_acq

Agilent Technologies Instrument Driver Downloads
www.agilent.com/find/inst_drivers

Agilent Technologies Electronics Manufacturing Test Solutions
www.agilent.com/go/manufacturing

Get assistance with all your test and measurement needs at
www.agilent.com/find/assist
or check your local phone book for the Agilent office near you.

Agilent Technologies' test and measurement service/support commitment

Agilent strives to maximize the value our test and measurement products give you, while minimizing your risk and service/support problems. We work to ensure that each product is realistically described in the literature, meets its stated performance and functionality, has a clearly stated global warranty, and is supported at least five years beyond its production life. Our extensive self-help tools include many online resources (www.agilent.com).

Experienced Agilent test engineers throughout the world offer practical recommendations for product evaluation and selection. After you purchase an Agilent product, they can provide no-charge assistance with operation verification and basic measurement setups for advertised capabilities. To enhance the features, performance, and flexibility of your test and measurement products—and to help you solve application challenges—Agilent offers free or extra-cost product options and upgrades, and sell expert engineering, calibration, and other consulting services.

Phone and fax
United States:
Agilent Technologies
(tel) 1 800 452 4844

Canada:
Agilent Technologies Canada Inc.
(tel) 1 877 894 4414

Europe:
Agilent Technologies
Test & Measurement
European Marketing Organisation
(tel) (31 20) 547 2000

Japan:
Agilent Technologies Japan Ltd.
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Latin America:
Agilent Technologies
Latin American Region Headquarters, U.S.A.
(tel) (305) 267 4245
(fax) (305) 267 4286

Australia/New Zealand:
Agilent Technologies Australia Pty Ltd.
(tel) 1 800 629 485 (Australia)
(fax) (61 3) 9272 0749
(tel) 0 800 738 378 (New Zealand)
(fax) (64 4) 802 6881

Asia Pacific:
Agilent Technologies, Hong Kong
(tel) (852) 3197-7777
(fax) (852) 2506-9284

Data Subject to Change
© Agilent Technologies 2000
Printed in the U.S.A. 04/2000
Publication No.: 5966-2409E

Agilent Technologies
Innovating the HP Way

Artisan Scientific - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisan-scientific.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP