



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗


WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

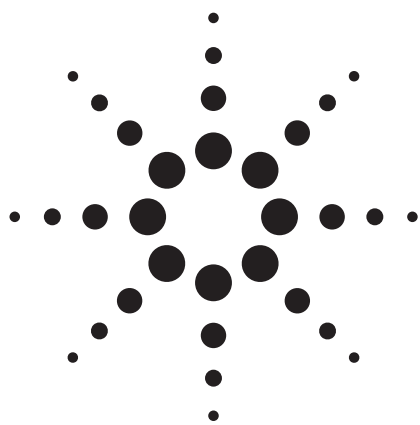

Agilent E1563A, E1564A 800 kSa/s, 2- and 4-Channel Digitizers

Data Sheet


- 800 kSa/s sample rate with 14-bit resolution
- Input ranges up to 256 V, channel isolation 256 V
- Common mode rejection 113 dB
- Time or event triggering with selectable reading counts
- Switchable 25 kHz input filter/channel (E1563A)
- Four selectable input filters/channel—1.5 kHz, 6 kHz, 25 kHz, 100 kHz (E1564A)

Description

The Agilent Technologies E1563A and E1564A digitizers are **C-size, 1-slot, register-based VXI modules**. They are ideal for measurements in electronic production test and electromechanical design characterization, particularly in environments with high levels of electrical noise. Engineers and technicians in manufacturing test, product development, and engineering research test groups can fully characterize electronic and mechanical transient waveforms with these highly accurate digitizers.

Each channel of the digitizers has its own analog electronics, including 800 kSa/s 14-bit A/D converters, and independent channel isolation. The E1563A channels have switchable 25 kHz input filters, and the E1564A channels have four (4) selectable input filters.

The digitizers are configured for PC SIMM memory, scalable from 4 Mbytes to 64 Mbytes. The large memory can easily capture transients and act as a FIFO to allow continuous digitizing while unloading data with block mode transfers.

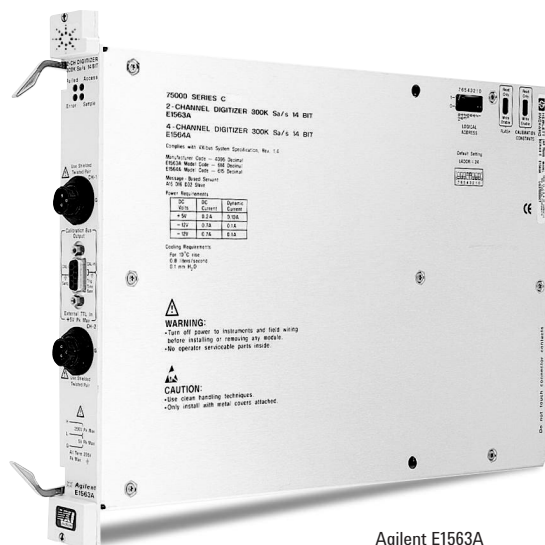

Agilent E1563A



Agilent E1564A



Time Base and Triggering

All channels sample simultaneously with a single internal or external time base. Triggering can be set up for either time or event modes with programmable pre- and post-trigger reading counts.

Programming

The E1563A and E1564A both have a simple programming model which includes a data FIFO or flat file memory model for the A/D converter, 16-bit integer data corrected for offset and gain errors, and a current value table to retrieve the current sample of data.

Calibration

The E1564A provides a calibration source with flash ROM for holding calibration constants.

Refer to the Agilent Technologies Website for instrument driver availability and downloading instructions, as well as for recent product updates, if applicable.

Product Specifications

Number of channels:	2 (E1563A) 4 (E1564A)
Bandwidth:	1 MHz
Resolution:	14 bits (including sign)
Sample rates:	1 Sa/s to 800 kSa/s
Built-in DSP:	No
Alias protection:	Oversample
Basic accuracy:	0.1%
Time Base resolution:	0.1 μ s
Low-frequency CMRR:	113 dB
Variable bandwidth:	E1563A: 25 kHz switchable filter E1564A: 4 selectable filters, 2-pole linear phase
2 dB Input range headroom:	n/a
Trigger:	Time & Event
Pre-arm capture:	Yes
Memory:	4 Mbyte to 64 Mbyte PC SIMM
Dual-ported memory:	Yes
Dual-rate sampling:	No
Segmented memory:	No
E1564A selectable input filters (per channel):	1.5 kHz, 6 kHz, 25 kHz, 100 kHz

Accuracy

Range:	Zero Offset ¹ (with filter OFF)		Zero Offset ¹ (with filter ON)		Gain (% of reading)		Noise (3 sigma)
	Specifi- cation ²	Temperature Coefficient ³	Specifi- cation ²	Temperature Coefficient ³	Specifi- cation ²	Temperature Coefficient ³	Specifi- cation ²
0.0625 V	20 μ V	1.9 μ V/ $^{\circ}$ C	28 μ V	4.3 μ V/ $^{\circ}$ C	0.034%	0.0061%/ $^{\circ}$ C	57 μ V
0.25 V	78 μ V	6 μ V/ $^{\circ}$ C	110 μ V	16 μ V/ $^{\circ}$ C	0.034%	0.0061%/ $^{\circ}$ C	180 μ V
1 V	300 μ V	15 μ V/ $^{\circ}$ C	430 μ V	63 μ V/ $^{\circ}$ C	0.034%	0.0061%/ $^{\circ}$ C	720 μ V
4 V	1.2 mV	60 μ V/ $^{\circ}$ C	1.7 mV	251 μ V/ $^{\circ}$ C	0.034%	0.0061%/ $^{\circ}$ C	2.88 mV
16 V	21 mV	1.3 mV/ $^{\circ}$ C	21 mV	1.63 mV/ $^{\circ}$ C	0.034%	0.0061%/ $^{\circ}$ C	14.7 mV
64 V	28 mV	1.65 mV/ $^{\circ}$ C	34 mV	4.24 mV/ $^{\circ}$ C	0.034%	0.0061%/ $^{\circ}$ C	48 mV
256 V	79 mV	4.28 mV/ $^{\circ}$ C	110 mV	16.2 mV/ $^{\circ}$ C	0.034%	0.0061%/ $^{\circ}$ C	189 mV

¹Valid within the range of 0 $^{\circ}$ C to 55 $^{\circ}$ C. A zero offset calibration for all channels must be performed if the instrument experiences a temperature <0 $^{\circ}$ C or >55 $^{\circ}$ C for these specifications to remain valid.

²Specification is valid when tested at a temperature within \pm 5 $^{\circ}$ C of the calibration temperature.

³Amount of error that must be added for each $^{\circ}$ C outside of \pm 5 $^{\circ}$ C of the calibration temperature.

Integral Non-Linearity Specification

All ranges: 2.5 LSB

Environmental Specifications

For indoor use:	Pollution degree 2
Operating altitude:	3000 meters or mainframe altitude specification, whichever is lower
Operating temperature:	0 $^{\circ}$ C to 55 $^{\circ}$ C
Relative humidity:	Up to 80% at 31 $^{\circ}$ C, decreasing to 50% at 40 $^{\circ}$ C

General Specifications

VXI Characteristics

VXI device type:	Register based
Data transfer bus:	A16, slave only
Size:	C
Slots:	1
Connectors:	P1/2
Shared memory:	None
VXI buses:	TTL

Instrument Drivers - See the Agilent Technologies Website (http://www.agilent.com/find/inst_drivers) for driver availability and downloading.

Command module firmware:	Downloadable
Command module firmware rev:	A.01.00
I-SCPI Win 3.1:	No
I-SCPI Series 700:	No
C-SCPI LynxOS:	No
C-SCPI Series 700:	No
Panel Drivers:	No
VXIplug&play Win Framework:	No
VXIplug&play Win 95/NT Framework:	Yes
VXIplug&play HP-UX Framework:	No

Note: The Agilent VEE application can use VXIplug&play drivers or panel drivers.

Cooling/Slot

Watts/slot:	E1563A: 20.6 E1564A: 37.4
ΔP mm H₂O:	0.18
Air flow liter/s:	2.8

Module Current

	E1563A		E1564A	
	I _{PM} (A)	I _{DM} (A)	I _{PM} (A)	I _{DM} (A)
+5 V:	1.1	0.5	1.1	0.5
+12 V:	0.6	0.1	1.2	0.1
-12 V:	0.6	0.1	1.2	0.1
+24 V:	0	0.01	0.05	0.01
-24 V:	0	0.01	0.05	0.01
-5.2 V:	0.1	0.01	0.01	0.01
-2 V:	0.1	0.01	0.01	0.01

Ordering Information

Description	Product No.
800 kSa/s 2-Channel VXI Digitizer	E1563A
Add Manual Set	E1563A 0B1
Convert Standard Warranty to On-site	E1563A W01
800 kSa/s, 4-Channel VXI Digitizer	E1564A
Add Manual Set	E1564A 0B1
Convert Standard Warranty to On-site	E1564A W01

**Agilent Technologies'
Test and Measurement Support,
Services, and Assistance**

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

By internet, phone, or fax, get assistance with all your test & measurement needs.

Online assistance:

www.agilent.com/find/assist

Phone or Fax

United States:
(tel) 1 800 452 4844

Canada:
(tel) 1 877 894 4414
(fax) (905) 282 6495

China:
(tel) 800 810 0189
(fax) 1 0800 650 0121

Europe:
(tel) (31 20) 547 2323
(fax) (31 20) 547 2390

Japan:
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Korea:
(tel) (82 2) 2004 5004
(fax) (82 2) 2004 5115

Latin America:
(tel) (305) 269 7500
(fax) (305) 269 7599

Taiwan:
(tel) 080 004 7866
(fax) (886 2) 2545 6723

Other Asia Pacific Countries:
(tel) (65) 375 8100
(fax) (65) 836 0252
Email: tm_asia@agilent.com

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2001
Printed in USA September 1, 2001
5988-2341EN





Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com