

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Keysight / Agilent M9502A* at our website: ***Click HERE***

Agilent M9502A and M9505A

2 and 5-Slot
AXIe Chassis

Data Sheet



DISCOVER the Alternatives...

... Agilent **MODULAR** Products

Agilent Technologies

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com



INTRODUCTION

Product description

The M9502A and M9505A AXIe chassis are fully compatible with the AXIe 1.0 specification. They provide 2 or 5 slots for AXIe instrument modules, and have an embedded system module that does not take up an instrument slot. The embedded system module (ESM) provides Gigabit LAN and Gen 2 x8 PCIe interfaces for connecting the chassis to an external controller. To minimize rack space, the instrument module slots are arranged horizontally. In addition, the chassis are designed to be easily maintained. Both the power supply and fan tray can be removed with modules installed while the chassis remains in the rack.

Applications

- Aerospace and defense
- Computation
- Communications
- Electronics test
- Semiconductor testing
- High-energy physics



Features

- AXIe 1.0 compliant
- Embedded system module with Gen 2 PCIe x8 and Gigabit LAN interfaces for connecting to host computer
- Agilent-exclusive, built-in inter-chassis synchronization for multi-chassis systems
- 62 differential local bus lines provide very large data path between adjacent modules
- High power with 200W cooling per slot
- Front-removable fan tray

Customer values

- AXIe chassis provide a high-performance platform to compliment PXI-based systems
- The compact, 2-slot chassis is ideal for transportable applications, but is also rack-mountable
- The 5-slot chassis provides a cost-effective solution when more AXIe slots are required
- The embedded AXIe system module and horizontal module placement save rack space, requiring only 2U or 4U, depending on model
- With the innovative cooling design, no additional rack space is required to meet cooling specifications

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

EASY SETUP ... TEST ... AND MAINTENANCE



Hardware platform

Compliance

The M9502A and M9505A chassis are fully compliant with the AXIe 1.0 specification. In addition, the chassis complies with AdvancedTCA (ATCA) PICMG 3.0 R2.0 specifications, and is electrically compatible with standard ATCA modules.

An additional half-height slot is built into the chassis and reserved for the embedded system module. This slot is not compatible with AXIe instrument modules or embedded computers. Embedded controllers must be installed in one of the instrument module slots.

Backplane configuration

The AXIe backplane in the Agilent M9502A and M9505A chassis include all of the following AXIe backplane lines:

- Timing and triggering signals including: 100 MHz clock, 100 MHz PCIe clock (FCLK), point-to-point star trigger from ESM (SYNC), bi-directional point-to-point star trigger (STRIG), and 12 signal parallel trigger bus (TRIG)
- Distributed PCIe Gen 2 data fabric from ESM (x4 to each slot) plus a secondary PCIe data fabric
- Distributed gigabit Ethernet LAN to each slot
- 62-pair local bus for adjacent module signaling or data transfer (AXIe only requires 18 pairs)
- 42V DC power rail
- Intelligent Platform Management Bus (IPMB) for chassis control, including module power-up

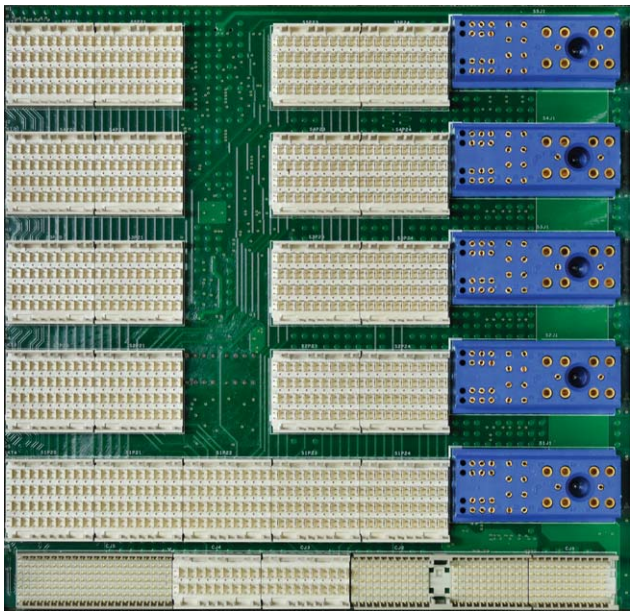


Figure 1. 5-slot AXIe backplane

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

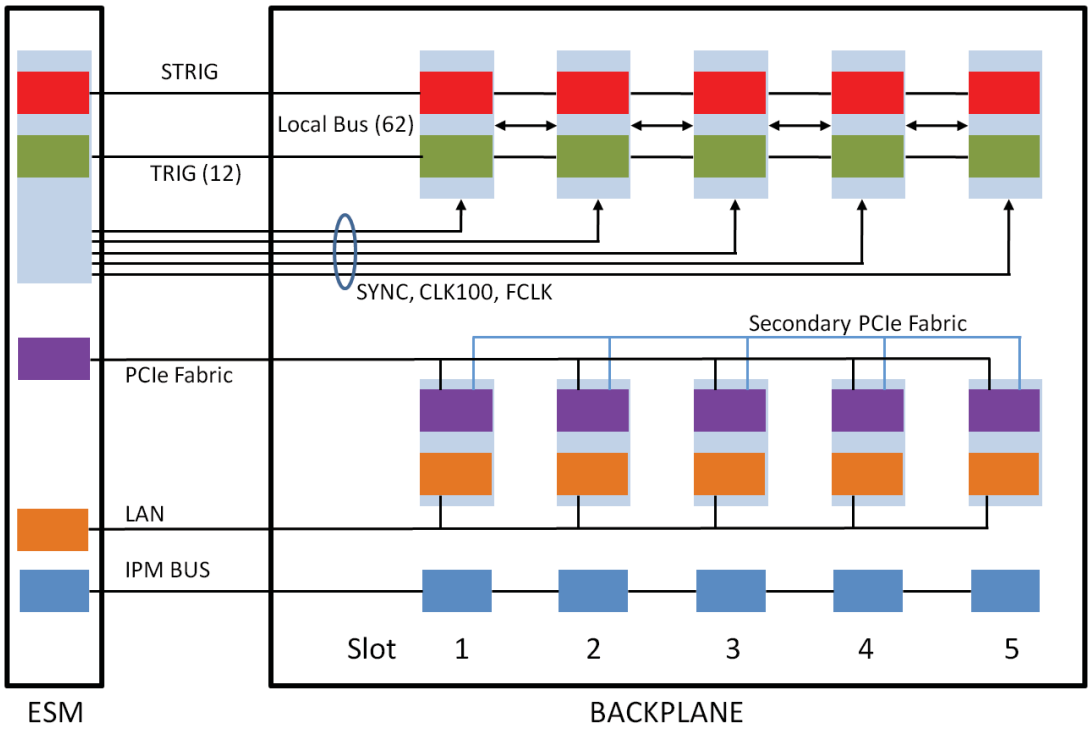


Figure 2. M9505A backplane block diagram


Embedded system module (ESM)

Both the M9502A and M9505A chassis contain an embedded system module that does not take up an instrument slot. This module performs the chassis management functions contained in the AXIe specification, including:

- Managing trigger and clock busses
- Managing clocks, including internal or external reference sources
- Gigabit LAN switching with a front panel RJ45 LAN connection
- AXIe Fabric 1 switching (Gen 2 x4 lanes to each module slot)
- Monitoring the health of the chassis subsystems and modules
- Controlling the chassis cooling fans, and managing the chassis power-up sequence

In addition to the required functions, the system module also provides:

- Ability to synchronize multiple chassis with trigger and clocking signals (Mini D In/Out connectors)
- SMA connectors for external clock in/out and trigger in/out
- Gen 2 x8 PCIe cable connector for connecting the chassis to an external computer

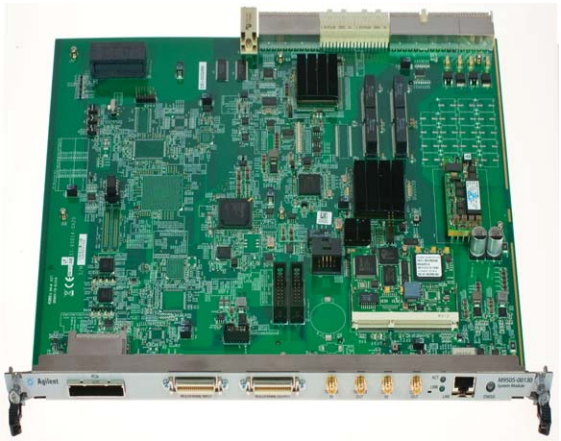

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Innovative cooling

The AXIe chassis utilize a cooling design that does not require additional rack space to cool the modules. This allows the chassis to fit into 2U or 4U of rack space.

The cooling design uses auto-speed fans to pull in cool air. Air flows from right-to-left within the chassis. The ESM provides intelligent control of the power supplies and fans and ensures there is sufficient power/cooling for each module.

Lower maintenance costs

The chassis were designed to reduce maintenance costs. The innovative air-flow design does not require air filters to replace. In addition, the power supply and fans can be removed while the chassis is mounted in a rack, allowing the chassis to be serviced while keeping DUT cabling in place.

Software platform

Drivers

The M9502A and M9505A chassis come complete with IVI-COM, IVI-C, and LabVIEW drivers. Windows XP®, Windows Vista®, and Windows 7® operating systems are supported and applications can be completed using many different software tools including LabVEW, LabWindows/CVI, MATLAB, VEE, VisualStudio.NET® (C/C++, C#, VB.NET).

Chassis Web server

Both AXIe chassis include a built-in Web server for configuration, control, and monitoring of the chassis.
This Web server can be accessed by either LAN or PCIe.

The following functions are provided:

- Chassis information
- Chassis LAN configuration
- Instrument module inventory
- Trigger routing setup
- Chassis health (temperature, fan, power supply)

Soft front panel

A soft front panel interface is also provided to monitor and control the AXIe chassis. It has some of the basic functionality of the chassis Web page and communicates to the chassis using the IVI drivers. The soft front panel has two screens: trigger routing and chassis monitor.

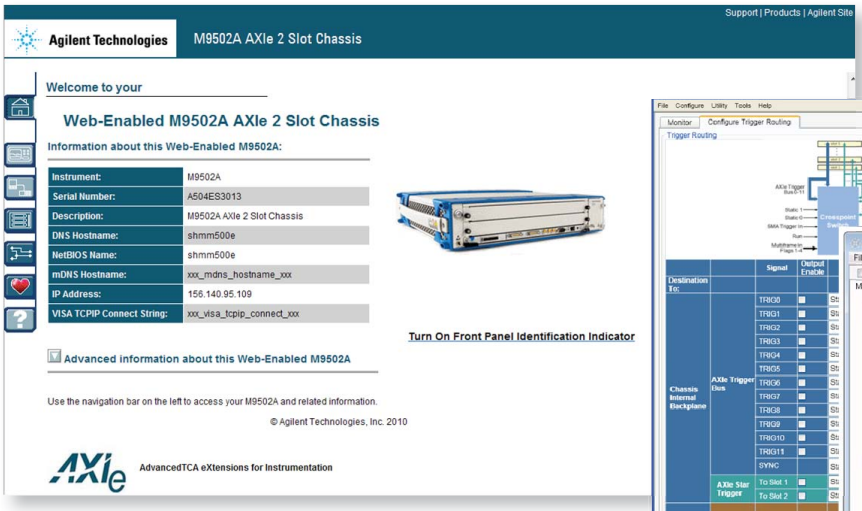


Figure 3. Chassis Web page

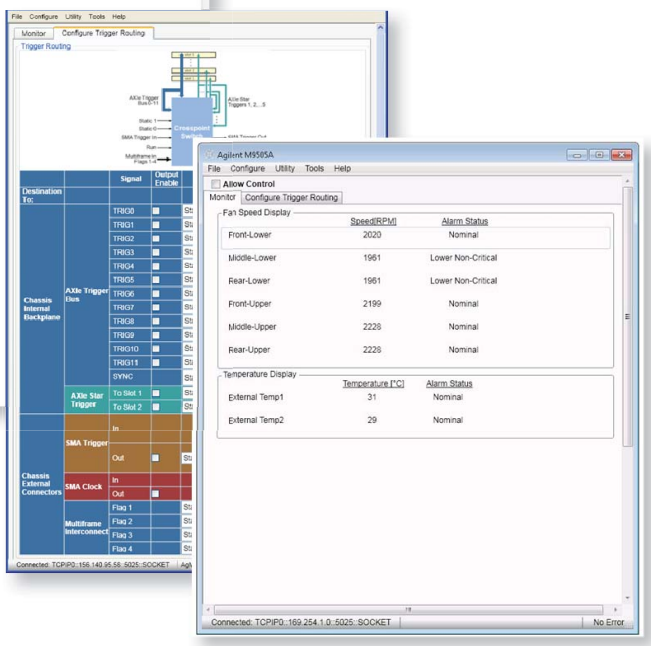


Figure 4. Chassis soft front panel interface

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

TECHNICAL SPECIFICATIONS AND CHARACTERISTICS

Chassis characteristics

Standards compliance

AXIe 1.0 Base Architecture specification
AdvancedTCA PICMG 3.0 R2.0 specification

Backplane

	M9502A	M9505A
Total slots	2	5
Instrument module slots	2	5
System module	Embedded	Embedded

Power supply characteristics

AC input

	M9502A	M9505A
Operating voltage range	100-240 VAC	100-240 VAC
Input frequency range	50-60 Hz	50-60 Hz
Input power consumption	800 VA	1280 VA
Overcurrent protection	Auto-recovery	Auto-recovery
Efficiency (typical)	85-90%	85-93%

DC supply

Model	DC output	Total DC power	Maximum current	Load regulation	Maximum ripple and noise (20 MHz BW)
M9502A	50 V	520 W	10.4 A	2%	1% pk-pk
M9505A	52 V	1020 W[1]	19.6 A	2%	500 mV pk-pk

Chassis cooling and power dissipation

Slot airflow direction	Right to left
Chassis cooling intake	Right side of chassis
Chassis cooling exhaust	Left side of chassis
Chassis cooling fans	
M9502A	Three 90.0 cfm fans on fan tray with HIGH/AUTO speed selector
M9505A	Six 90.0 cfm fans on fan tray with HIGH/AUTO speed selector
Power dissipation, instrument slot	200 W max

1. M9505A configurations that consume more than 850 W (200-240 V) or 400 W (100-120 V) total power across all five slots may experience occasional system reset if installed in environments prone to line voltage dropouts in excess of 20 ms. In such an event, the PC controlling the chassis will require a restart or reboot. To avoid system resets due to line dropouts, use an uninterruptable power supply.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

TECHNICAL SPECIFICATIONS AND CHARACTERISTICS

Clocks and triggers	
100 MHz system clock (CLK100)	
Accuracy	± 20 ppm
Duty cycle	45/55%
Maximum slot-to-slot skew	100 ps
External clock in (SMA)	
Input frequency	10 MHz ± 100 ppm
Input level	± 5 V, AC coupled
Minimum swing	250 mV
External clock out (SMA)	
Output frequency	10 MHz
Output level	3.3 V CMOS
Output load	50 ohm
AXIe differential star trigger (STRIG)	
Maximum slot-to-slot skew	100 ps
External trigger out (SMA)	
Output level	3.3 V CMOS
Output load	50 ohm
External trigger in (SMA)	
Input level	± 5 V, adjustable threshold
Input impedance	4 kohm (pulled up to 2.5 V)
Minimum swing	250 mV

Environmental characteristics [1, 2]		
Operating and storage conditions		
	Operating	**Storage**
Temperature	0˚C to 50˚C	-25˚C to 60˚C
Humidity	Type tested at 95%, +40˚C (non-condensing)	Type tested at 95%, +40˚C (non-condensing)
Altitude	up to 3000 meters	up to 4600 meters
Shock and vibration		
Operating random vibration: type tested at 5 to 500 Hz, 0.21 g rms		
Survival random vibration: type tested at 5 to 500 Hz, 2.09 g rms		
Acoustical sound power (LWA dB, ref 1pW)		
	Worst case	**Normal operation (25˚C air intake)**
M9502A	74.3	55.2
M9505A	77.6	62.8

1. Samples of this product have been type tested in accordance with the Agilent Environmental Test Manual and verified to be robust against the environmental stresses of storage, transportation, and end-use; those stresses include but are not limited to temperature, humidity, shock, vibration, altitude, and power line conditions.

2. Test methods are aligned with IEC 60068-2 and levels are similar to MIL-PRF-28800F Class 3

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

TECHNICAL SPECIFICATIONS AND CHARACTERISTICS

Regulatory characteristics

Safety

Complies with European Low Voltage Directive 2006/95/EC

IEC/EN 61010-1, 2nd Edition

Canada: CSA C22.2 No. 61010-1-04

USA: UL std no. 61010-1, 2nd Edition

German Acoustic statement	
Acoustic noise emission LpA < 70 dB Operator position Normal position Per ISO 7779	Geraeuschemission LpA < 70 dB Am Arbeitsplatz Normaler Betrieb Nach DIN 45635 t.19

EMC

Complies with European EMC Directive 2004/108/EC

IEC/EN 61326-1

Canada: CSA C22.2 No. 61010-1-04

CISPR Pub 11 Group 1, Class A

AS/NZS CISPR 11

ICES/NMB-001
This ISM device complies with Canadian ICES-001; cet appareil ISM est conforme a la norme NMB-001 du Canada

General characteristics

Mechanical


	Weight (nom)[1]	Size with bumpers	Size without bumpers
M9502A	7.7 kg (17 lbs)	462mm W x 102mm H x 414mm D	432mm W x 87mm H x 414mm D
M9505A	13.3 kg (29.3 lbs)	462mm W x 193mm H x 436mm D	432mm W x 177mm H x 436mm D

1. Without modules

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

TECHNICAL SPECIFICATIONS AND CHARACTERISTICS

ESM front panel connectors

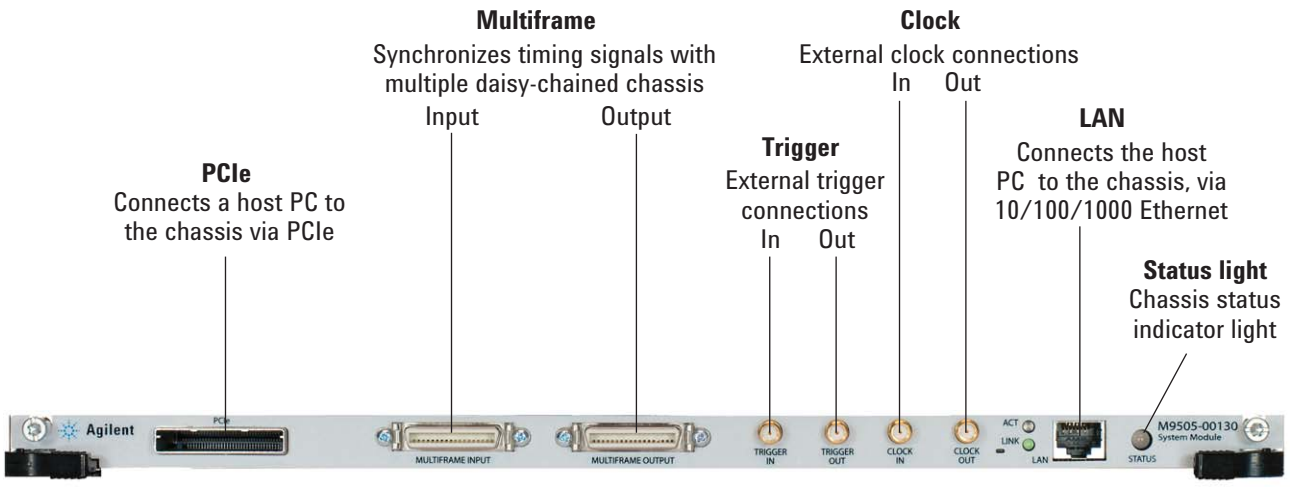

System requirements

Operating systems	Windows® XP, Service Pack 3 or later (32-bit)	Windows Vista, SP1 and SP2 (32-bit and 64-bit), Business, Ultimate, Enterprise, Home Basic, and Home Premium	Windows 7 (32-bit and 64-bit) Starter, Home Basic, Home Premium, Professional, Ultimate, Enterprise
Processor speed	600MHz or higher required 800MHz recommended	1Ghz 32-bit (x86), 1GHz 64-bit (x64),no support for Itanium 64	1GHz 32-bit (x86), 1GHz 64-bit (x64), no support for Itanium 64
Available memory	256 MB minimum (1 GB or greater recommended)	1 GB minimum	1 GB minimum
Available disk space [1]	1.5 GB available hard disk space, includes: · 1GB available for Microsoft .NET Framework 3.5 SP1 [2] · 100MB for Agilent IO Libraries Suite	1.5 GB available hard disk space, includes: · 1GB available for Microsoft .NET Framework 3.5 SP12 · 100MB for Agilent IO Libraries Suite	1.5 GB available hard disk space, includes: · 1GB available for Microsoft .NET Framework 3.5 SP12 · 100MB for Agilent IO Libraries Suite
Video	Super VGA (800x600) 256 colors or more	Support for DirectX 9 graphics with 128MB graphics memory recommended (Super VGA graphics is supported)	Support for DirectX 9 graphics with 128MB graphics memory recommended (Super VGA graphics is supported)
Browser	Microsoft® Internet Explorer 6.0 or greater	Microsoft Internet Explorer 7 or greater	Microsoft Internet Explorer 7 or greater

1. Because of the installation procedure, less memory may required for operation than is required for installation.
2. NET Framework Runtime Components are installed by default with Windows Vista and Windows 7. Therefore, you may not need this amount of available disk space.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

CONFIGURATION

Hardware

Model	Description
M9502A	2-slot AXIe chassis with embedded system module
M9505A	5-slot AXIe chassis with embedded system module
Includes:	AXIe filler modules, getting started guide, drivers, and Agilent I/O libraries

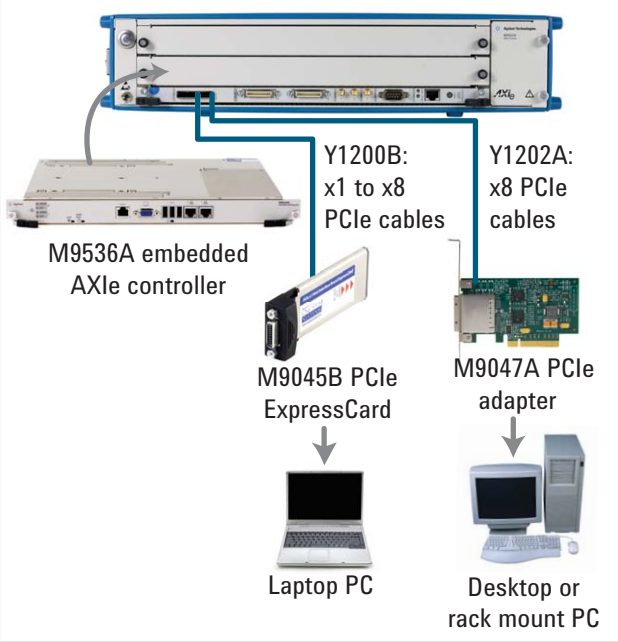


Figure 5. Configuration

Recommended configuration

Configure the Agilent M9502A and M9505A AXIe chassis, as follows:

- If an external computer is being used, select an appropriate PC interface card; the Agilent M9047A is recommended
- If the M9536A embedded AXIe controller is used, it must go into slot one (it does not replace the ESM)
- Select an appropriate cable to connect the computer interface board to the system module; the Y1202A is recommended to connect the M9047A to the M9502A or M9505A
- Select rack mount and multi-chassis cables as required

Accessories

Model	Description
Y1225A	Rack mount kit for M9502A
Y1226A	Rack mount kit for M9505A
Y1223A	AXIe multi-frame cable: 0.5m
Y1224A	AXIe multi-frame cable: 3m

Related products

Model	Description
M9536A	Embedded AXIe PC controller
M9045B	PCIe ExpressCard adaptor: Gen 1
Y1200B	PCIe cable: x1 to x8, 2.0 m (used with M9045B)
M9047A	PCIe desktop PC adapter: Gen 2, x8
Y1202A	PCIe cable: x8, 2.0 m (used with M9047A)

Software

Model	Description
Supported operating systems	Microsoft Windows® XP (32-bit), Microsoft Windows® Vista (32/64-bit), Microsoft Windows® 7 (32/64-bit)
Standard compliant drivers	IVI-COM, IVI-C, LabVIEW
Supported application development environments (ADE)	VisualStudio® (VB.NET, C#, C/C++), LabVIEW, LabWindows/CVI, VEE
Agilent IO Libraries	Includes: VISA Libraries, Agilent Connection Expert, IO Monitor

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com



ORDERING

Model	Description
M9502A	AXIe chassis: 2-slot with embedded system module
M9505A	AXIe chassis: 5-slot with embedded system module
Opt 900-932	Optional power cords

Definitions for specifications

Specifications describe the warranted performance of calibrated instruments that have been stored for a minimum of 2 hours within the operating temperature range of 0 °C to 50 °C, unless otherwise stated, and after a 45 minute warm-up period. Data represented in this document are specifications unless otherwise noted.

Characteristics describe product performance that is useful in the application of the product, but that is not covered by the product warranty. Characteristics are often referred to as Typical or Nominal values.

- *Typical describes characteristic performance, which 80% of instruments will meet when operated over a 20 °C to 30 °C temperature range. Typical performance is not warranted.*
- *Nominal describes representative performance that is useful in the application of the product when operated over a 20 °C to 30 °C temperature range. Nominal performance is not warranted.*

Note: All graphs contain measured data from several units at room temperature unless otherwise noted.

WARRANTY AND CALIBRATION

Advantage Services: Calibration and Warranty

Agilent Advantage Services is committed to your success throughout your equipment's lifetime.

Warranty[1]

	Standard warranty is 1 year
R-51B-001-3C	1 year return-to-Agilent warranty extended to 3 years
R-51B-001-5C	1 year return-to-Agilent warranty extended to 5 years

1. Options not available in all countries.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com



The Modular Tangram

The four-sided geometric symbol that appears in this document is called a tangram. The goal of this seven-piece puzzle is to create identifiable shapes—from simple to complex. As with a tangram, the possibilities may seem infinite as you begin to create a new test system. With a set of clearly defined elements—hardware, software—Agilent can help you create the system you need, from simple to complex.



DISCOVER the Alternatives ...
... Agilent **MODULAR** Products

www.pxisa.org

www.axiestandard.org

Agilent Channel Partners

www.agilent.com/find/channelpartners

Agilent Advantage Services

Agilent Advantage Services is committed to your success throughout your equipment's lifetime.

www.agilent.com/find/advantageservices

Agilent Email Updates

www.agilent.com/find/emailupdates

PICMG and the PICMG logo, CompactPCI and the CompactPCI logo, AdvancedTCA and the AdvancedTCA logo are US registered trademarks of the PCI Industrial Computers Manufacturers Group."PCIe" and "PCI EXPRESS" are registered trademarks and/or service marks of PC-SIG. Microsoft, Windows, Visual Studio, Visual C++, Visual C#, and Visual Basic are either registered trademark or trademarks of Microsoft Corporation in the United States and/or other countries.

www.agilent.com
www.agilent.com/find/modular
www.agilent.com/find/axie-chassis

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at: **www.agilent.com/find/contactus**

Americas	
Canada	(877) 894 4414
Brazil	(11) 4197 3500
Mexico	01800 5064 800
United States	(800) 829 4444

Asia Pacific	
Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 375 8100

Europe & Middle East	
Belgium	32 (0) 2 404 93 40
Denmark	45 70 13 15 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
United Kingdom	44 (0) 118 9276201

For other unlisted Countries: **www.agilent.com/find/contactus**

Revised: October 14, 2010

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2011
Printed in USA, December 5, 2011
5990-6584EN

Agilent Technologies

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP