ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Aitech Defense Systems A176 Cyclone* at our website: ***Click HERE***

A176 – Cyclone

GPGPU Fanless Small FF RediBuilt™ Supercomputer

Aitech
Embedded Computing *without* Compromise



The A176 Cyclone is the smallest and most powerful Rugged-GPGPU, ideally suited for distributed systems. Originally available with the TX1, the A176 is now available with the even more powerful and more efficient TX2.

Its 256 CUDA cores reach 1 TFLOPS at a remarkable level of energy efficiency, providing all the power you need for local processing right where you need it, next to your sensors.

With its compact size, the A176 Cyclone is the most advanced solution for video and signal processing for the next generation of autonomous vehicles, surveillance and targeting systems, EW systems, and many other applications.

Rugged GPGPU is Aitech


- **SWaP Optimized Rugged HPEC**
- **Ultra Small Form Factor – 129 mm [5.1"] square, < 1 kg [2.2 lbs.]**
- **NVIDIA® Jetson™ TX2 System on Module**
  - Pascal™ Architecture GPU w/256 CUDA® cores
  - NVIDIA Denver 2 Dual-Core ARM® CPU + Cortex® A57 Quad-Core ARM® CPU
  - 1 TFLOPS
  - H.264/H.265 HW Encoder
  - Best Available Performance per Watt – 60 GFLOPS/W
- **SATA SSD with Quick Erase & Secure Erase**
- **8 GB LPDDR4**
- **Video Capture**
  - SDI (SD/HD) w/dedicated H.264 encoder
  - Composite (RS-170A [NTSC]/PAL), 8 channels available simultaneously
- **I/O**
  - Gigabit Ethernet
  - UART Serial
  - USB 2.0
  - Discretes
  - DVI/HDMI Output
  - Composite Input
  - SDI Input
  - CANbus
- **CUDA®, OpenGL, OpenGL ES, EGL**
- **Low Power Consumption**
- **Environmentally Sealed (IP67)**
- **Development Platforms Available**



A176 – Cyclone

GPGPU Fanless Small FF RediBuilt™ Supercomputer

Aitech
Embedded Computing *without* Compromise

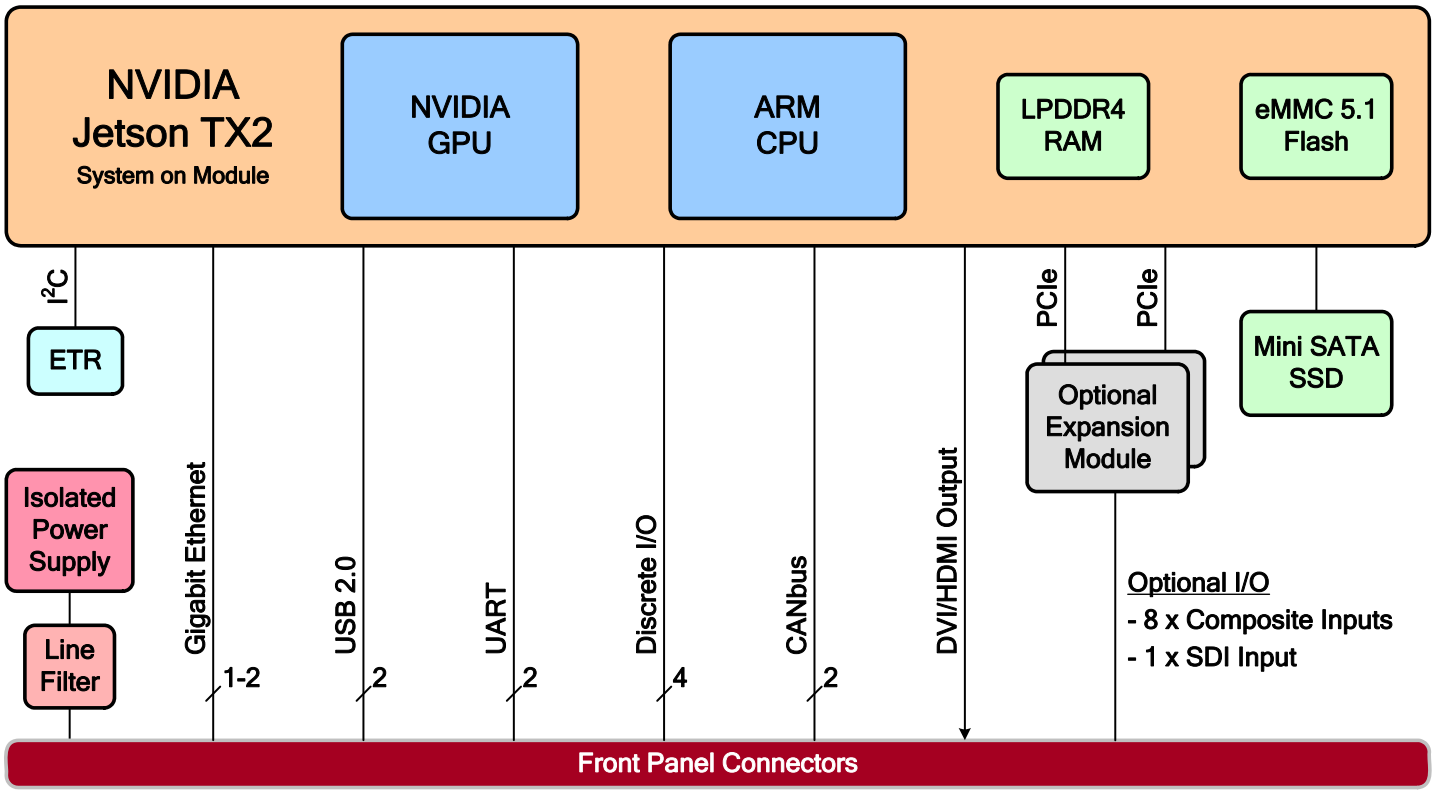

A176 – Cyclone

GPGPU Fanless Small FF RediBuilt™ Supercomputer

Aitech
Embedded Computing *without* Compromise

System Architecture

System on Module	NVIDIA Jetson TX2
GPU	• NVIDIA Pascal GPU Architecture • 256 Shaders/CUDA cores • > 1 TFLOPS (fp16) • CUDA • OpenGL • OpenGL ES
CPU	ARMv8 (64-bit) heterogeneous multi-processing (HMP) architecture with two CPU clusters (6 processor cores) • NVIDIA Denver 2 Dual-Core @ 2.0 GHz, 128 KB L1 instruction cache + 64 KB L1 data cache per core, 2 MB L2 Unified Cache • ARM® Cortex® A57 Quad-Core @ 2.0 GHz, 48 KB L1 instruction cache + 32 KB L1 data cache per core, 2 MB L2 Unified Cache
Security	• HW acceleration for AES 128/192/256 encryption and decryption • HW acceleration for AES CMAC, SHA-1, SHA-256, SHA-384, and SHA-512 algorithms • 2048-bit RSA HW • HW Random Number Generator (RNG) SP800-90
Expansion Options	Main board accommodates up to two optional I/O expansion modules. Available options include: • Composite Frame Grabber • SDI Frame Grabber Included expansion modules are determined by system I/O Variant, see the *I/O* section below for details (additional options may be available per customer request, contact an Aitech representative for more info)
System Resources	• Multi-standard Video/JPEG Decoder/Encoder, HW Encoding for H.264/H.265 • Dynamic voltage and frequency scaling • Temperature Sensors • Elapsed Time Recorder • Status Indicator LED

Memory Resources

RAM	8 GB LPDDR4 @ 1866 MHz, 128-bit interface
eMMC	32 GB eMMC 5.1 (boot source)
SATA SSD	Optional Mini SATA SSD with SLC/MLC Flash, Quick Erase, and Secure Erase options (additional options may be available per customer request, contact an Aitech representative for more info)

A176 – Cyclone

GPGPU Fanless Small FF RediBuilt™ Supercomputer

Aitech
Embedded Computing *without* Compromise

I/O

		I/O Variant			
		00	**01**	**02**	**03**
Expansion Card Options	**Composite Frame Grabber**	–	✓	–	✓
	SDI Frame Grabber	–	–	✓	✓
Composite Input RS-170A (NTSC)/PAL, supports simultaneous capture of all channels at full frame rates		–	8	–	8
SDI Input 480/60i, 576/50i, 720/60p, 1080/60i, 1080/30p, dedicated H.264 encoder		–	–	1	1
Gigabit Ethernet (10/100/1000Base-T)		2			1
DVI (single-link) / HDMI Output		1			
USB 2.0		2			
Serial Ports (RS-232 UART)		2			
Discrete I/O (Single-Ended)		4			
CANbus		2			

Software

- Linux OS pre-installed – L4T (Linux for Tegra), a lightly modified Ubuntu-based distribution
- Video capture drivers and sample applications pre-installed, in variants equipped with optional frame grabber(s)
- BIT (Built-In Tests) are available, contact an Aitech representative for more information

Mechanical

Dimensions	127 x 129 x 52 mm [5.0 x 5.1 x 2.05"]
Weight	< 1 kg [2.2 lbs.]

Power

Input Power	• Wide input voltage range: 11 – 36 V_{DC} steady state operation • Input reverse polarity protection • EMI/RFI input filter • On-board supplies isolated from external supply • MIL-STD-704 and MIL-STD-1275 compliant (no hold-up)
Power Consumption	• ≤5 W idle • 8 – 10 W under typical CUDA load • 17 W when System on Module is fully utilized Total power consumption depends on system configuration and expansion options

A176 – Cyclone

GPGPU Fanless Small FF RediBuilt™ Supercomputer

Aitech
Embedded Computing *without* Compromise

Environmental

Operating Temp.	**Min.**	-40 °C
	Max.	+65 °C w/TX2 in Max-N power mode (1) +71 °C w/TX2 in Max-Q power mode (1)
Non-Operating Temp.		-55 to +105 °C
Vibration		V2 per VITA 47
Operating Shock		OS2 per VITA 47
Altitude		-1,500 to +60,000 ft. (2)
Relative Humidity		0 – 100%
Ingress Protection		IP67 (3)
Rain		MIL-STD-810F, Method 506.4, Procedure III
Dust		MIL-STD-810F, Method 510.4, Procedure I & II
Salt Fog		MIL-STD-810F, Method 509.4
Bench Handling		MIL-STD-810F, Method 516.5, Procedure VI
Fungus		Fungus Resistant
EMI/RFI		MIL-STD-461

Notes:
(1) TX2 power modes are user configurable via software
(2) Depending on temperature and system power dissipation
(3) With appropriate connections to system I/O and power connectors

A176 – Cyclone

GPGPU Fanless Small FF RediBuilt™ Supercomputer

Aitech
Embedded Computing *without* Compromise

Ordering Information

Ruggedization
2 = Rugged

I/O Variant
See *I/O* table above

A176 - [ ] [ ] [ ] [ ] 0 0 - [ ] [ ]

System On Module
2 = NVIDIA Jetson TX2
1 = NVIDIA Jetson TX1
TX1 is not recommended for new designs, contact an Aitech representative for more info

SATA SSD
0 = None
2 = 32 GB SLC, QE, SE
3 = 64 GB MLC, QE
4 = 128 GB MLC, QE
SLC - Single Level Cell
MLC - Multi Level Cell
QE - Quick Erase
SE - Secure Erase

Reserved

Configuration No.
To be assigned by Aitech

Example: 2A176-220300-00

Rugged GPGPU is Aitech

Optional Accessories

MCS176-1-00	Set of Front Panel Mating Connectors
Starter Kit	• External Power Supply • J1 Power Cable • J2 I/O Cable



Development Platform

Development platforms are available as an option, which include:

- EV176 – A176 Evaluation System
- I/O Cables and Power Supply
- Software installed/configured by Aitech – latest available OS release, development tools, CUDA examples

Contact your Aitech representative for additional information



Contact Aitech

Contact your Aitech sales representative for additional product information, and for inquiries regarding customized configurations of the A176 and additional software support.



All names, products, and/or services mentioned are trademarks or registered trademarks of their respective holders.
All information contained herein is subject to change without notice.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP