ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Aitech Defense Systems A178 Thunder* at our website: *Click HERE*

A178 – Thunder

Rugged GPGPU Fanless AI Supercomputer

Aitech

Embedded Computing *without* Compromise



The A178 Thunder is the smallest and most powerful Rugged-GPGPU AI supercomputer, ideally suited for distributed systems, available with the powerful NVIDIA Jetson AGX Xavier System-on-Module.

Its Volta GPU with 512 CUDA cores and 64 Tensor cores reaches 32 TOPS INT8 and 11 TFLOPS FP16 at a remarkable level of energy efficiency, providing all the power needed for AI-based local processing right where you need it, next to your sensors. Two NVIDIA dedicated NVDLA (Deep-Learning Accelerator) engines provide a standard deep learning inference design method.

With its compact size, the A178 Thunder is the most advanced solution for AI, deep learning, and video and signal processing for the next generation of autonomous vehicles, surveillance and targeting systems, EW systems, and many other applications.

POWERED BY NVIDIA

Rugged GPGPU is Aitech


- **SWaP Optimized Rugged Supercomputer**
- **Ultra Small Form Factor**
- **NVIDIA® Jetson™ AGX Xavier System-on-Module**
  - Volta™ Architecture GPU w/512 CUDA® Cores
  - 8-Core ARM v8.2 64-bit CPU
  - 32 TOPS (Tera Operations Per Second)
  - H.264/H.265 Hardware Encoder
  - Best Available Performance per Watt – 1067 GOPS/W INT8 and 366 GFLOPS/W FP16
- **NVMe SSD**
- **Removable Micro SD Card**
- **16 GB LPDDR4x**
- **Video Capture**
  - SDI (SD/HD)
    4 channels available simultaneously
  - Composite (RS-170A [NTSC]/PAL)
    8 channels available simultaneously
- **I/O**
  - Gigabit Ethernet
  - 10G Ethernet
  - USB 3.0 & 2.0
  - Discretes
  - DVI/HDMI Out
  - DisplayPort Out
  - UART Serial
  - CANbus
- **CUDA®, OpenGL, OpenGL ES**
- **Low Power Consumption**
- **Environmentally Sealed (IP67)**



A178 – Thunder

Rugged GPGPU Fanless AI Supercomputer

Aitech
Embedded Computing *without* Compromise

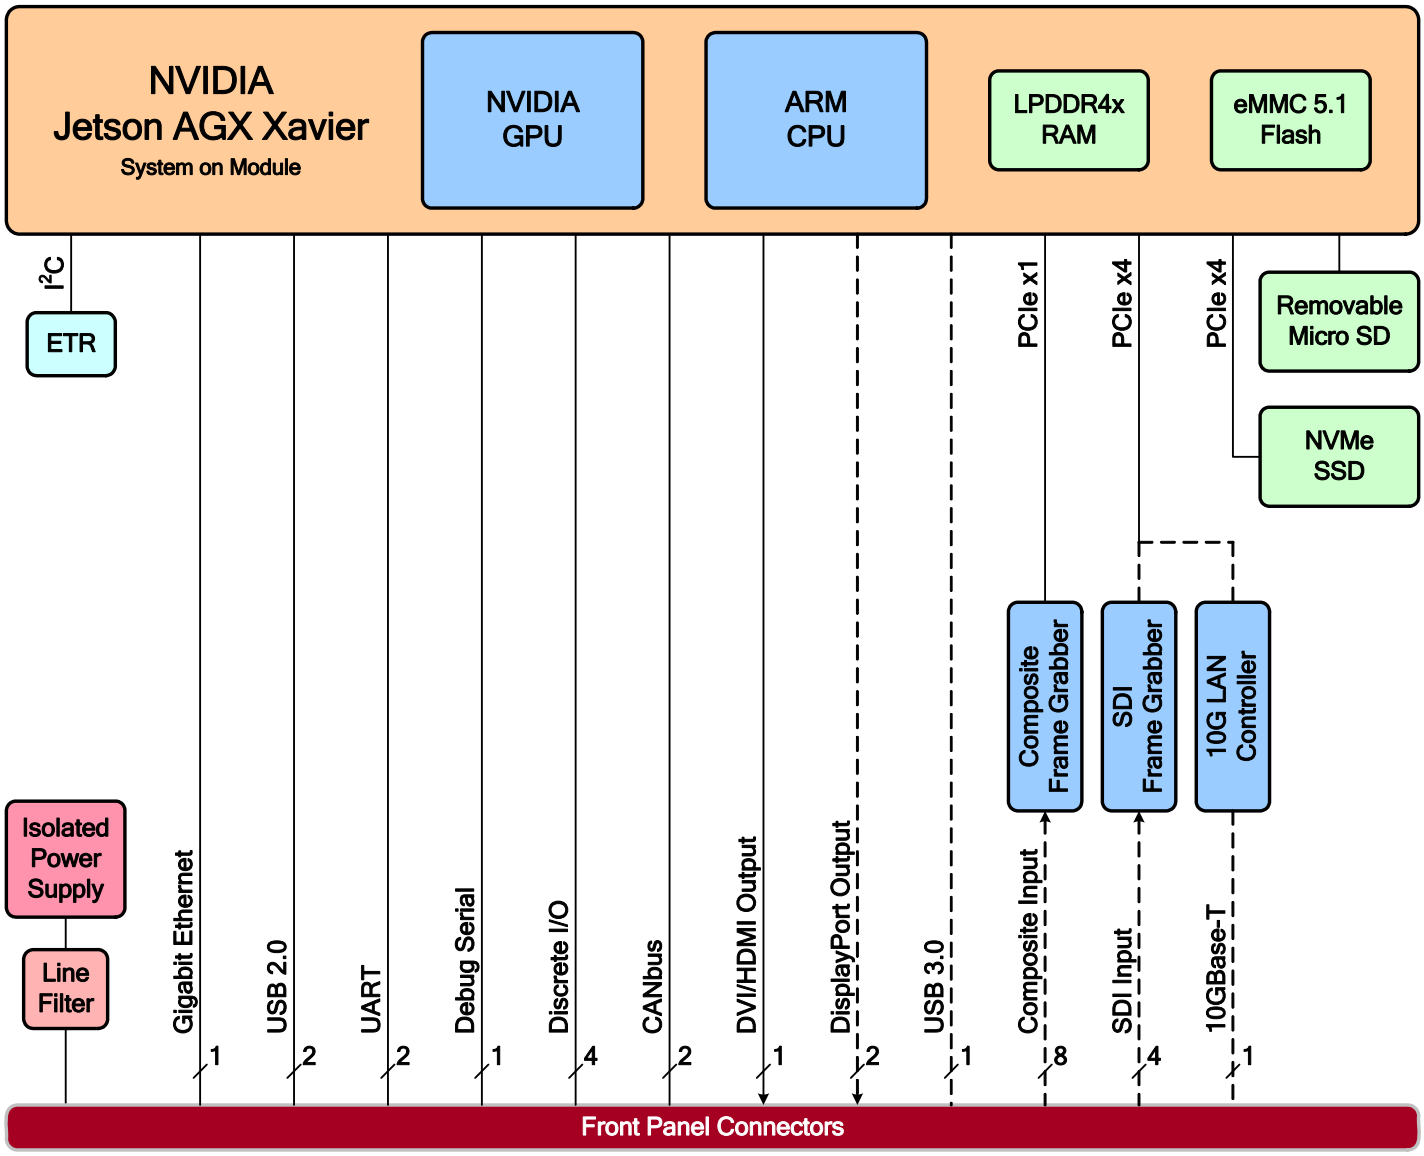

A178 – Thunder

Rugged GPGPU Fanless AI Supercomputer

Aitech
Embedded Computing *without* Compromise

System Architecture

System on Module	NVIDIA Jetson AGX Xavier
GPU	• NVIDIA Volta GPU Architecture • 512 CUDA cores • 32 TOPS INT8 (Tera Operations Per Second for Integer 8-bit) • 11 TFLOPS FP16 (Tera Floating Point Operations Per Second for FP 16-bit) • CUDA • OpenGL • OpenGL ES
CPU	ARMv8.2 (64-bit) heterogeneous multi-processing (HMP) CPU • 4 x dual-core CPU clusters (8 total NVIDIA Carmel processor cores) • 128 KB L1 instruction cache and 64 KB L1 data cache per core, 2 MB L2 cache per cluster, 4 MB L3 cache shared by all clusters • Operates at up to 2.26 GHz (depends on power mode)
Security	• HW acceleration for AES 128/192/256 encryption and decryption • HW acceleration for SHA-1, SHA-224, SHA-256, SHA-384, and SHA-512 algorithms • HW Random Number Generator (RNG) SP800-90
Expansion Options	Main board accommodates up to three optional expansion modules. Available options include: • Composite Frame Grabber • HD-SDI Frame Grabber • NVMe SSD Included I/O expansion modules are determined by system I/O Variant, see the *I/O* section below for details NVMe SSD availability is determined by options specified in *Ordering Information* (additional options may be available per customer request, contact an Aitech representative for more info)
System Resources	• Multi-standard Video/JPEG Decoder/Encoder, HW Encoding for H.264/H.265 • Dynamic voltage and frequency scaling • Temperature Sensors • Elapsed Time Recorder • Status Indicator LED

Memory Resources

RAM	16 GB LPDDR4x, operates at up to 2133 MHz (depends on power mode), 256-bit interface
eMMC	32 GB eMMC 5.1 (boot source)
NVMe SSD	Optional NVMe SSD (standard options are listed in *Ordering Information* below, additional options may be available per customer request, contact an Aitech representative for more info)
Removable Micro SD Card	Optional removable Micro SD card (standard options are listed in *Ordering Information* below, additional options may be available per customer request, contact an Aitech representative for more info)

A178 – Thunder

Rugged GPGPU Fanless AI Supercomputer

Aitech
Embedded Computing *without* Compromise

I/O

		I/O Variant			
		00	01	02	03
Expansion Card Options	**Composite Frame Grabber**	–	✓	✓	–
	SDI Frame Grabber	–	–	✓	✓
Composite Input RS-170A (NTSC)/PAL, supports simultaneous capture of all channels at full frame rates		–	8	8	–
SDI Input 480/60i, 576/50i, 720/60p, 1080/60i, 1080/30p, supports simultaneous capture of all channels at full frame rates		–	–	4	1
DisplayPort Output		–			2
USB 3.0		–			1
10G Ethernet (10GBase-T)		–			1
Gigabit Ethernet (10/100/1000Base-T)		1			
DVI (single-link) / HDMI Output		1			
USB 2.0		2			
Serial Ports (RS-232 UART)		2			
Debug Serial Console		1			
Discrete I/O (Single-Ended)		4			
CANbus		2			

Software

- Linux OS pre-installed – L4T (Linux for Tegra), a lightly modified Ubuntu-based distribution
- Video capture drivers and sample applications pre-installed, in variants equipped with optional frame grabber(s)

Mechanical

Dimensions (L x W x H)	216 mm x 82 mm x 172.5 mm [8.5" x 3.23" x 6.8"]
Weight	< 2.5 kg [5.5 lbs.]

Power

Input Power	• Wide input voltage range: 11 – 36 V_{DC} steady state operation • Input reverse polarity protection • EMI/RFI input filter • On-board supplies isolated from external supply • MIL-STD-704 and MIL-STD-1275 compliant (no hold-up)
Power Consumption	• Three main different power preset modes for the NVIDIA AGX Xavier: ▪ 10 W ▪ 15 W (default) ▪ 30 W (4 sub modes) • Users can create custom presets, specifying clocks and online cores • Total power consumption depends on system configuration and expansion options

A178 – Thunder

Rugged GPGPU Fanless AI Supercomputer

Aitech
Embedded Computing *without* Compromise

Environmental

Operating Temp.	**Min.**	-40 °C
	Max.	+55 °C
Non-Operating Temp.		-55 to +105 °C
Vibration		V2 per VITA 47
Operating Shock		OS2 per VITA 47
Altitude		-1,500 to +60,000 ft. (1)
Relative Humidity		0 – 100%
Ingress Protection		IP67 (2)
Rain		MIL-STD-810F, Method 506.4, Procedure III
Dust		MIL-STD-810F, Method 510.4, Procedure I & II
Salt Fog		MIL-STD-810F, Method 509.4
Bench Handling		MIL-STD-810F, Method 516.5, Procedure VI
Fungus		Fungus Resistant
EMI/RFI		MIL-STD-461

Notes: (1) Depending on temperature and system power dissipation
(2) With appropriate connections to system I/O and power connectors

A178 – Thunder

Rugged GPGPU Fanless AI Supercomputer

Aitech
Embedded Computing *without* Compromise

Ordering Information

Ruggedization
2 = Rugged

I/O Variant
See *I/O* table above

Reserved

A178 - [ ] [ ] [ ] [ ] [ ] 0 - [ ] [ ]

System On Module
1 = NVIDIA Jetson AGX Xavier

NVMe SSD
0 = None
7 = 1 TB

Micro SD Card
0 = None
3 = 64 GB

Configuration No.
To be assigned by Aitech

Example: 2A178-170200-00

Rugged GPGPU is Aitech

Optional Accessories

TCA178-00-SK	Starter Kit for I/O Variants 00, 01, and 02: External Power Supply, J1 Power Cable, J2 I/O Cable with Standard I/O Connectors
TCA178-00-SK-HS	Starter Kit for I/O Variant 03: External Power Supply, J1 Power Cable, J2 and J3 I/O Cables with Standard I/O Connectors
MCS178-1-00	Mating Connectors for I/O Variants 00, 01, and 02: J1 (Power) and J2 (I/O)
MCS178-3-00	Mating Connectors for I/O Variant 03: J1 (Power), J2 (I/O), and J3 (I/O)



Development Platform

Development platforms (optional) include:

- EV178 – A178 Evaluation System
- I/O Cables and Power Supply
- Software installed/configured by Aitech – latest available OS release, development tools, CUDA examples

Contact your Aitech representative for additional information



Contact Aitech

Contact your Aitech sales representative for additional product information, and for inquiries regarding customized configurations of the A178 and additional software support.



All names, products, and/or services mentioned are trademarks or registered trademarks of their respective holders.
All information contained herein is subject to change without notice.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP