ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Aitech Defense Systems C681* at our website: ***Click HERE***

C681

3U VPX Unmanaged GbE Switch

Aitech
Embedded Computing *without* Compromise



- Rugged 3U VPX Single-Slot Unmanaged Gigabit Ethernet Switch
- Multiple Port Configuration Options
  - Up to 10 Ports
  - 1000Base-BX/KX and 1000Base-T Port Options
  - Front Panel 1000Base-T Port in Air-Cooled Version
- Unmanaged, No User Configuration Required
- Full Wire-Speed Non-Blocking Forwarding
- Conduction and Air-Cooled Versions
- 2LM Option per VITA 48.2
- Vibration and Shock Resistant



C681

3U VPX Unmanaged GbE Switch


Aitech
Embedded Computing *without* Compromise

Aitech's C681 is a high-performance 3U VPX Unmanaged Gigabit Ethernet Switch for embedded and harsh environment applications.

Gigabit Ethernet switching is performed by the Marvell Prestera® 98DX106. The switch is unmanaged and does not require any user configuration.

The C681 is available in factory configured variants which offer different Ethernet port configuration options (1000Base-T or 1000Base-BX/KX).

1000Base-BX/KX ports support both backplane applications and external SFP modules. 1000Base-T ports support 10/100/1000 Mbps operation and are implemented with Marvell 88E1340 PHY devices and on-board magnetics modules.

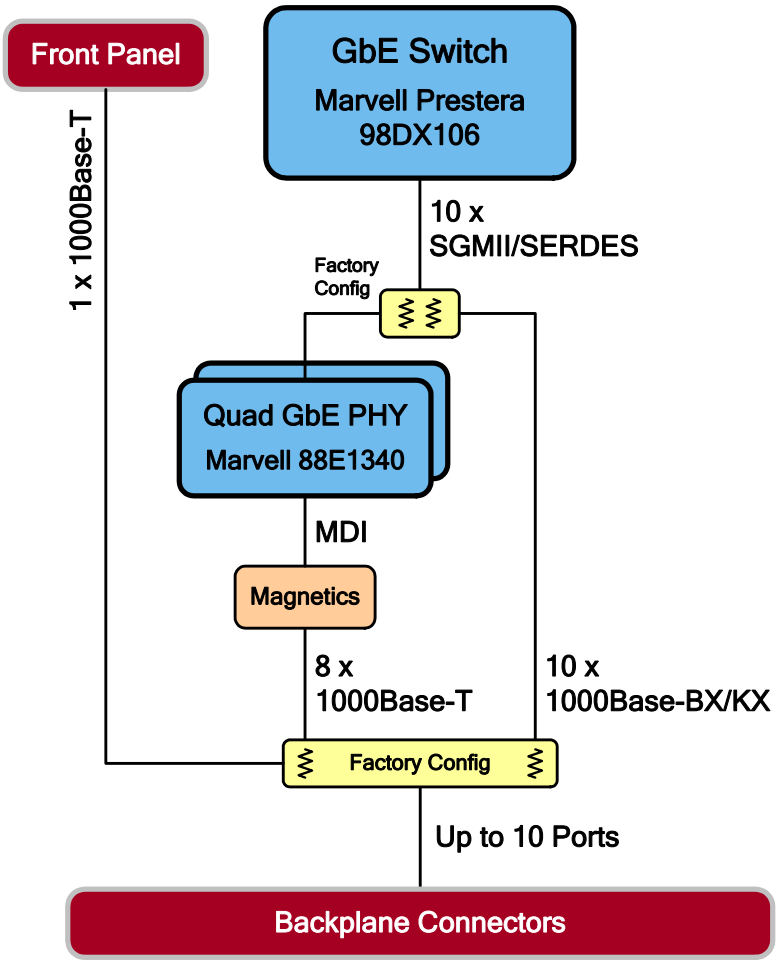

I/O

I/O Variant (1)	Cooling	Backplane I/O		Front Panel I/O
		1000Base-BX/KX	1000Base-T	1000Base-T
1	Conduction	10	–	–
	Air	9	–	1
2	Conduction	–	8	–
	Air	–	7	1

Notes: (1) C681 I/O Variants offer different Ethernet port interfaces/quantities via factory configuration (options are specified when ordering the C681 and are not user configurable); additional Ethernet port configuration options may be available per customer request, contact an Aitech representative for more information

C681

3U VPX Unmanaged GbE Switch

Aitech
Embedded Computing *without* Compromise

Ethernet Switch Features

- Marvell Prestera® 98DX106 Ethernet switch device
- Unmanaged, no user configuration required
- Full wire-speed non-blocking forwarding
- Jumbo Frame support (up to 9 kB)
- 1 Mbit on-chip buffer memory
- 8k entries forwarding database
- Base-T auto-negotiation and auto cross-over (MDI/MDI-X)
- Full and half-duplex operation
- Port Status Indicator LEDs
- Additional Features available by Factory Configuration (contact an Aitech representative for information)
  - 802.1Q VLAN
  - Mirroring
  - QoS
  - Loopback
- OpenVPX/VITA 65 Slot Profiles (partially supported, compatible mapping of available ports/interfaces)
  - SLT3-SWH-2F24U (Variant 1)
    9-10 x Ultra-Thin Pipes (1000Base-BX/KX ports)
  - SLT3-SWH-2F12T (Variant 2)
    7-8 x Thin Pipes (1000Base-T ports)

Front Panel (1)

I/O	One 1000Base-T port via RJ45 connector
Pushbuttons	Reset pushbutton
Indicator LEDs	Board status, power supply status, and Ethernet port link status

Notes: (1) Included only in air-cooled versions of the C681

Mechanical

	Form Factor & Dimensions (1)	Weight
Air-Cooled	3U VPX REDI per ANSI/VITA 48.1	< 470 g (1.04 lbs)
Conduction-Cooled	3U VPX REDI per ANSI/VITA 48.2	< 380 g (0.84 lbs)
Conduction-Cooled 2LM	3U VPX REDI 2LM (Two Level Maintenance) per ANSI/VITA 48.2	< 530 g (1.17 lbs)

Notes: (1) See *Ordering Information* below for available pitches

Power

+5 V	Total (1, 2)
1.2 A	6 W

Notes: (1) C681 is powered by the +5V backplane power supply (+12V, +3.3V, +3.3V_AUX, and ±12V_AUX are not required)
(2) Total power consumption with all Ethernet ports active

Environmental

Specs per VITA 47	Air-Cooled			Conduction-Cooled	
	Commercial	**Rugged**	**Military**	**Rugged**	**Military**
Operating Temp.	AC1 (0 to +55 °C) (2)	AC3 (-40 to +70 °C) (2)	AC4 (-40 to +85 °C) (1,2)	CC3 (-40 to +70 °C) (3)	CC4 (-40 to +85 °C) (1,3)
Non-Operating Temp.	C1 (-40 to +85 °C)	C3 (-50 to +100 °C)	C4 (-55 to +125 °C)	C3 (-50 to +100 °C)	C4 (-55 to +125 °C)
Vibration	V1	V2	V2	V3	V3
Operating Shock	OS1	OS1	OS1	OS2	OS2
Altitude	15,000 ft.	35,000 ft.	70,000 ft.	35,000 ft.	70,000 ft.
Relative Humidity (4)	0 - 90%	0 - 100%			
Conformal Coating	N/A	Acrylic (Silicone and Urethane Optional)			


Notes: (1) -55 °C available, contact an Aitech representative for more information
(2) Operating ambient air temperature (with sufficient airflow)
(3) Operating card edge temperature
(4) Non-condensing

C681

3U VPX Unmanaged GbE Switch

Aitech
Embedded Computing *without* Compromise

Ordering Information

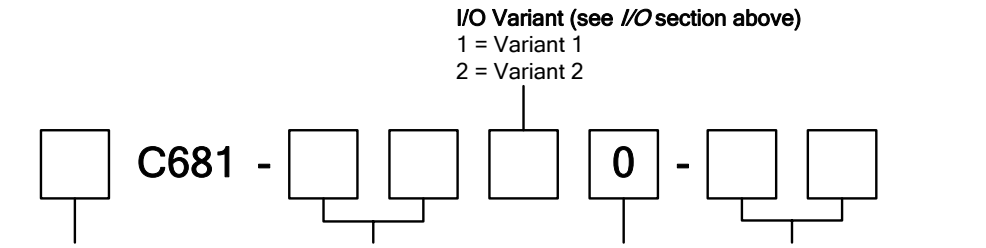

* Compatible also with 1" pitch enclosures and backplanes

Example: 4C681-R020-00

Contact Aitech

Contact your Aitech sales representative for additional product information, and for inquiries regarding customized configurations of the C681 and additional software support.



All names, products, and/or services mentioned are trademarks or registered trademarks of their respective holders.
All information contained herein is subject to change without notice.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP