ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Aitech Defense Systems S710* at our website: ***Click HERE***


S710

Radiation Tolerant Communication PMC

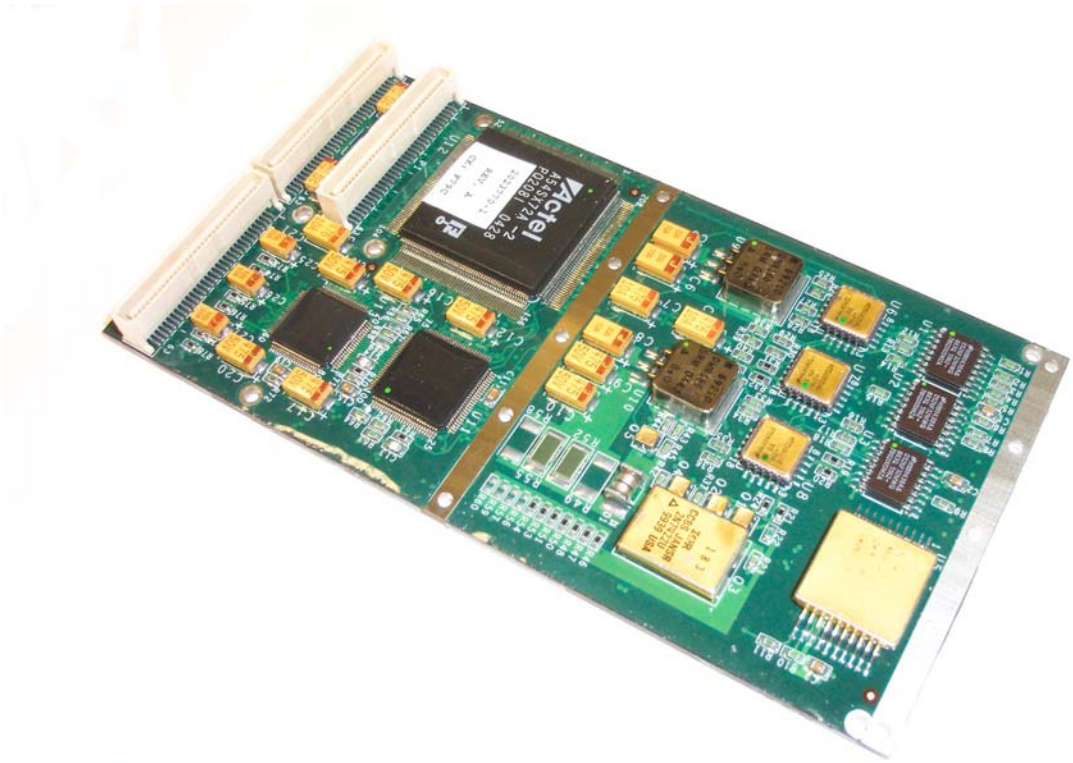

- **Designed for LEO, Mars Terrestrial with an Option for GEO Environments**
- **One IEEE-1394a FireWire OHCI controller and Three 400Mbps FireWire ports with power management circuitry**
- **12 RS-422 Input and 12 RS-422 Output channels can be configured to NRZ-L, NRZ-M and BiPhase-L Modes**
- **FPGA Control Logic for a variety of spacecraft standard or custom data interfaces**
- **Triple-Voted algorithm is provided for input and output data buffer**
- **Software Configurable Interrupt capability to indicate Completion of Pre-defined Tasks**
- **IEEE 1101.2 (conduction cooled) for both engineering unit and flight unit**
- **32-bit PCI 2.1 compliant cPCI interface at 33.333 MHz**
- **Full-Featured 1394 Software Library is available for VxWorks**
- **S710 nominal power consumption is less than 3.5 Watts**
- **Level-2 Components per NASA GSFC 311-INST-001A specification are available**

Aitech Defense Systems Inc.
A member of the Ai-Rugged Group
9301 Oakdale Ave, Chatsworth, Ca 91311
Tel: (888) AITECH-8 (888-248-3248) Fax: (818) 350-6888 e-mail: sales@rugged.com web: www.rugged.com

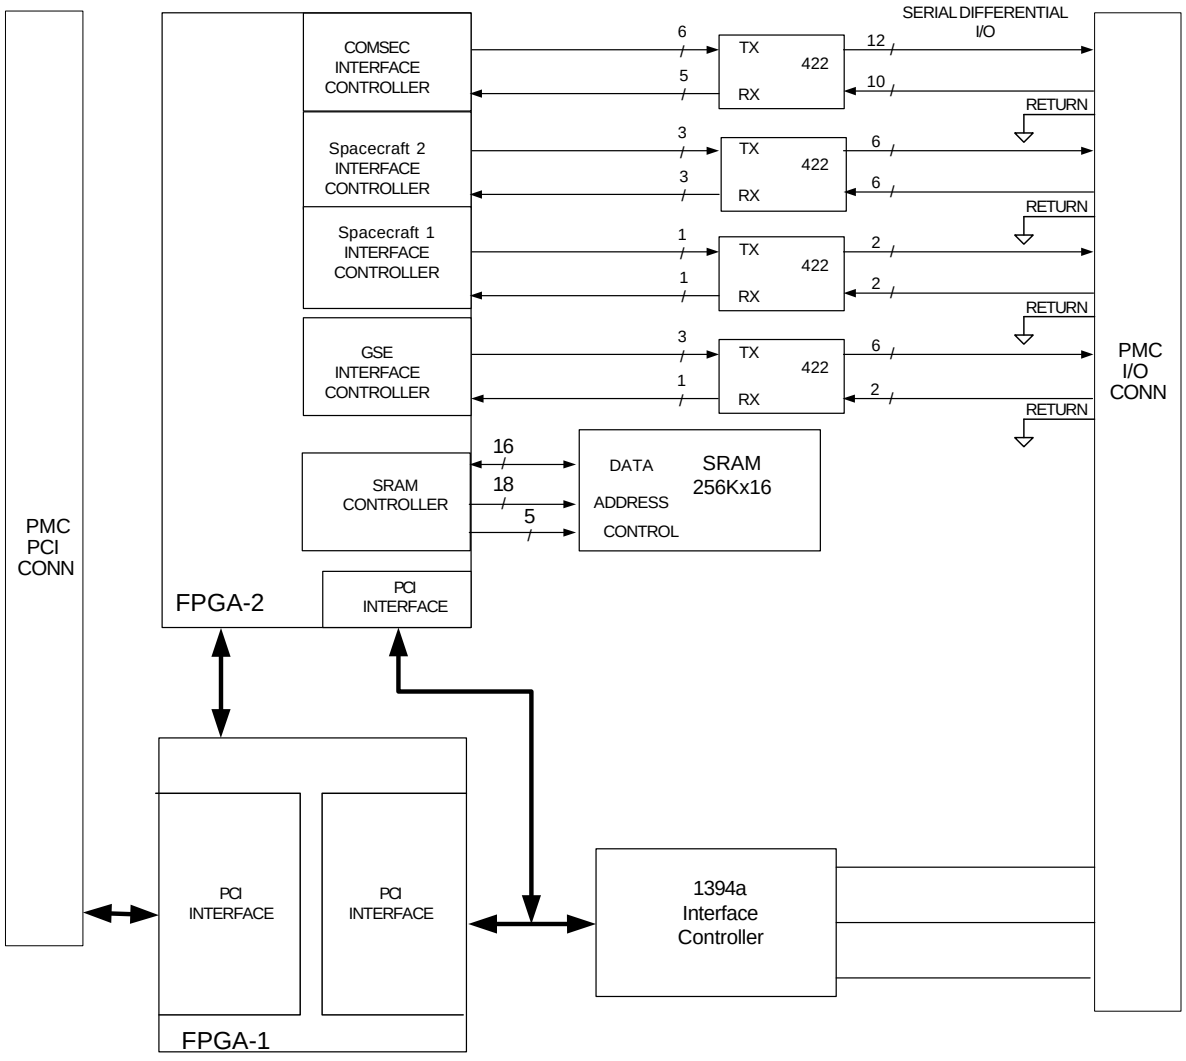

S710 Radiation Tolerant Communication PMC

Aitech's S710 Communication PMC features RS-422 differential Inputs and RS-422 differential Outputs with onboard FPGA logic to interface to the external spacecraft sensors and devices. The incoming data is parsed and stored in a ring buffer or dual buffer modes with a triple-voted mechanism to mitigate single event upset to the on board memory buffer. The S710 also provides for an IEEE-1394a communications interface with 3 physical ports. The FireWire ports are designed to provide DMA capability to local PCI memory. The S710 is a singlewide conduction-cooled PCI mezzanine card (PMC) with a 33.333 MHz 32-bit PCI interface.

Mechanical Features

The S710 is available in a conduction cooled form factor per ANSI/VITA20-2001 for installation on top of an IEEE 1101.2 conduction-cooled carrier boards

Dimensions

All versions are offered in a conduction-cooled form factor per ANSI/VITA 20-2001 standard.

Radiation Performance

- Radiation Tolerant with a minimum unshielded Total Ionization Dose (TID) of greater than 10 krad (Si). Higher TID tolerance can be available upon request.
- Latch-up Immune with a high LET of 37 MeV•cm^2/mg
- Low SEU Rate – less than 1 upset per 25 years of operation at ISS orbit

Power Requirements

The S710 draws its power +5.0V and +3.3V (VIO inputs) from the standard PMC interface. It then generates its own power on board (+2.5V).

S710 typical power consumption is less than 3.5 Watts. The S710 power consumption is estimated as follows:

+3.3V	(+-5%)	0.51A (typical)
+5V	(±5%)	0.36A (typical)

Note: The power consumption does not account for power drawn by external 1394 device(s).


Environmental Features

Please refer to Aitech Ruggedization Datasheet:

http://www.rugged.com/home/rugged.html

Ordering Information

Ordering Information for the S710

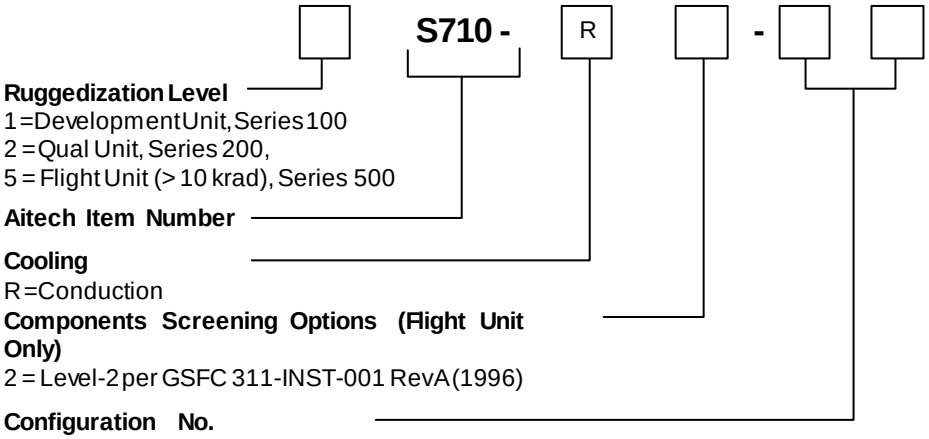

Available Configurations are: 1S710-R, 2S710-R, 5S710-R2

For more information about the S710 or any Aitech product, please contact Aitech Defense Systems sales department at (888) AITECH-8 (888-248-3248).

All names, products, and/or services mentioned are trademarks or registered trademarks of their respective holders.
All information contained herein is subject to change without notice.

Aitech Defense Systems Inc.
A member of the Ai-Rugged Group
9301 Oakdale Ave, Chatsworth, Ca 91311
Tel: (888) AITECH-8 (888-248-3248) Fax: (818) 350-6888 e-mail: sales@rugged.com web: www.rugged.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP