ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Alphi Technology PCie-Mini-CAN-USB* at our website: *Click HERE*

PCIe-Mini -IO Controller – USB 2.0

Multi purpose communications applications- Protocol Converter

Features

CAN Bus:

- High Speed CAN interface according to ISO 11898-2
- Time-stamped CAN messages
- Supports 11-bit (CAN 2.0A) and 29-bit (CAN 2.0B active) identifiers
- Bit rates" 10 to 1000 kbps
- Reliable error handling
- Low Power consumption
- NEMA Compliance
- Isolated CAN Channels

USB interface:

- Fully compliant with USB 2.0 spec.
- Supports Control, Bulk, interrupt and Isochronous endpoints
- Endpoint Maximum packet size selection by software
- Supports DMA transfers with the DMA RAM of 16KB
    - USB host controller
- OHCI compliant
- Two downstream ports


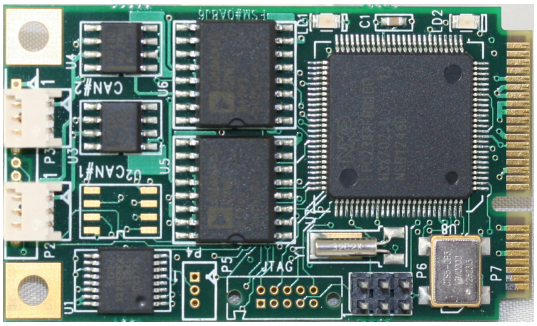


Fig.1

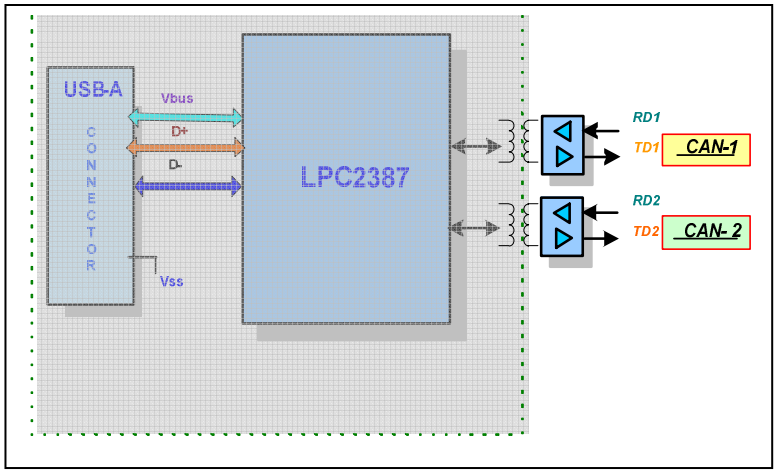

Block Diagram

Block Diagram and Operational Overview

The **PCIe-Mini -CAN** board is engineered around the NXP LPC2387 microcontroller. This highly integrated 32 bits microcontroller based on the ARM7TDMI-S processor, has a very low power consumption and features 512 kB of on-chip high-speed flash memory. It incorporates several communications ports, specifically a USB full-speed Device/Host/OTG Controller with 4 kB of endpoint RAM, and two Controller Area Network (CAN) channels.

The device controller enables 12 Mbit/s data exchange with a USB host controller. It consists of a register interface, serial interface engine, endpoint buffer memory, and a DMA controller. The serial interface engine decodes the USB data stream and writes data to the appropriate endpoint buffer. The status of a completed USB transfer or error condition is indicated via status registers.

An interrupt is also generated if enabled. When enabled, the DMA controller transfers data between the endpoint buffer and the USB RAM.

The Controller Area Network (CAN) is a serial communications protocol which efficiently supports distributed real-time control with a very high level of security. Its domain of application ranges from high-speed networks to low cost multiplex wiring.

Copyright 2008
Alphi Technology Corporation,1898 Southern Avenue, Tempe, Arizona 85282
Telephone: 480.838.2428 Fax: 480.838.4477
Contact Email: engineering@alphitech.com Visit: www.alphitech.com

PCIe-Mini-CAN-USB

Applications:
This board is optimally suited for communications gateway and protocol coveters. This is a perfect solution for:

- Avionics equipment
- Avionic data communication systems
- Medical systems
- Industrial controls
- Others

Software Support:

LPC2387 Device Specifications:

• Fully compliant with USB 2.0 Specification (full speed).
• Supports 32 physical (16 logical) endpoints with a 4 kB endpoint buffer RAM.
• Supports Control, Bulk, Interrupt and Isochronous endpoints.
• Scalable realization of endpoints at run time.
• Endpoint Maximum packet size selection (up to USB maximum specification) by software at run time.
• Supports SoftConnect and GoodLink features.
• While USB is in the Suspend mode, the LPC2387 can enter one of the reduced power modes and wake up on USB activity.
• Supports DMA transfers with the DMA RAM of 16 kB on all non-control endpoints.
• Allows dynamic switching between CPU-controlled and DMA modes.
• Double buffer implementation for Bulk and Isochronous endpoints.
• Two CAN controllers and buses.
• Data rates to 1 Mbit/s on each bus.
• 32-bit register and RAM access.
• Compatible with CAN specification 2.0B, ISO 11898-1.
• Global Acceptance Filter recognizes 11-bit and 29-bit receive identifiers for all CAN buses.
• Acceptance Filter can provide FullCAN-style automatic reception for selected Standard Identifiers.
• FullCAN messages can generate interrupts.

Mechanical: Environmental:

- Size – Mini PCIe Module
  30 mm x 50.95mm
- Power – T.B.D.
- Front panel I/O
- Vibration – 0.5G, 20-2000 Hz rand
- Shock – 20G, 11 msec, ½ sine
- Weight – tbd
- MTBF – >250,000 hours

Operating Environment:

- Operating temperature
  Industrial: -40 ºC to +85 ºC
- Non-operating: -60 ºC to +120 ºC
- Humidity – 5 to 90% (non-cond)
- Altitude – 0 to 10,000 feet

Ordering Information:

Part number: **PCIe-Mini–CAN:** CAN Bus and USB interface on Mini PCIe
Industrial Temp: -40 to +85 C

PCIe-Mini–CAN-N: *ROHS Compliant*
Industrial Temp: -40 to +85 C

Optional Accessories

Part number: **CBL-Mini-CAN-12** CAN Cable, 12 Inch Micro to DB9

Copyright 2008
Alphi Technology Corporation,1898 Southern Avenue, Tempe, Arizona 85282
Telephone: 480.838.2428 Fax: 480.838.4477
Contact Email: engineering@alphitech.com Visit: www.alphitech.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP