ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.


Find the *Ametek / Elgar / Sorensen DCR55-180T* at our website: *Click HERE*

5kW and 10kW Three Phase Programmable Power Supplies DCR-T Series


DCR-T Series 5 and 10 kW high power programmable power supplies are specifically designed to meet today's requirement for the high power burn-in market. The DCR-T Series provides EMI-protected AC line, 0.1% line and load regulation (typical), and features full remote control, full remote monitoring, OVP shutdown, phase loss, and thermal shutdown. Digital meters are standard. All features are available under remote control or remote readback.

- 19 models, 0-4 to 0-600 Vdc and 8 to 800 Adc, thyrister-controlled and dc regulated
- 208 Vac, 60 Hz, 3 phase input (5 kW units); 480 Vac, 60 Hz, 3 phase input (10 kW units). Optional inputs available
- Automatic V/I crossover with indicators
- Remote control functions, i.e., V/I, OVP shutdown; external meter/indicator drive
- No programming resistors in contact with output, avoids hi-voltage problems with programming components
- EMI protection on ac line
- OVP shutdown standard
- 0.1% line and load regulation (typical)
- 30-150 mV RMS ripple (model dependent)
- 40 ms transient response—50% change (typical)
- Rear panel connector features: ac control, shutdown, voltage set, current set, OVP set, local/remote I meter, remote E meter, OVP indication, thermal/phase indication, remote sense
- SCR crowbar (Option M5)
- IEEE-488 Interface: talk/listen with V/I readback and adjustable OVP – external chassis for 5 kW units; Option M9A for 10 kW units
- 5 year warranty

Sophisticated Controls For High Power Burn-In

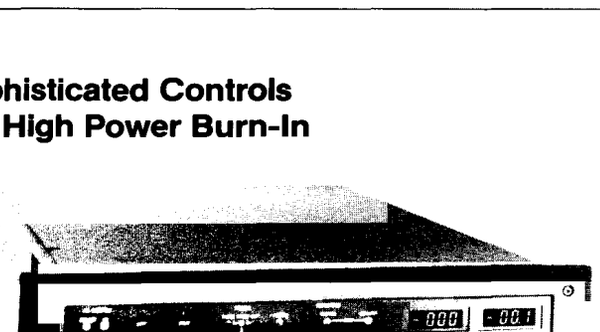

5 kW Model

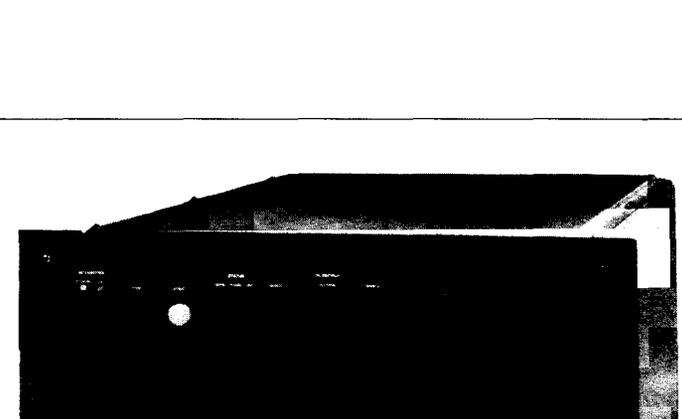

10 kW Model

SORENSEN 9250 Brown Deer Road, San Diego, CA 92121 ■ 1-800-525-2024 ■ 619-450-0085 ■ FAX 619-458-0237

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

DCR-T Series Specifications

DC OUTPUT

CONSTANT VOLTAGE MODE

Voltage Regulation:
Line and load combined:
All models 0.1% of the voltage setting or specification in table, whichever is greater.

Temperature Coefficient:
0.02%/°C of E_0 max.

Voltage Programming:
100 mV per 1% of rated output. (0-10V for 0-100% of rated output.)

Resistive Programming:
100Ω per 1% of rated output. (0-10 kΩ for 0-100% of rated output.)

Stability:
0.1% E_0 max. for 8 hours after 30 minute warm up with fixed line, load and temperature.

Remote sense:
3 to 10V max. drop, + line. 0.75V max. drop, - line.

Transient Response:
40 ms (typical) to return to ± 1% band for a step load change of 50% to 100% or 100% to 50% of full load.

CONSTANT CURRENT MODE

Current Regulation:
Line and load combined:
All models 0.1% I_0 max. of the output current setting or specification in table, whichever is greater.

Temperature Coefficient:
0.04%/°C of I_0 max.

Current Programming:
100 mV per 1% of rated output. (0-10V for 0-100% of rated output.)

Resistive Programming:
100Ω per 1% of rated output. (0-10 kΩ for 0-100% of rated load.)

Stability:
0.2% I_0 max. for 8 hours after 30 minute warm up with fixed line, load and temperature.

INPUT

Voltage:
480 Vac ± 10%, 60 Hz, three-phase, 10 kW models. 208 Vac ± 10%, 60 Hz, three-phase, 5 kW models.

Voltage Options:
See chart on the next page.

Frequency:
60 Hz all models. 50 Hz available as an option.

OPERATING DATA

Efficiency:
58%-67% of full rated output, depending on model.

Series Operation:
200 Vdc maximum; consult Sorensen for series operation of more than 2 units.

Parallel Operation:
Direct paralleling of any number of units.

Overvoltage Protection:
Standard.

Ambient Operating Temperature Range:
0 to + 70°C.

Storage Temperature Range:
–45°C to +85°C

Cooling:
Forced air.

Model[4]	Output Power				Constant Voltage Mode					Temp. Coeff., Voltage mV/°C	Voltage Drift, % E_0 Max. (Typ.)	Programming Constants Voltage Mode	
	Voltage (Vdc)	Current (Adc)			Regulation Line and Load mV[1]	Ripple (PARD)		Resolution	Transient Response Time ms (Typ.)				
		50°C	60°C	70°C		mV RMS	mV p-p					Ohms/V	V/V
DCR 4-800T*	0-4	800	680	440	2-4	30	100	.025%	40	1.0	.05	2500	2.5
DCR 8-400T*	0-8	400	340	220	4-8	30	100	.025%	40	2.0	.05	1250	1.25
DCR 16-310T*	0-16	310	266	188	8-16	30	100	.025%	40	3.2	.05	625	.625
DCR 16-625T**	0-16	625	531	375	8-16	30	100	.025%	40	3.2	.05	625	.625
DCR 32-155T*	0-32	155	132	93	16-32	20	120	.025%	40	6.4	.05	313	.312
DCR 32-310T**	0-32	310	264	186	16-32	20	120	.025%	40	6.4	.05	313	.312
DCR 40-300T**	0-40	300	255	178	20-40	20	120	.025%	40	6.4	.05	250	.25
DCR 55-90T*	0-55	90	74	54	27-55	20	120	.025%	40	11.0	.05	182	.18
DCR 55-180T**	0-55	180	153	108	27-55	20	120	.025%	40	11.0	.05	182	.18
DCR 80-62T*	0-80	62	54	37	40-80	20	120	.025%	40	16.0	.05	125	.125
DCR 80-125T**	0-80	125	106	75	40-80	20	120	.025%	40	16.0	.05	125	.125
DCR 110-45T*	0-110	45	38	27	55-110	40	140	.025%	40	22.0	.05	91	.09
DCR 110-90T**	0-110	90	77	54	55-110	40	140	.025%	40	22.0	.05	91	.09
DCR 160-30T*	0-160	30	27	18	80-160	60	180	.025%	40	32.0	.05	63	.063
DCR 160-62T**	0-160	62	53	37	80-160	60	180	.025%	40	32.0	.05	63	.063
DCR 300-16T*	0-300	16	14	10	150-300	100	300	.025%	40	60.0	.05	33	.033
DCR 300-33T**	0-300	33	28	20	150-300	100	300	.025%	40	60.0	.05	33	.033
DCR 600-8T*	0-600	8	7	4.8	300-600	150	600	.025%	40	120.0	.05	17	.0167
DCR 600-16T**	0-600	16	14	9.6	300-600	150	600	.025%	40	120.0	.05	17	.0167

*Refer to the voltage option chart on the next page. **Refer to the voltage option chart on the next page.
NOTES: 1. Regulation range as stated 0.1% of voltage or current, or stated range, whichever is greater. **2.** Line current at min. line voltage. **3.** Efficiency taken at max. power out and nominal ac volts input. **4.** Part no. requires suffix (T1, T2 etc.) to specify ac power input option. See "VOLTAGE OPTIONS" table on page 23.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

DCR-T Series Specifications

DCR-T ACCESSORIES

Chassis Slide Kit:
Part No. 1060247-1

OPTIONS

M5: SCR Crowbar

External IEEE Interface Chassis for 5 kW units: See Parallel Interface Controller (below).

M9A Internal IEEE Interface for 10 kW units: Features 14-bit resolution of programming and readback of voltage and current. The built-in DVM and current shunt measures the actual power supply output, providing accurate 12-bit readback. See pages 46-48 for more information.

VOLTAGE OPTIONS

Specifying Note: Select ac input voltage option below, and add as a part no. suffix to specify power suppliers.

$250 per option. N/C for option T1 on 5 kW. N/C for option T5 on 10 kW.


* **T1**—208 Vac. 60 Hz (N/C) **T4**—440 Vac. 60 Hz **T8**-220 Vac, 60 Hz
T2—380 Vac. 50 Hz ** **T5**—480 Vac. 60 Hz (standard) **T9**—208 Vac, 50 Hz
T3—415 Vac. 50 Hz **T6**—575 Vac. 60 Hz **T10**—230 Vac, 60 Hz
T11—200Vac, 50 Hz

EXAMPLE: DCR 16-625 T5 M9A

- M9A — INTERNAL IEEE INTERFACE
- T5 — INPUT
- DCR 16-625 — POWER SUPPLY

*Standard on 5 kW units (no charge) **Standard on 10 kW units (no charge)

Parallel Interface Controller (PIC)
A versatile new Parallel Interface Controller (PIC) provides central control and monitoring of up to four DCR-Ts operating in parallel. Centralized control eliminates the need to individually adjust each power supply or to add up the readings of each power supply output. Many operating configurations are possible, i.e., manual panel control, remote voltage or resistance programming, use with an IEEE-488 programmer, and others.

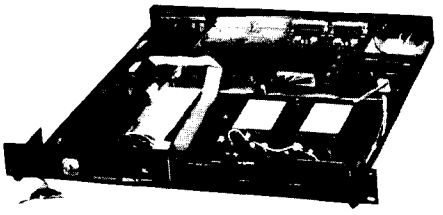

PIC Models


PIC 2: Controls two DCR-Ts
PIC 3: Controls three DCR-Ts
PIC 4: Controls four DCR-Ts
PIC 1-M9A (for 5 kW units only): A PIC with an M9A IEEE-488 interface
PIC 2-M9A: Controls two DCR-Ts with an M9A IEEE-488 interface
PIC 3-M9A: Controls three DCR-Ts with an M9A IEEE-488 interface
PIC 4-M9A: Controls four DCR-Ts with an M9A IEEE-488 interface

Model[4]	Constant Current Mode			Temp Coeff., Current mA/°C (Typ.)	Current Drift (Typ.) % I_0 Max.	Programming Constants Current Mode		Power Factor (Typ.)		Efficiency[3] %	Case Size	Output Power kW
	Regulation mA[1]	Ripple (PARD) mA RMS	Resolution (Typ.)			Ohms/A	V/A	Lead	Lag			
DCR 4-800T*	400-900	3000	.025%	320	.05	12.5	0.0125	.9	.2	50	II	5
DCR 8-400T*	200-450	3000	.025%	200	.05	25.0	0.025	.9	.2	48	II	5
DCR 16-310T*	155-310	1500	.025%	200	.05	32.0	0.032	.9	.2	58	II	5
DCR 16-625T**	312-625	2000	.025%	250	.05	16.0	0.016	.9	.2	60	III	10
DCR 32-155T*	80-155	1000	.025%	100	.05	64.0	0.065	.9	.2	59	II	5
DCR 32-310T**	155-310	1500	.025%	124	.05	32.0	0.032	.9	.2	61	III	10
DCR 40-300T**	150-300	1500	.025%	124	.05	33.0	0.033	.9	.2	61	III	12
DCR 55-90T*	48-90	600	.025%	58	.05	111.0	0.111	.9	.2	61	II	5
DCR 55-180T**	90-180	900	.025%	72	.05	56.0	0.056	.9	.2	63	III	10
DCR 80-62T*	30-62	600	.025%	40	.05	161.0	0.161	.9	.2	62	II	5
DCR 80-125T**	62-125	900	.025%	50	.05	80.0	0.080	.9	.2	64	III	10
DCR 110-45T*	22-45	500	.025%	29	.05	222.0	0.222	.9	.2	63	II	5
DCR 110-90T**	45-90	800	.025%	36	.05	111.0	0.111	.9	.2	65	III	10
DCR 160-30T*	15-30	330	.025%	20	.05	333.0	0.333	.9	.2	64	II	5
DCR 160-62T**	31-62	480	.025%	25	.05	161.0	0.161	.9	.2	66	III	10
DCR 300-16T*	8-16	200	.025%	10	.05	625.0	0.625	.9	.2	65	II	5
DCR 300-33T**	16-33	240	.025%	13	.05	303.0	0.303	.9	.2	67	III	10
DCR 600-8T*	4-8	100	.025%	5	.05	1250.0	1.25	.9	.2	65	II	5
DCR 600-16T**	8-16	120	.025%	6	.05	625.0	0.625	.9	.2	67	III	10


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

DCR-T Series
Dimensional Drawings


CASE II (8¾" High) Fan Cooled

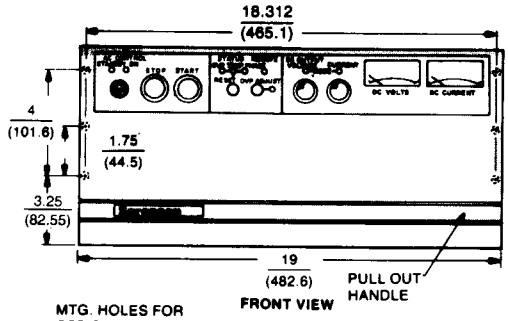


ALL MODELS EXCEPT DCR 4-800T

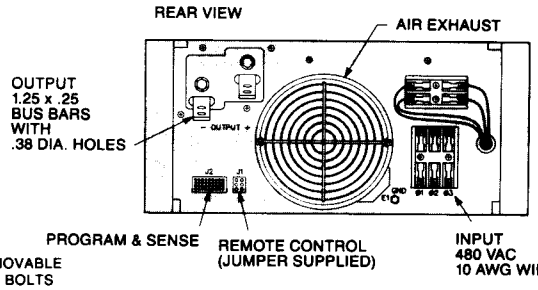


PARTIAL VIEW DCR 4-800T ONLY



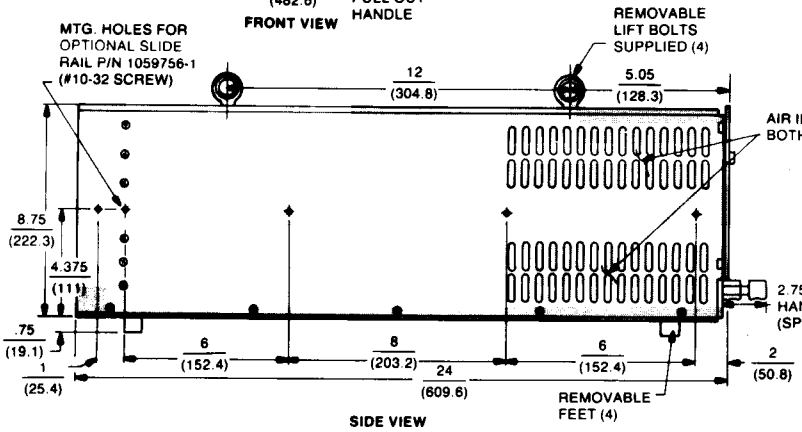



NOTE AC INPUT CONNECTIONS SHOWN WITH PROTECTIVE COVER REMOVED.




CASE SIZE	DIMENSIONS In. (mm)			WEIGHT lb (kg)
	Height	Width	Length	
II	8.75 (222.3)	19 (492.6)	24 (609.6)	185 (84)
III	12.25 (311.2)	19 (482.6)	24 (609.6)	310 (141)

CASE III (12-1/4 In. High) Fan Cooled

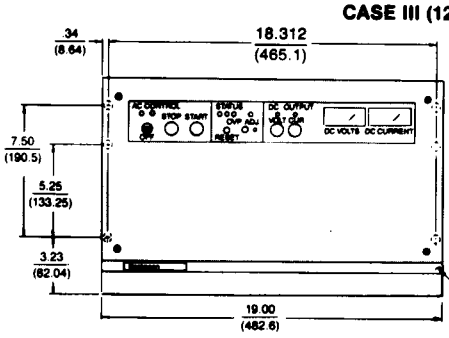

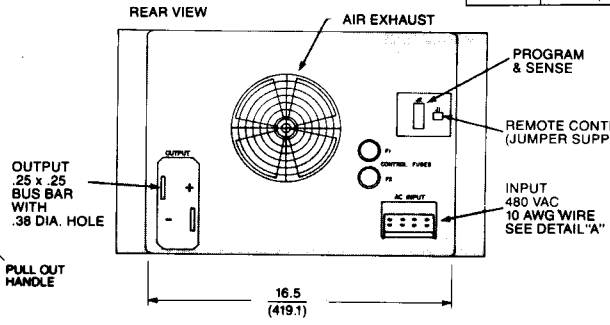

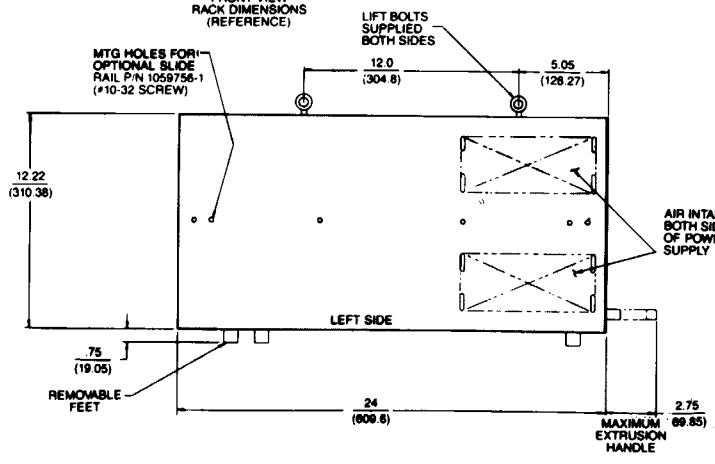

NOTE

AC INPUT CONNECTIONS SHOWN WITH PROTECTIVE COVER REMOVED.

J2 PROGRAM AND SENSE	-1	NC
	-2	LOGIC GND
	-3	RESET
	-4	OVP IND
	-5	THERMAL IND
	-6	PHASE IND
	-7	OPERATOR REMOTE IND
	-8	REMOTE/LOCAL
	-9	(+) OUTPUT
	-10	(–) OUTPUT
	-11	VIRTUAL GND
	-12	REMOTE OVP SET
	-13	REMOTE CURRENT SET
	-14	REMOTE VOLTAGE SET
	-15	SHUTDOWN
	-16	REMOTE VOLTAGE MTR
	-17	REMOTE AMP MTR
	-18	MODE PLS
	-19	MODE DRIVE
	-20	MODE IND
	-21	SENSE (+)
	-22	SENSE (–)
J1 REMOTE AC CONTROL	-1	COM
	-2	STOP
	-3	START

Note: All dimensions are in inches (mm)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP