



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗


LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

Tunable Laser Source AQ4321 A/4321 D

A high-precision tunable laser source
for evaluation of DWDM systems and components

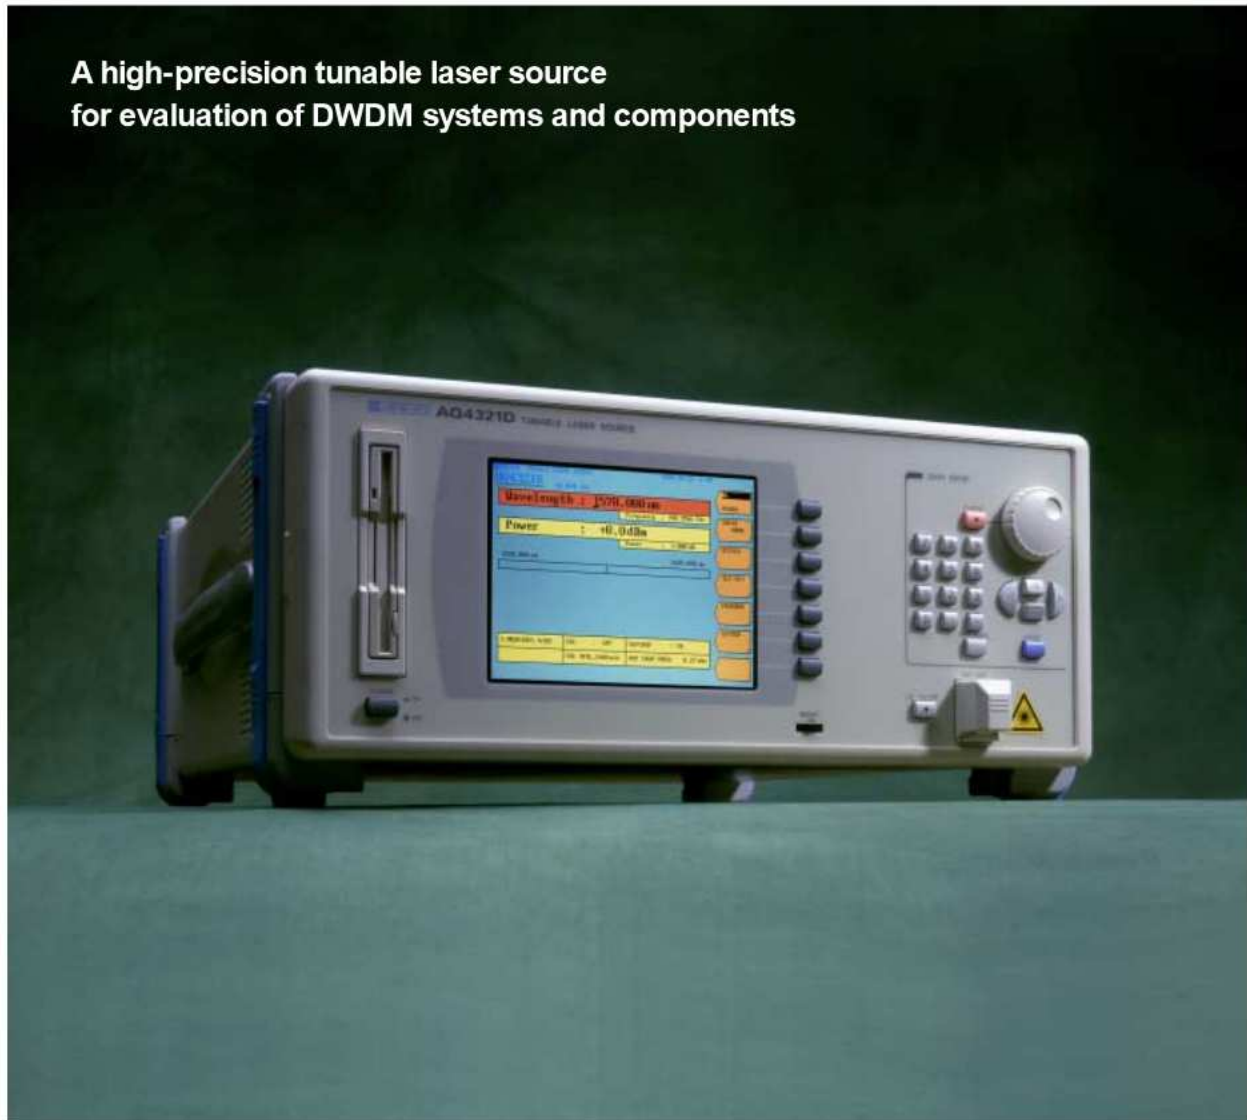

A high-precision tunable laser source for evaluation of DWDM systems and components

The AQ4321A/4321D Tunable Laser Source is specially designed for DWDM applications, especially for the evaluation of optical components and DWDM systems. These tunable laser sources provide wide wavelength tuning range with great accuracy (± 10 pm at 1520 nm). High output power, high SMSR and stability are excellent for the complete characterization of optical components.



Features

High wavelength accuracy: ± 10 pm (at 1520 nm)

Accurately measures spectral characteristics of AWG, FBG, DWDM filters, etc.

High optical output with +10 dBm (typ.) (AQ4321A)

Ideal for the evaluation of optical amplifiers and DWDM transmission systems.

Continuous sweep

Achieve continuous wavelength tuning by applying Ando's unique external resonant structure.

Wavelength range: 1480 to 1580 nm (AQ4321A) 1520 to 1620 nm (AQ4321D)

Side mode suppression ratio: 60 dB (typ.)


Wavelength calibration function

An absolute wavelength calibration function, using an internal gas cell absorption line is integrated into these TLSs. This calibration function provides high-accuracy, reliable measurements on DWDM components thanks to Ando's automatic wavelength calibration at set intervals.

Synchronous sweep function with optical spectrum analyzer


High-speed synchronous sweep with wide dynamic range can be achieved by coupling the world-renowned Ando AQ6317B Optical Spectrum Analyzer.

Construction

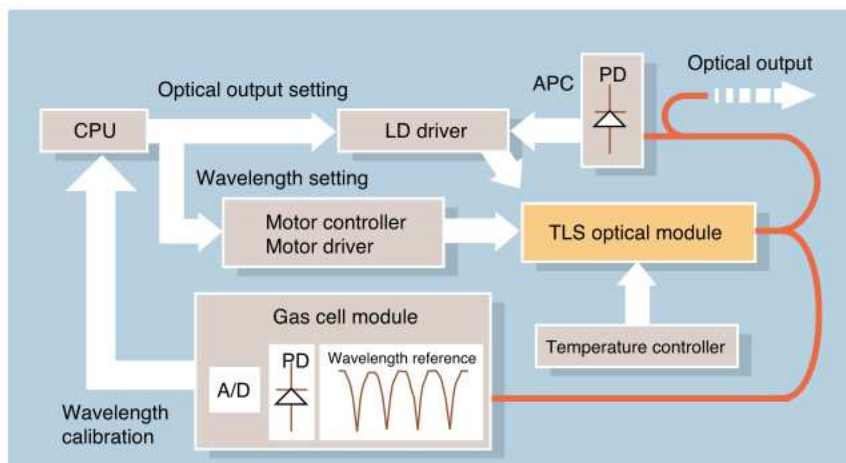


The internal structure of the AQ4321A/4321D is illustrated in the diagram at left. Inside the TLS optical module, there is a precision motor. It achieves wavelength tuning by controlling the position of optical grating at the sub-micron level. A portion of optical output is extracted and goes through the reference gas cell for wavelength offset calibration. The output light from the TLS optical module is constantly monitored by a photo detector (PD). An automatic power control (APC) circuit is used to maintain very high stability in output level. Therefore, long-term high wavelength accuracy and high output stability for AQ4321A/4321D are assured.

Application 1

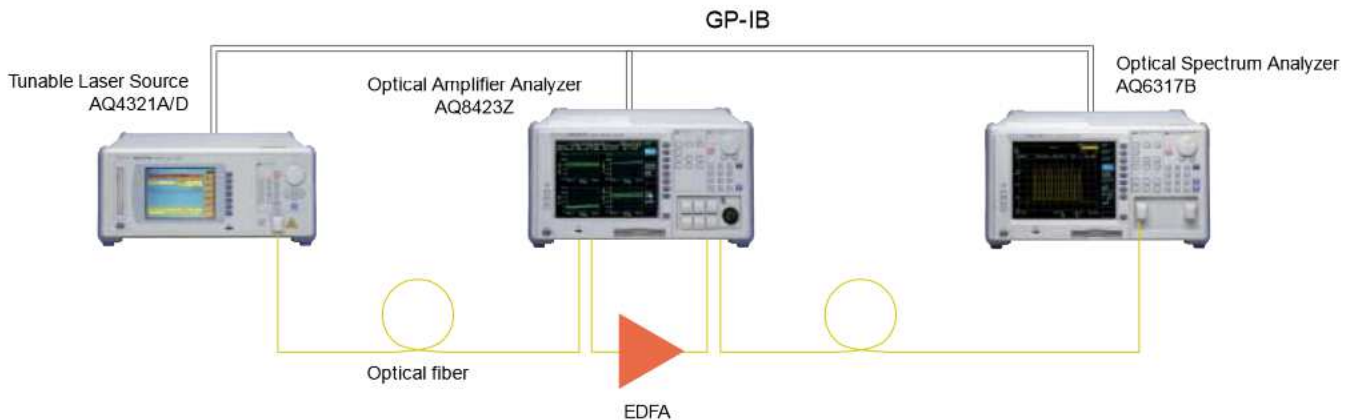

Example of optical amplifier automatic measurement

The AQ4321A/4321D Tunable Laser Source can connect to Ando's AQ8423Z Optical Amplifier Analyzer via GP-IB. This testing system can accomplish automatic measurement of the optical amplifier which was previously difficult to execute.

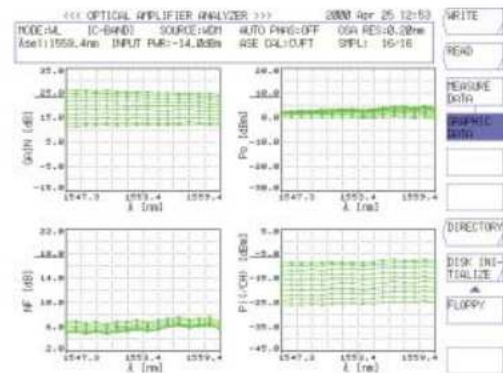

Example of output wavelength

Application 2



Example of automatic measurement of optical MUX/DEMUX

When combined with Ando's AQ6317B Optical Analyzer, optical MUX/DEMUX (AWG, etc.) spectral characteristics can be easily and accurately measured without an external controller.

Main evaluation parameters: central wavelength, insertion loss, NdB, bandwidth, crosstalk, etc.

Wide dynamic range measurement: 70 dB or more

High-speed synchronous sweep measurement: maximum 10 nm/sec.

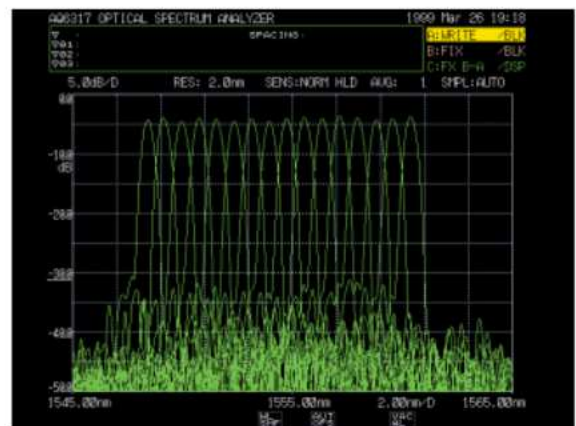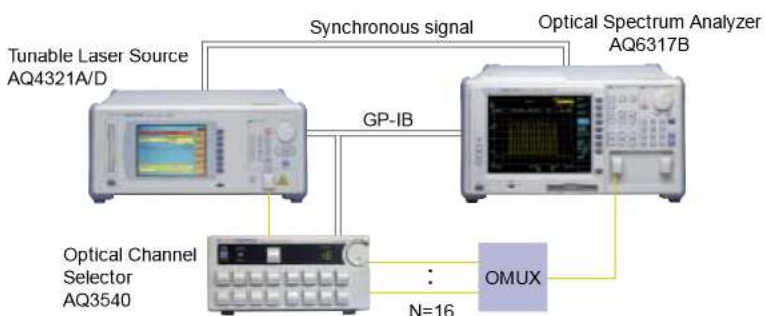

Measurement example of transmission characteristics of 16-channel AWG

Specifications

Model		AQ4321A	AQ4321D
Wavelength range		1480 to 1580 nm	1520 to 1620 nm
Wavelength set resolution		0.001 nm	
Wavelength stability		± 100 MHz/h (± 0.8 pm/h) (typ.) ^{2,3)}	
Absolute wavelength accuracy		± 0.01 nm ^{2,3,4,8)}	
Relative wavelength accuracy		± 0.015 nm, ± 0.01 nm (typ.) ^{2,3,4,7)}	
Relative wavelength accuracy		± 0.01 nm (typ.) ^{2,3,4,7)}	
Spectral width	Narrow	200 kHz (typ.) (1 MHz or less)	
	Wide	200 MHz (typ.) (100 MHz or more)	
SMSR		50 dB or more (optical output: +7 dBm, 1550 nm)	50 dB or more (optical output: +6 dBm, 1590 nm)
Optical output		+10 dBm (typ.) peak +7 dBm or more, 1520 to 1570 nm +5 dBm or more, 1500 to 1580 nm +3 dBm or more, 1480 to 1580 nm	+7 dBm (typ.) peak +6 dBm or more, 1560 to 1600 nm +5 dBm or more, 1540 to 1620 nm +3 dBm or more, 1520 to 1620 nm
Settable optical output range		20 dB or more (0.1 dB steps, at peak wavelength)	
Optical output stability	5 min	± 0.01 dB or less ^{2,9)}	
	1 h	± 0.05 dB or less ^{5,9)}	
	8 h	± 0.3 dB or less ^{6,9)}	
Optical output accuracy		± 1 dB or less ^{4,9)}	
Optical output reproducibility		± 0.04 dB, optical output fixed ^{4,5,9)}	
Optical output level flatness		± 0.1 dB ^{4,9)} (1500 to 1580 nm)	± 0.1 dB ^{4,9)} (1540 to 1600 nm)
RIN		-145 dB/Hz (typ.)	
Internal modulation (CHOP)	Set frequency	0.2 to 300 kHz ¹⁰⁾	
	Set resolution	10 Hz, 100 Hz, 1 kHz, 10 kHz, 100 kHz ¹⁰⁾	
External modulation (CHOP)	Set frequency	0.2 to 300kHz ¹⁰⁾	
	Set resolution	-	
Direct modulation	Modulation rate	5% or less (Modulation frequency: 100 kHz to 300 MHz, modulation input level: 0 dBm or less)	
Wavelength sweep speed		100 nm/sec (max.)	
Applicable optical fiber		SMF (10/125 μ m)	
Applicable connector		FC/PC (Standard), optical return loss: 50 dB or more	
Environmental conditions		Operating temperature: 10 to 35 °C, storage temperature: -10 to +50 °C, humidity: 80 % RH or less (no condensation)	
Power requirements		AC100 to 120 V/200 to 240 V, 50/60 Hz, approx. 150 VA	
Dimensions and mass		Approx. 425 (W) x 177 (H) x 450 (D) mm, approx. 20 kg	
Accessories		Power cord: 1, AQ9441 (FC) connector adapter: 1, 50 Ω terminal: 1, FD: 2, Instruction manual: 1	

Notes:

- 1) The above specifications without any special remarks are results under the following conditions: CW light, at the output point of 2 m-long optical fiber, after warming-up for 1 hour
- 2) Constant temperature: 23 °C
- 3) Spectral width: Narrow, Sweep FINE, Opt ATTN Cont = 1
- 4) Optical output level: +3 dBm
- 5) Within ± 1 °C in the range of 10 to 35 °C
- 6) 10 to 35 °C
- 7) 26 (1 hour after wavelength calibration)
- 8) At 1520 nm wavelength
- 9) Spectral width: wide
- 10) Duty: 50 \pm 5 %

Options

AQ9441(SC) Connector Adapter
AQ9441(ST) Connector Adapter

Specifications are subject to change without notice.

Ando Electric Co., Ltd.

3-484, Tsukagoshi, Saiwai-ku, Kawasaki, Kanagawa, 212-8519 Japan Phone: +81 (0)44 549 7300 Fax: +81 (0)44 549 7450

Ando Corporation

2021 N. Capitol Avenue, San Jose, CA 95132, U.S.A. Phone: +1 408 941 0100 Fax: +1 408 941 0103
EAST OFFICE: 7617 Standish Place, Rockville, MD 20855, U.S.A. Phone: +1 301 294 3365 Fax: +1 301 294 3359

Ando Europe B.V.

"Vijverdam", Dalsteindreef 57, 1112XC Diemen, The Netherlands Phone: +31(0)20 698 1441 Fax: +31(0)20 699 8938
NIEDERLASSUNG DEUTSCHLAND: Nymphenburger Straße 119 B, D-80636 München, Germany Phone: +49(0)89 143 8150 Fax: +49(0)89 143 81555

Ando Electric Singapore Pte. Ltd.

19 Kim Keat Road #05-03, Fu Tsu Building, Singapore 328804 Phone: +65 251 1391 Fax: +65 251 1987

Please visit our website for more information: www.ando.com

KT-1854-3 0107 KL250
Printed in Japan



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com