

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

T-PAD

Z-164A


DC to 1 GHz



The Z-164A is used as a matching pad for applying the mixed output of two signal generators to the input terminal of a receiver for measuring two-signal characteristics (such as the blocking and intermodulation characteristic) of the receiver.

Specifications

Frequency Range	DC to 1 GHz
Insertion Loss	6 ±0.5 dB (voltage ratio)
Impedance Characteristics	50 Ω VSWR: ≤1.3 (<500 MHz), ≤1.5 (≥500 MHz)
Connector	N (S)-J
Maximum Allowable Power	0.5 W
Operating Temperature Range	0° to 45°C

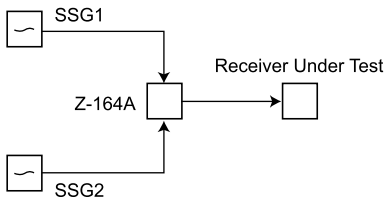


Connection for Measuring Two-signal Characteristics

FOUR-PORT JUNCTION PAD

MP659A, MA1612A

40 MHz to 1 GHz 5 MHz to 3 GHz

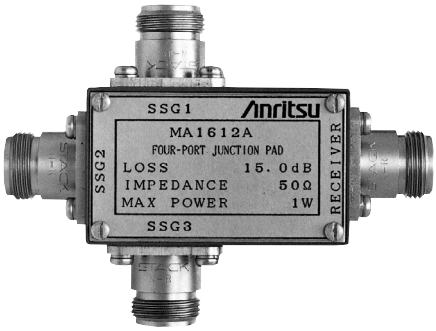


MA1612A

The MP659A and MA1612A are used as an impedance matching box applying the mixed output of three RF signal generators to a receiver input terminal for measurement of three-signal characteristics (such as receiver SINAD performance).

Specifications

Model	MP659A	MA1612A
Frequency Range	40 MHz to 1 GHz	5 MHz to 3 GHz
Insertion Loss	10.5 ±1 dB	15 ±1.0 dB (<1 GHz) 15 ±1.5 dB (≥1 GHz)
Impedance Characteristics	50 Ω VSWR: ≤1.3 (<500 MHz) ≤1.5 (≥500 MHz)	50 Ω VSWR: ≤1.4 (<1 GHz) ≤2.0 (≥1 GHz)
Connector	N (S)-J	
Isolation	SSG1-SSG2: ≥30 dB SSG1-SSG3: ≥30 dB SSG2-SSG3: ≥25 dB	SSG1-SSG2, SSG1-SSG3: ≥30 dB (<1 GHz) ≥25 dB (<2 GHz) ≥20 dB (≤3 GHz) SSG2-SSG3: ≥20 dB
Maximum Allowable Power	1 W	
Operating Temperature Range	0° to 50°C	

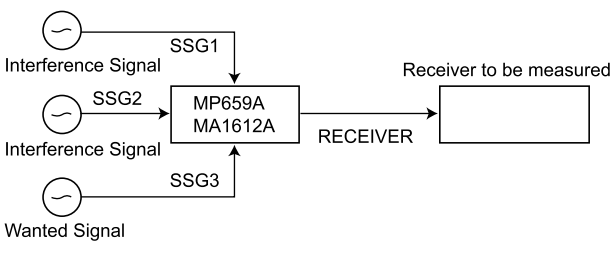

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP