ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Ant Computer IPC-PP41R* at our website: *Click HERE*

PC-PP41R Intel ULV Celeron M w/ VGA/LAN



FEATURES

> Low power CPU for fanless solution
> Equipped with Intel 852GM chipset
> Supports 2 x USB2.0
> Supports DDR SO-DIMM up to 1GB
> Expansion slots for 1 EPCI and 1 compact flash

Specifications

>> Systems

CPU Type	Intel Celeron M processor
CPU Frequency	ULV 600MHz (L2 cache) / ULV 1GHz (non L2 cache)
Chipset	Intel 852GM + ICH4 (FSB : 400MHz)
DRAM	1x200-pin DDR SO-DIMM, support DDR266 SDRAM up to 1GB
BIOS	Phoenix-Award PnP BIOS, with VGA BIOS
Watchdog	1~255 secs Watchdog timer selectable w/Reset/NMI
Power Supply	Support AT/ATX power
Power Requirement	+5V, +12V
Power Consumption	+5V: 2.35A / +12V: 0.43A (Celeron M ULV 600MHz)
Dimension	185mm x 122mm (7.28" x 4.8")

>> I/O Ports


IDE Interface	1 x 40-pin IDE (UDMA 33/66/100)
CF	1 x compact flash slot (IDE)
FDD Interface	1
Bus Interface	EPCI BUS
Serial Port	2 x COM ports, COM1 for RS232, COM2 for RS232/422/485 (for 16550 compatible type of UART)
Parallel Port	1 x parallel (SPP/EPP/ECP)
IrDA	1 (SIR)
Keyboard	Mini DIN connector or external connector

Mouse	Mini DIN connector (selectable w/ KB) or Y-cable
LAN	Intel 82562ET (10/100Mbps) Support Wake-on-LAN with ATX power
USB	2 x USB 2.0

>> **Display**	
Graphics	Built-in Intel 852GM, share system memory, support CRT, LVDS
LCD Interface	18/36-bit LVDS

>> **Environment**	
Operation Temperature	0°~60°C(32°~140°F)
Storage Temperature	-40°~85°C(-40°~185°F)
Humidity	Operation Humidity 20~90%, Storage Humidity 20~95%

- Highlights

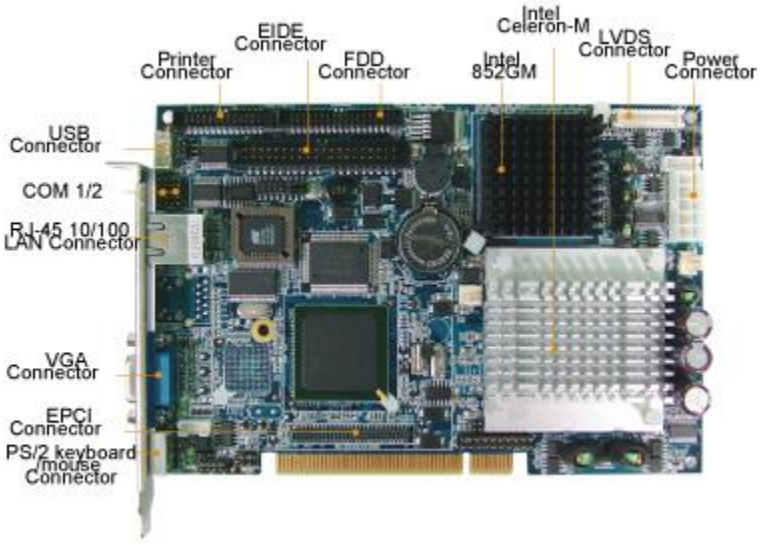

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP