



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com



SERIES AP 3625 & AP 4625

MANUAL 1/4" & 3/8" SPRINGLESS DIAPHRAGM VALVE

A new twist in 1/4 turn technology

- Stainless steel 316L VAR secondary remelt or Hastelloy® alloy C-22® construction
- 1/4 turn lever
- 15 µin. surface finish; (10, 7 and 5 µin. optional)
- Metal to metal seal to atmosphere
- Replaceable PCTFE seat (Vespel® optional)
- LOTO compatible, PL 225
- Available in surface mount, multiport or monoblock
- Optional handle sizes and colors
- Low internal volume and surface area
- Installation and operating instructions available at www.aptech-online.com in the Tech Briefs section

Operating Parameters

Inlet pressure	AP 3625	vacuum to 3,000 psig (207 bar)
	AP 4625	vacuum to 250 psig (17 bar)
Outlet pressure	AP 3625	vacuum to inlet pressure
	AP 4625	vacuum to inlet pressure
Proof pressure	AP 3625	4,000 psig (276 bar)
	AP 4625	1,000 psig (69 bar)
Burst pressure	AP 3625	8,000 psig (552 bar)
	AP 4625	8,000 psig (552 bar)

Other Parameters

Inlet/outlet connectors		1/4 or 3/8 inch face seal or tube weld
Flow coefficient (Cv)	AP 3625	0.29, X _T = 0.6
	AP 4625	0.5, X _T = 0.6
Internal volume		0.06 in ³ (1.07 cm ³)
Operating temperature		-40° to +160°F (-40° to +71°C)
Surface finish		15 µin. (0.4 µm) Ra max standard; 10 µin (0.25 µm); 7 µin (0.18 µm); and 5 µin (0.13 µm) optional
Inboard leakage		2 x 10 ⁻¹⁰ sccs
Outboard leakage		2 x 10 ⁻⁹ sccs He at 250 psig inlet pressure
Leakage across seat		4 x 10 ⁻⁸ sccs He at 250 psig inlet pressure




Materials

	Series AP 3625 & 4625 S	Series AP 3625 & 4625 H
Type of Service	Noncorrosive	Corrosive
Wetted Parts		
Body	stainless steel 316L secondary remelt	Hastelloy alloy C-22
Finish	electropolished and passivated	electropolished
Diaphragm	Elgiloy®	Elgiloy
Seat	PCTFE (Vespel® optional)	PCTFE


All specifications subject to change without notice.

Hastelloy® C-22® Haynes Corporation Vespel® DuPont Elgiloy® Elgiloy Corporation

ENGINEERING DATA — SERIES AP 3625 & AP 4625 SPRINGLESS DIAPHRAGM VALVE

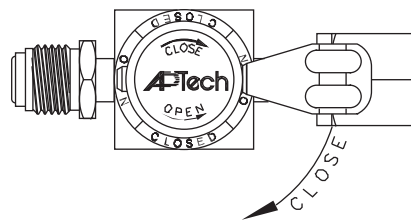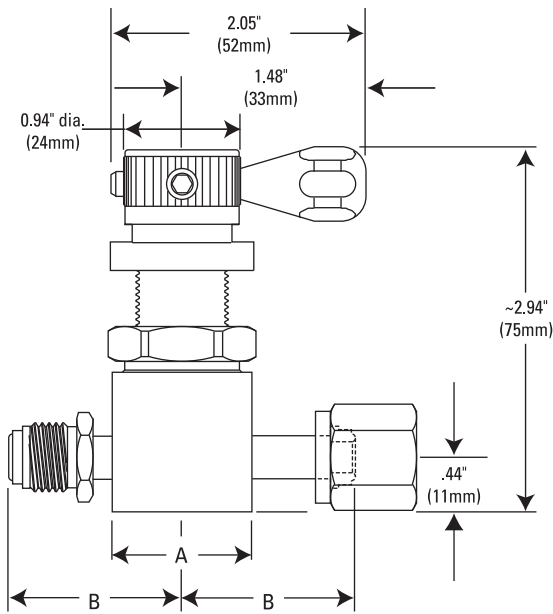

Optional handle colors and configurations available.

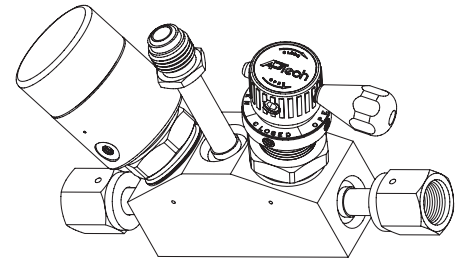

Multiport, monoblock, IGS and custom configurations available.

PLEASE NOTE

Hastelloy design may vary. Please consult factory for current specifications

MATERIAL	CONNECTION	A		B		C	
		in.	mm	in. [±.01]	mm	in. [±.01]	mm
S	FV4, MV4	1.12 sq.	28	1.39	35	—	—
	TW4	1.12 sq.	28	—	—	1.06	27
	FV6, MV6	1.12 sq.	28	1.93	49	—	—
	TW6	1.12 sq.	28	—	—	1.325	34
H	FV4, MV4	1.25 dia.	32	1.45	37	—	—
	TW4	1.25 dia.	32	—	—	1.08	27
	FV6, MV6	1.25 dia.	32	1.93	49	—	—
	TW6	1.25 dia.	32	—	—	1.325	34

All dimensions in inches (mm). Metric dimensions are for reference only.

CAUTION: Product selection is the sole responsibility of the user, regardless of any recommendations or suggestions made by the factory. The user shall make selections based upon their own analysis and testing with regard to function, material compatibility and product ratings. Proper installation, operation and maintenance are also required to assure safe, trouble free performance.

Sample Order Number

AP 3625SM 2PW MV4 MV4

AP 3625 | Series

AP 3625
AP 4625

S | Material

S = Stainless steel (SS)
H = Hastelloy alloy C-22

M | Surface Finish Options

M = 10 µin. Ra
V = 7 µin. Ra
X = 5 µin. Ra

2PW | Ports

2PW = 2 ports butt weld
3PW = 3 ports butt weld
4PW = 4 ports butt weld
5PW = 5 ports butt weld

Refer to valve porting guide for selection. Please refer to technical bulletin 206 for surface mount (IGS) options.

MV4 MV4 | Connections Inlet / Outlet

FV4 = 1/4 inch face seal female
MV4 = 1/4 inch face seal male
TW4 = 1/4 inch tube stub weld
FV6 = 3/8 inch face seal female
MV6 = 3/8 inch face seal male
TW6 = 3/8 inch tube stub weld

| Options

1.75 = 1.75" face to face TW4
VS = Vespel seat
P = Panel mount*

* Panel hole 0.78" diameter.



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com