ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.


Find the *APC AP7722* at our website: ***Click HERE***

Automatic Transfer Switch

Overview

The APC® Automatic Transfer Switch (ATS) is a high-availability switch that provides redundant power to rack-mount equipment. The Automatic Transfer Switch supplies power from a primary input line; if that line becomes unavailable for any reason, the switch automatically begins supplying power from a secondary line.

Rear view—AP7722

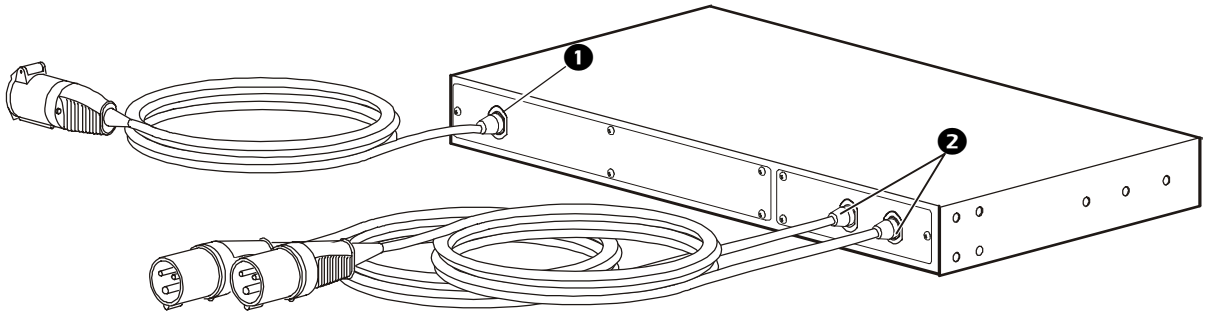

No.	Item	Description/Function
❶	Output Power Cord	The IEC 309 outlet cord connects the switch to a Rack-mount PDU, providing a redundant source of power to the PDU and the equipment connected to it.
❷	Input Power Cord	The two IEC 309 plug cords connect the switch to two separate power sources (A,B). The switch is set to draw power from the preferred source and automatically switch over to the secondary source, when necessary.

Specifications

AP7722

Electrical	
Nominal input voltage	230 VAC
Acceptable input voltage	220–240 VAC
Nominal input frequency	50/60 Hz
Input connectors	Two 36-inch, attached IEC 309 line cords
Output connectors	One 36-inch, attached IEC 309 line cord
Maximum total current draw	16 A
Physical	
Size (h × w × d)	1.71 × 17.00 × 9.00 in (4.34 × 43.18 × 22.86 cm)
Weight	8.6 lb (3.9 kg)
Shipping Weight	14.1 lb (6.4 kg)
Environmental	
Elevation: Operating (above MSL)	0 to 10,000 ft (0 to 3000 m)
Elevation: Storage (above MSL)	0 to 50,000 ft (0 to 15000 m)
Temperature: Operating	–5 to 45° C
Temperature: Storage	–25 to 65° C
Operating Humidity	0 to 95%, non-condensing
Approvals	
EMC Verification	CE, EN55022, EN55024, AS/NZS 3548
Safety Verification	CE, VDE, EN60950

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP