

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

CH Products

an APEM Group Company

TS series

Proportional Hall effect thumbsticks



The TS Series Thumbstick is a proportional two axes joystick in a miniature package. Featuring non-contacting Hall effect technology for long life performance, the TS Series Thumbstick is available with multiple linear output options including single and dual (redundant) outputs. It is similar in size and operation to "gamepad" controls, but in a rugged industrial package. Typical applications include pendant and remote controls as well as joystick handle and arm rest integration.



KEY FEATURES

- ❑ **1 or 2 axes**
- ❑ **USB outputs available**
- ❑ **Non-contact Hall effect technology**
- ❑ **Submersible to 1m (3.28ft) per IP68**
- ❑ **Pressure washable to IP69K**
- ❑ **Redundant outputs available**
- ❑ **Rear or drop-in mounting available**





TS series

Proportional Hall effect thumbsticks

OPTION SELECTION

TS [ ] [ ] [ ] [ ] [ ] [ ] [ ]

SERIES

HANDLE

0	None
1	Castle
2	Winged Hat
3	Conical
4	Finger Tip
A	All Handles

MOUNTING HARDWARE

N	None
D	Drop-in
R	Rear mount
A	All hardware

TERMINATION[1]

1	22AWG 25cm PTFE
2	28AWG 25cm PTFE
3	Customer specified

LIMITER

U	Single axis
S	Square
G	Guided feel
P	Plus

OUTPUT OPTIONS

00	0V to 5V (Rail to Rail)
01	0.25V to 4.75V
02	0.5V to 4.5V
03	1V to 4V
04	0V to 5V - Sensor 1 0V to 5V - Sensor 2
05	0.25V to 4.75V - Sensor 1 0.25V to 4.75V - Sensor 2
06	0.5V to 4.5V - Sensor 1 0.5V to 4.5V - Sensor 2
07	1V to 4V - Sensor 1 1V to 4V - Sensor 2
08	0V to 5V - Sensor 1 5V to 0V - Sensor 2
09	0.5V to 4.5V - Sensor 1 4.5V to 0.5V - Sensor 2
10	0.25V to 4.75V - Sensor 1 4.75V to 0.25V - Sensor 2
11	1V to 4V - Sensor 1 4V to 1V - Sensor 2
12	Customer specified
13	PWM[2]
14	USB
15	Joyball (Cursor emulation)

POWER SUPPLY OPTIONS

A	Single
B	Independent[3]

SPECIFICATIONS

MECHANICAL (FOR X, Y AXES)

Operating Force	–	3.1N±0.5N (0.70lbf±0.11lbf)[4]
Maximum Vertical Load	–	200N (45lbf)[4]
Maximum Horizontal Load	–	150N (33.7lbf)[4]
Mechanical Angle of Movement	–	50°
Expected Life	–	1 million cycles
Mass/weight	–	18.25g ± 5.0g (0.64oz±0.18oz)
Lever Action (Centering)	–	Spring centering

ENVIRONMENTAL

Operating Temperature	–	-40°C to +85°C (-40°F to +185°F)
Storage Temperature	–	-40°C to +85°C (-40°F to +185°F)
Sealing	–	IP68, IP69K[5]
EMC Immunity Level	–	EN61000-4-3
EMC Emissions Level	–	EN61000-6-3:2001
ESD	–	EN61000-4-2

ELECTRICAL SENSOR

Resolution	–	1.22mV
Supply Voltage Range	–	5.00V±0.01V
Reverse Polarity Max	–	-10V
Overvoltage Max	–	20V
Output Impedance	–	2Ω
Return to Center Voltage Tolerance	–	±200mV initial

NOTES:

 Mounting accessories.

Standard hardware includes:
• For the Drop-in option - 4 push in connectors, drop-in bezel and an O-ring.
• For the Rear mount option: 4x1/2 FH SS Phil Screws and a rear mount bezel.

1-1 - Wires are thick, robust, and best suited for stand alone applications.
1-2 - Wires are thin and best suited for tightly constrained wire routing.

2 Contact factory for PWM configuration.

3 Only available on dual output.

4 Force applied to the top of the castle cap.

5 All options are IP68 and IP69K rated, however Drop-in mounting does not prevent panel ingress.

- All values are nominal


Note: The company reserves the right to change specifications without notice.


TS series

Proportional Hall effect thumbsticks

DIMENSIONAL DRAWINGS




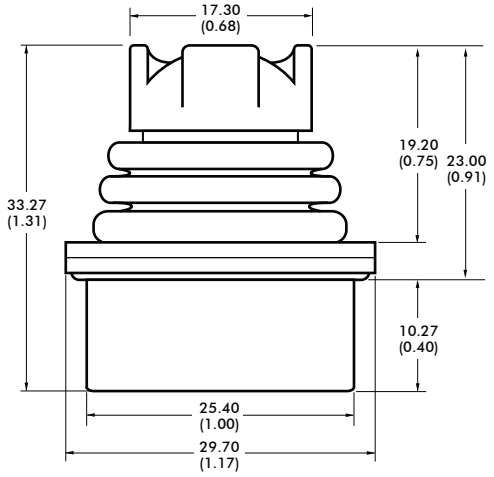

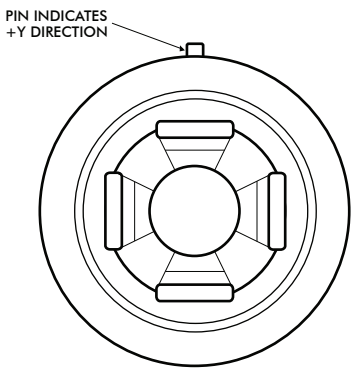


HANDLE OPTIONS


1




2



3




4




MOUNTING OPTIONS

DROP-IN OPTION CUTOUT DIMENSIONS

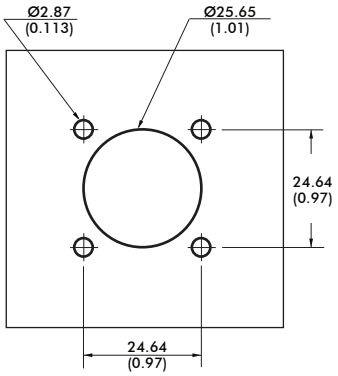



REAR MOUNT OPTION CUTOUT DIMENSIONS

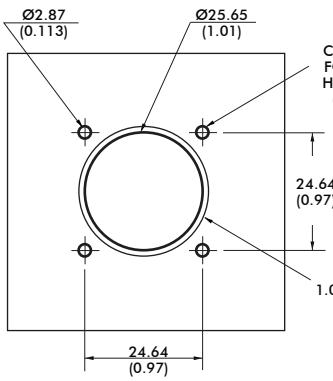



Note: Maximum panel thickness is 2.032mm (0.08in)

Note: Dimensions are in mm/(inch)




Note: The company reserves the right to change specifications without notice.

TS series


Proportional Hall effect thumbsticks

CONFIGURATION OPTIONS

LINEAR OUTPUT OPTIONS

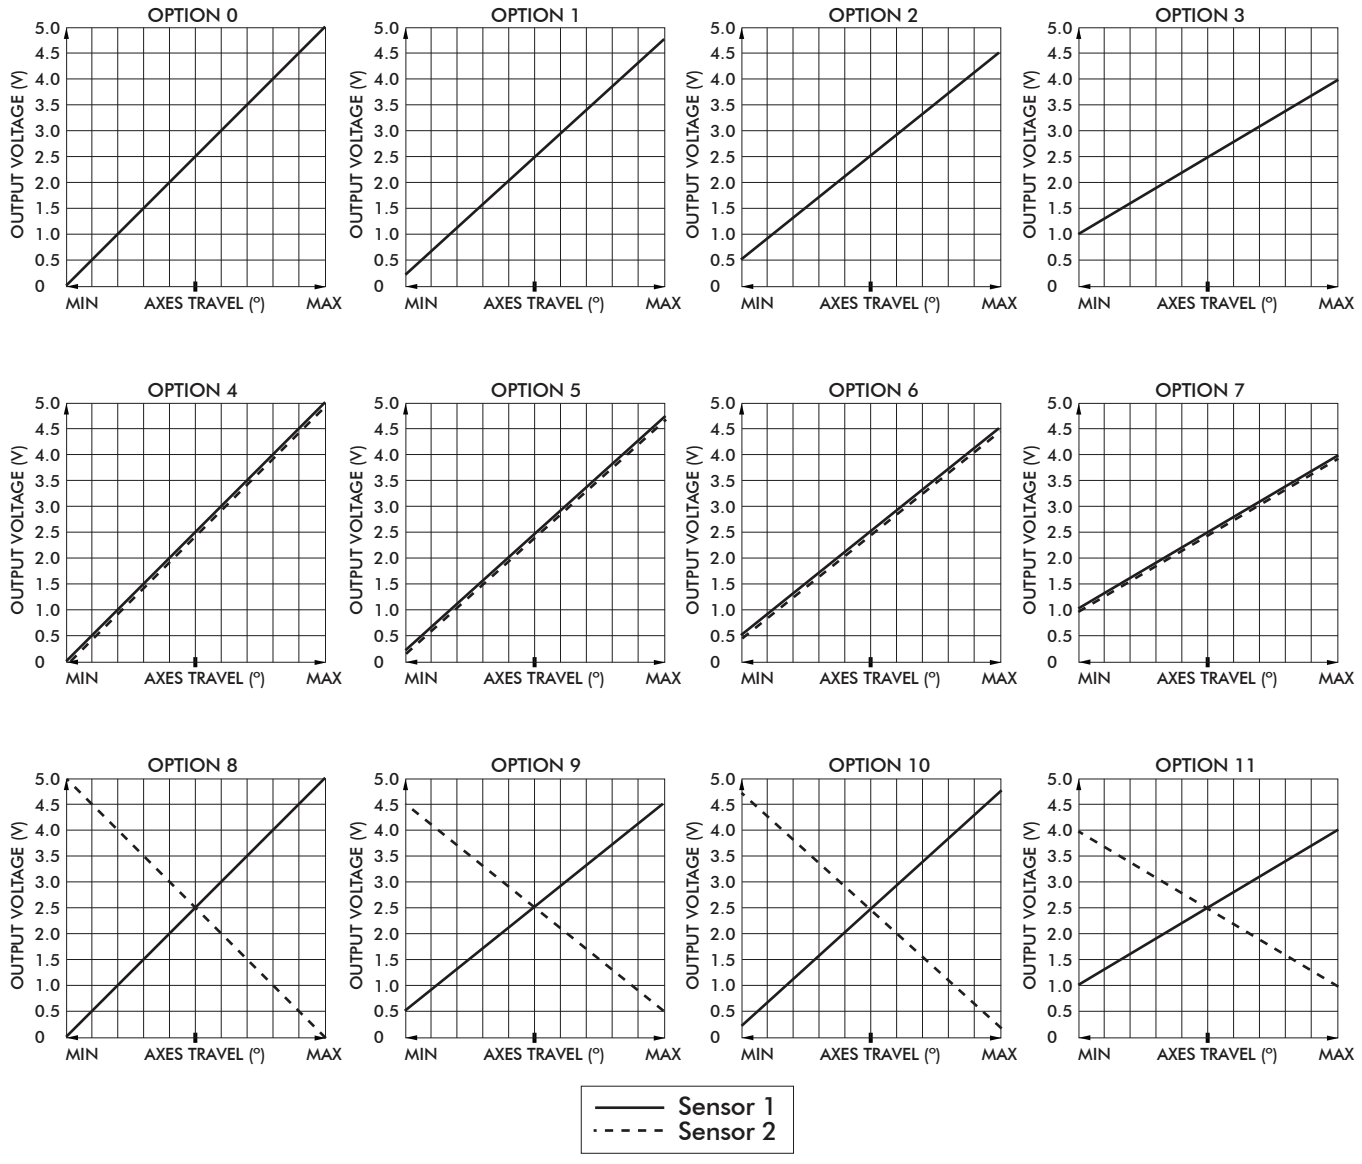

WIRING

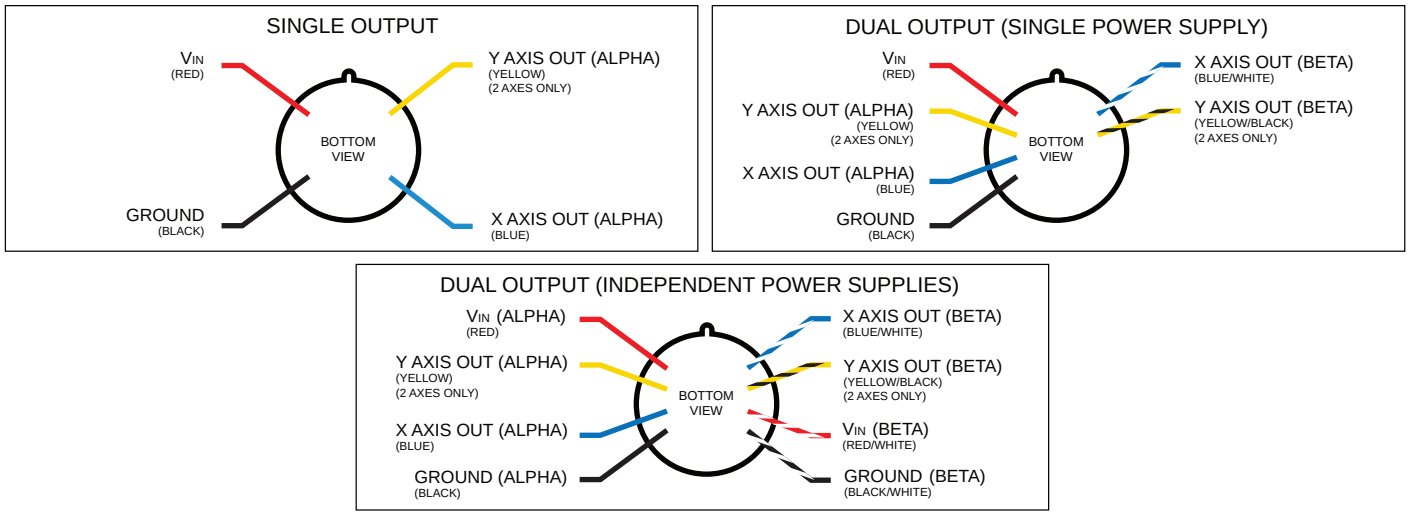

Note: The company reserves the right to change specifications without notice.

ADDITIONAL OUTPUT OPTIONS

PLUG-AND-PLAY SOLUTIONS:

USB

Featuring USB 1.1 HID compliant interface, CH Products' USB joysticks are recognized as standard HID "game controller" devices. Adhering to the HID specification, CH Products' USB joysticks are plug-and-play with most versions of Windows and Linux. Joystick button and axes assignments are dependent upon the controlled application.

FEATURES


- USB 1.1 HID compliant "game controller" device
- Easy to install and operate
- Functions determined by controlled application



USB Male Type A Connector

SUPPLIED WIRING

USB: USB Male Type A Connector with overmolded cable
(Optional ruggedized military connectors are available.)

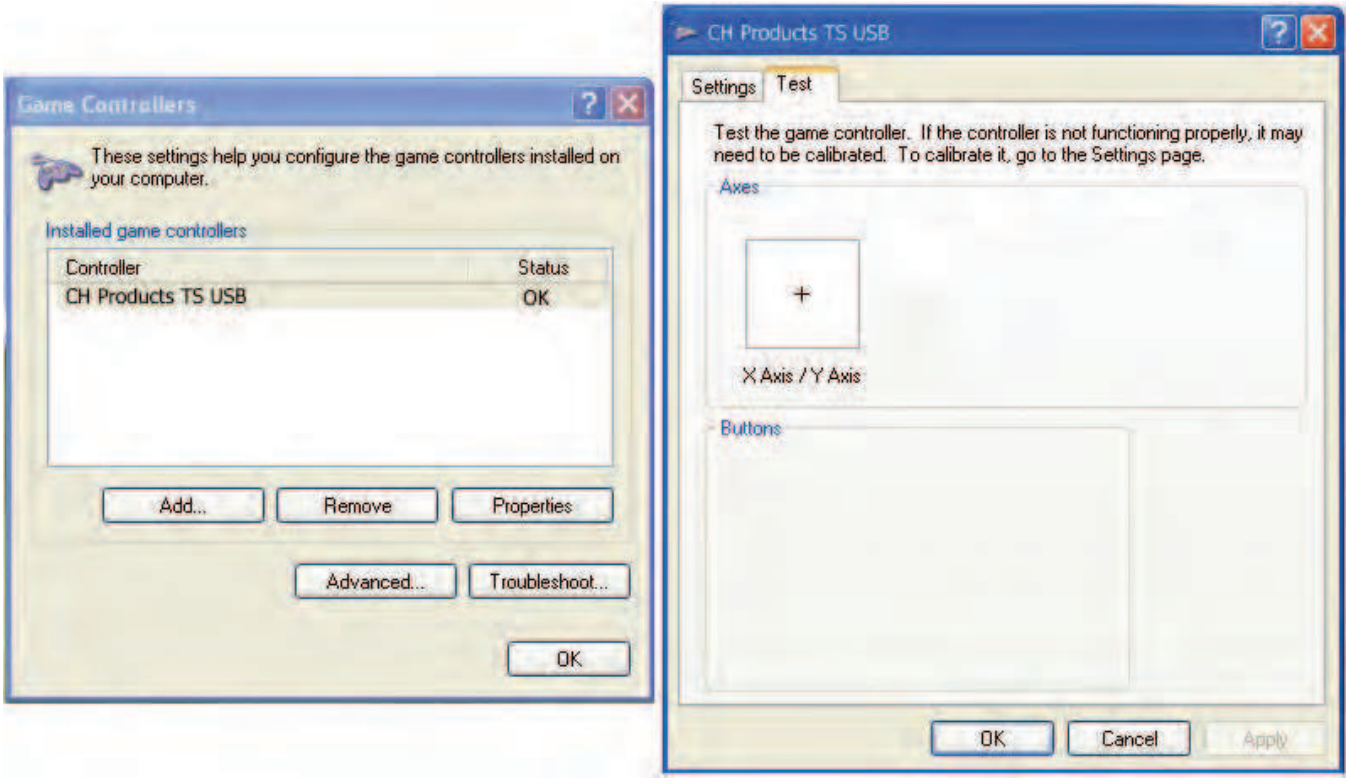

Note: The company reserves the right to change specifications without notice.

TS series

Proportional Hall effect thumbsticks

CONFIGURATION OPTIONS


ADDITIONAL OUTPUT OPTIONS

JOYBALL (CURSOR EMULATION)

The Joyball option converts multi-axis joystick ouput into a mouse, trackball, or cursor control device. The joystick's internal microprocessor converts absolute axis position into a curser velocity, which is translated as a relative trackball or mouse position. Supported protocols: USB.

APPLICATIONS

The Joyball option is ideal for vehicle applications subjected to dirt and high vibration which make operating a traditional cursor control device difficult. The Joyball option is widely used in shipboard and military applications.

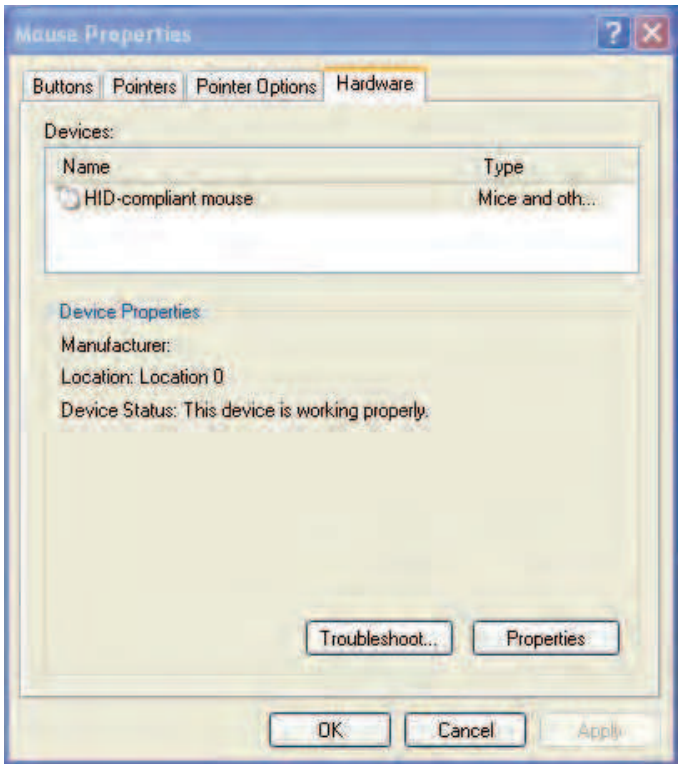

FEATURES

- HID compliant "pointing device"
- Plug-and-play with USB option
- Ideal for marine GPS and navigation

SUPPLIED WIRING

USB: USB Male Type A Connector with overmolded cable.

Note: The company reserves the right to change specifications without notice. The graphs are provided for representational puroses only.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP