ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Apex Embedded Systems STX104* at our website: *Click HERE*

Apex Embedded Systems


HIGH-REL PC/104 Advanced Analog I/O Module with 1M Sample Memory

STX104

January 1, 2005

The STX104 is a **High-Reliability PC/104** 16 channel 16-BIT A/D and dual 16-BIT D/A card that incorporates a large 1M sample FIFO. The list below briefly highlights many key advantages:

- **Industry Standard Form Factor**. Compliant to the PC/104 standard form factor ensuring consistent system packaging
- **Long-Term Product Availability.** Apex Embedded Systems is committed to delivering long life cycle products.
- **1 MegaSample FIFO**. Huge A/D FIFO enables applications to run without data loss even under long interrupt latency conditions.
- **Designed for operation in harsh environments.** All components and materials used in our products are designed to operate in the extended and/or mil-spec temperature range, under high shock and vibration without up or de-rating of any materials.
- **-40 to 85° C Operating Temperature.**
- **No tantalum or electrolytic capacitors used in the design.**
- **FPGA customization available.**
- **LED Read/Write Status indicator.** An LED displays card activity which is useful for both product development and field service status.
- **16 single-ended or 8 differential analog input channels with 16-bit resolution.**
- **Programmable input gain**
- **Very low noise analog inputs:** Less than 1.5-LSB RMS over all input ranges (1.1-LSB RMS typical). Noise reduction to 0.6-LSB RMS can be achieved using the jumper selectable sixteen sample moving average filter.
- **200,000 samples per second maximum A/D sampling rate.**
- **Analog input read via software, interrupt or DMA.**
- **16-bit data read (ADC data) operations** double effective PC/104 bus bandwidth
- **Burst mode** with only one interrupt generated per complete scan, thus reducing interrupt overhead and increasing effective throughput.
- **Two 16-bit D/A outputs**
- **16-bit data write (DAC data) operations reduce software overhead**

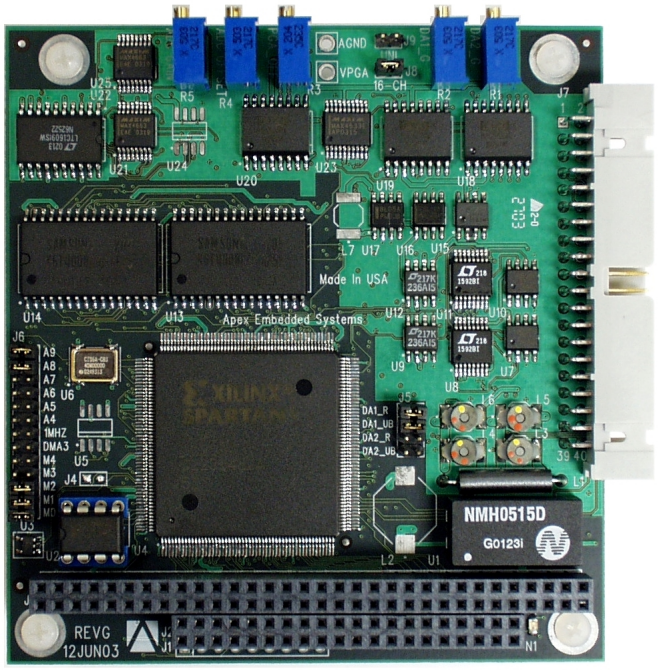

- **Four digital inputs**
- **Four digital outputs**
- **16-Sample moving average filter for data noise reduction** (jumper selectable)
- **One 32-bit counter/timer for A/D pacer clock**
- **One 16-bit general purpose counter/timer**
- **Software compatibility with:** ComputerBoards CIO-DAS1602/16, DAS-16/16jr PC104-DAS16JR/16, DAC-02 and Keithley DAS-16.
- **Single +5V Supply Operation**
- **Polarized Locking I/O Connector**
- **Designed and manufactured in Wisconsin by Apex Embedded Systems.** We will do whatever we can to assist you in designing in our products.
- **STX104 truly offers the "best-value" and in PC/104**

Apex Embedded Systems
116 Owen Road
Monona, WI 53716
Voice: 608-256-0767 EXT 22
FAX: 608-256-0765
sales@apexembedded.com
http://www.apexembedded.com/

Technical Specifications:

Analog Inputs

ADC Resolution: 16-bits (1/65536 of full scale). No missing codes guaranteed
Number of Channels: 8 differential or 16 single-ended
Input Ranges: Bipolar: ±10V, ±5V, ±2.5V, ±1.25V**;** Unipolar: 0 to 10V, 0 to 5V, 0 to 2.5V 0 to 1.25V
Input Bias Current: 50nA maximum
Absolute Maximum Input Voltage: ±35V
Integral Linearity Error: ±1.5 LSB (±3 LSB on 1.25V range)
Differential Linearity: ±1 LSB
Polarity: Unipolar/Bipolar jumper selectable.
Input Sensitivity: 19uV
Noise Characteristics: Gaussian behavior with maximum peak-to-peak internal noise of less than 1.5-LSB RMS over all input ranges and operating temperatures (1.2-LSB RMS typical). Jumper selectable 16-bit moving average filter drops noise to less than 1-LSB RMS over all input ranges and operating temperatures (0.6-LSB RMS typical).
Input Type: True differential or single-ended
Input Impedance: (1) Differential: 20MΩ min. resistance in parallel with 47pF; (2) Single-Ended: 20MΩ min. resistance in parallel with 27pF.
Accuracy: 0.003% of reading, ±1 LSB
Gain Drift: ±7ppm/°C
DC Drift or Zero Drift: ±2ppm/°C
Common Mode Voltage Range: ±10V
Common Mode Rejection Ratio: 70dB at 60Hz
Maximum Sampling Rate: 200,000 Samples Per Second (200KSPS)
ADC Conversion Time: 5uS
A/D Conversion Trigger: Programmable internal counter, external source (DI0/TRIG) or software polled.
A/D Trigger Sources: External polled gate trigger (DI0/TRIG)
A/D Trigger Modes: Gated pacer, software polled. (Gate must be disabled by software after trigger event)
Data Transfer: From 1MEG sample FIFO via interrupt, DMA or software read out.

Analog Output

Resolution: 16 bits
Number of channels: 2 D/A
Output voltage ranges: ±10V, ±5V, 0-5V, 0-10V or user defined range between 0 and 10V. Each channel independently configurable by jumpers.
Offset error: less than 8 LSB
Gain error: Adjustable to 0 by potentiometer
Differential non-linearity: ±1LSB max
Integral non-linearity: ±1LSB max
Monotonicity Guaranteed

Digital I/O

Number of Inputs: 4 TTL compatible
Input Voltage: Logic 0: 0.0V min, 0.8V max; Logic 1: 2.0V min, 5.5V max
Input Current: ± 1uA max
Number of Outputs: 4 TTL compatible
Output Voltage: Logic 0: 0.0V min, 0.4V max; Logic 1: 2.4V min, 3.3V max.
Output Current: ±12mA per line max

Counter/Timers

A/D Pacer Timer: 32-bit down counter (2 82C54 counters cascaded)
Clock Source Jumper selectable: 1 MHz or 10 MHz on-board clock source.
General Purpose: 16-bit down counter: (1 82C54 counter)
Interrupt/DMA Trigger: End of A/D Conversion

General

Operating temperature range: -40 to 85°C
Storage temperature range: -55 to 125°C
Factory Calibration: Full NIST Traceable
Humidity: 0 to 95% non-condensing
Power Supply: 5VDC ± 5%
Interface: PC/104 8 or 16-bit

Ordering Information

P/N: STX104-1MFIFO-DAQ
Description: HIGH-REL 16-bit PC/104 Analog I/O Module with 1M sample FIFO

Apex Embedded Systems
116 Owen Road
Monona, WI 53716
Voice: 608-256-0767 EXT 22
Fax: 608-256-0765
sales@apexembedded.com
http://www.apexembedded.com/

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP