

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *API Technologies / Weinschel 1515* at our website: ***Click HERE***

Model 1515 & 1515-1

Broadband Resistive Power Divider

Ruggedized SMA Connectors

dc to 18.0 GHz

1 Watt

RoHS



Features

- **Miniature Size & Lightweight -** High power capability and high ambient temperature operation.
- **Close Tracking & Low Frequency Sensitivity -** Output power symmetry is excellent across the frequency range. Division is 6 dB from matched ports.

Specifications

NOMINAL IMPEDANCE: 50 Ω

FREQUENCY RANGE: dc to 18.0 GHz

INSERTION LOSS (between input & either output arm): 6 dB nominal, -0.2 dB, +1.2 to 10 GHz, 1.5 to 18 GHz

MAXIMUM INPUT POWER: 1 watt CW, 1 kilowatt peak (5 µsec pulse width, 0.05% duty cycle)

NUMBER OF PORTS: 3, interchangeable for input and output

PHASE TRACKING: 5° maximum between ports (J2 & J3) with input connector (J1).

POWER COEFFICIENT: < 0.005 dB/dB/watt

TEMPERATURE COEFFICIENT: < 0.0004 dB/dB/°C

TEMPERATURE RANGE: -55°C to +125°C

CONSTRUCTION: Nickel plated brass body; stainless steel connectors; gold plated beryllium copper contacts.


TEST DATA: Insertion loss data supplied at 50 MHz, 12.0, and 18.0 GHz. Other test data can be provided at additional cost.

CONNECTORS: Model 1515: Male SMA connector port 1 and Female SMA connectors ports 2 and 3.

Model 1515-1: SMA Female connectors all ports--all SMA connectors per MIL-STD-348 interface dimensions - mate nondestructively with MIL-C-39012 connectors.

WEIGHT: Net 30 g (1 oz)

PHYSICAL DIMENSIONS:

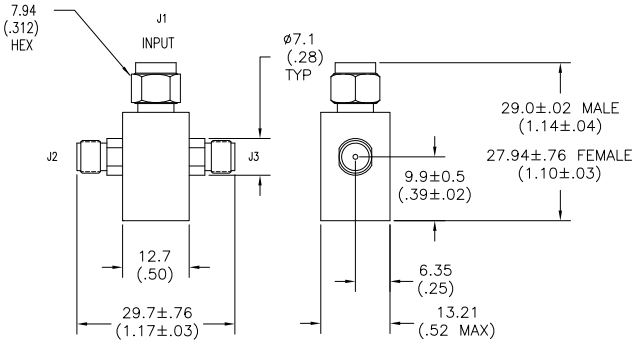

Model No.	Input Connector	Output Connector
1515	SMA Male	SMA Female
1515-1	SMA Female	SMA Female

NOTE: All dimensions are given in mm (inches) and are maximum, unless otherwise specified.

AMPLITUDE TRACKING-J2 & J3 (Maximum):

Frequency (GHz)	Tracking
dc - 4	0.2 dB
4 - 10	0.4 dB
10 - 18	0.5 dB

MAXIMUM SWR:

Frequency (GHz)	SWR
dc - 10	1.25
10 - 18	1.35

5305 Spectrum Drive, Frederick, MD 21703-7362 • TEL: 301-846-9222, 800-638-2048 • Fax: 301-846-9116
web: www.weinschel.apitech.com • email: weinschel-sales@apitech.com

Revision Date: 08-03-2016

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP