

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*



Racal Instruments™ 1260-138A

High-Density Multiplexer Plug-In

The Racal Instruments™ 1260-138A is a high-density scanner/multiplexer switch card for use in either Racal Instruments™ 1260-100 or 1260-101 VXI Carrier or the Racal Instruments™ 1256 GPIB/Ethernet Switching System.

Key Features

- **Eight 1x8, two-wire scanner/ multiplexer**
- **Link 1x8 cells under program control**
- **Link up to 6 plug-ins under program control**
- **True differential design ideal for telecom and datacom applications**
- **Two and four-wire switching modes**
- **Standard Adapt-a-Switch™ plug-in design for ease of replacement**

Product Information

This plug-in provides maximum flexibility to construct a wide range of scanner/ multiplexer configurations under software control while maintaining excellent bandwidth and signal integrity.


All relays are bi-directional, enabling use as either a scanner or multiplexer. Each (1x8) multiplexer can be used to connect any combination of up to 8 two-wire signals to a two-wire common. These commons can be linked under program control to construct any combination of larger multiplexers. Possible configurations include:

- One (1x64) two-wire
- Two (1x32) two-wire
- Four (1x16) two-wire
- One (1x16) two-wire plus One (1x48) two-wire
- Many other configurations

Multiple plug-ins can be linked under program control via the Adapt-a-Switch™ carrier or 1256 analog bus to form large two- and four-wire multiplexers. This allows you to construct very large multiplexers without external wiring. It also eases the integration/wiring task while maintaining signal integrity.

This card was designed for true differential switching, which makes it ideal for telecom and datacom applications. However, it has great single ended characteristics as well with >85 MHz bandwidth. With its combination of density, versatility, expandability, and high signal integrity, the 1260-138A is ideal for construction of large switching systems, as well as applications where the final switching requirements are not fully defined. The 1260-138A is an excellent choice for continuity testing, audio, video, telecom, datacom, and multipurpose ATE systems

The Racal Instruments™ Option 01T interface (for VXI) controls the 1260-138A using either register-based or message-based commands. The 1256 (for GPIB/ Ethernet) supports message-based operations. Refer to the Option 01T/1256 literature for more information about

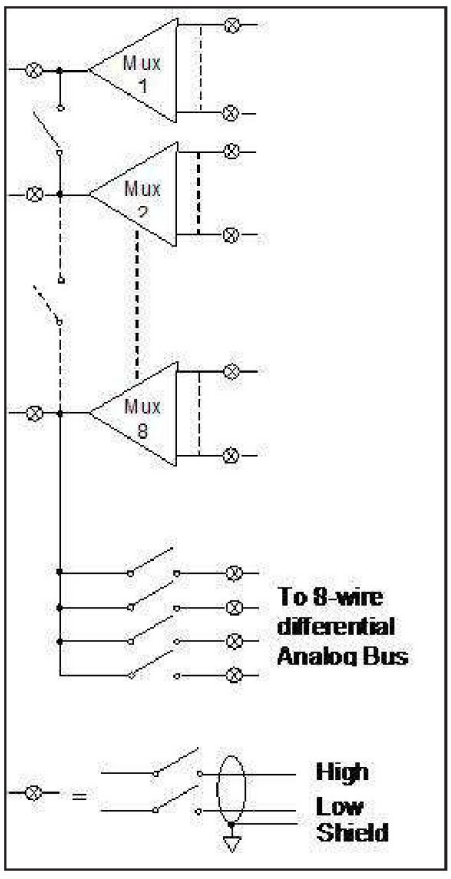

Block diagram

ECO# 2011-EADSTS-02-01-11-48-MU. Uncontrolled Unclassified Information ("UUI"). This documentation does not contain ITAR-controlled data within the definition of the ITAR and has been reviewed and approved for release to non-US persons. EADS North America Proprietary Copyright © 2011

Product Information

continued

product specifications and features such as include, exclude, and scan lists, user-defined path names, and reset states.

The Adapt-a-Switch™ series includes VXI*plug&play* support for frameworks based on Microsoft Win32® application programming interface, including drivers for LabWindows™/CVI and LabVIEW™.

Specifications

Note: The EADS North America Test and Services policy is one of continuous development and improvement. Consequently, the equipment may vary in detail from the description and specifications in this publication.

Input

Maximum Switching Voltage
- 300 VDC or 300 VAC

Maximum Switching Current
- 2 ADC or 2 AAC

Maximum Switching Power
- 60 W, 125 VA

DC Performance

Path Resistance
- 1x8 (2-wire): <500 mΩ
- 1x64 (2-wire): <500 mΩ

Insulation Resistance
- 10^9 Ω

Thermal EMF
- 1x8 (2-wire): <15 µV
- 1x64 (2-wire): <20 µV

AC Performance (Into 50 Ω)

Bandwidth (-3 dB)
- 1x8: >85 MHz
- 1x64: >4 MHz

Insertion Loss (1X8)
- 100 kHz: <0.1 dB
- 1 MHz: <0.2 dB
- 10 MHz: 1.7 dB
- 30 MHz: <1.7 dB

Isolation (1x8)
- 100 kHz: >88 dB
- 1 MHz: >78 dB
- 10 MHz: >44 dB
- 30 MHz: >40 dB

Crosstalk (1X8)
- 100 kHz: <-63 dB
- 1 MHz: <-63 dB
- 10 MHz: <-41 dB
- 30 MHz: <-34 dB

Capacitance
- 1x8 (Channel to Chassis): <50 pF
- 1x8 (Open Channel): <5 pF
- 1x8 (Hi to Lo): <110 pF
- 1x64 (Hi to Lo): <400 pF

Interface

Power Requirements
- +5 VDC at 150 mA plus 30 mA per energized relay (2 A)

Front Panel I/O Interface Connector
- 160 pin DIN Connector

Environmental

Temperature
- Operating: 0° C to 55° C
- Storage: -40° C to 75° C

Relative Humidity
- 85% ±5%, non-condensing at <30° C

Altitude
- Operating: 10,000 ft
- Non-Operating: 15,000 ft

Shock
- 30 g, 11 ms, ½ sine wave

Vibration
- 0.013 in: (pk-pk), 5 to 55 Hz

Bench Handling
- 4-inch drop at 45°

Emissions
- EN55011A with limits in accordance with EN50081-1

Immunity
- IEC801-2,3,4 with limits in accordance with EN50082-1

Safety
- EN61010-1

Switching Time
- <3 ms max (includes settling time)

Rated Switch Operations
- Mechanical: 1×10^8
- Electrical: 1×10^6 @ 50 V, 0.1 A; 1×10^6 @ 10 V, 10 mA

MTBF
- MIL-HDBK-217E: 183,169 hrs
- Bellcore: 154,107 hrs

MTTR
- <5 min

Mechanical

Weight
- 13 oz (0.45 kg)

Dimensions
- 4.5" H x 0.75" W x 9.5" D

Cooling Requirements
- See 1260-100 cooling data

CE The CE Mark indicates that the product has completed and passed rigorous testing in the area of RF Emissions and Immunity to Electromagnetic Disturbances, and complies with European electrical safety standards.

Copyright © 2010 EADS North America Test and Services

Artisan Scientific - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisan-scientific.com

Ordering Information

Note: When the 1260-138A is used in a VXI mainframe other than a 1256, a Racal Instruments™ Option 01T Smart Control Module must be installed in the mainframe's left-most slot.

407723 : Racal Instruments™ 1260-138A
Adapt-a-Switch™ High-Density Multiplexer Plug-in Module

Accessories:

OPT-405108-001 : Racal Instruments™ Option 01T Smart Card Module installed (manual must be ordered separately; see below)
407531-001 : Racal Instruments™ Option 01T Smart Card Module (not installed) with manual
407664 : 160-pin Connector Kit with Strain Relief
407408-001 : 160-Pin Cable Assembly, 6 ft, 24 AWG
407409-001 : 160-Pin Cable Assembly, 12 ft, 24 AWG
407809-001 : 160-Pin Cable Assembly, 6 ft, 24 AWG
602258-116 : 160-Pin Backshell
602258-900 : Extra 24 Gauge contact
990898 : Insertion Tool
990899 : Extraction Tool
991020 : Crimp Tool

All trademarks and service marks used in this document are the property of their respective owners.

- Racal Instruments and Adapt-A-Switch are trademarks of EADS North America Test and Services in the United States and/or other countries
- Microsoft and Win32 are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries
- LabVIEW and LabWindows are trademarks of National Instruments in the United States and/or other countries

Copyright © 2010 EADS North America Test and Services

Artisan Scientific - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisan-scientific.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP