

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

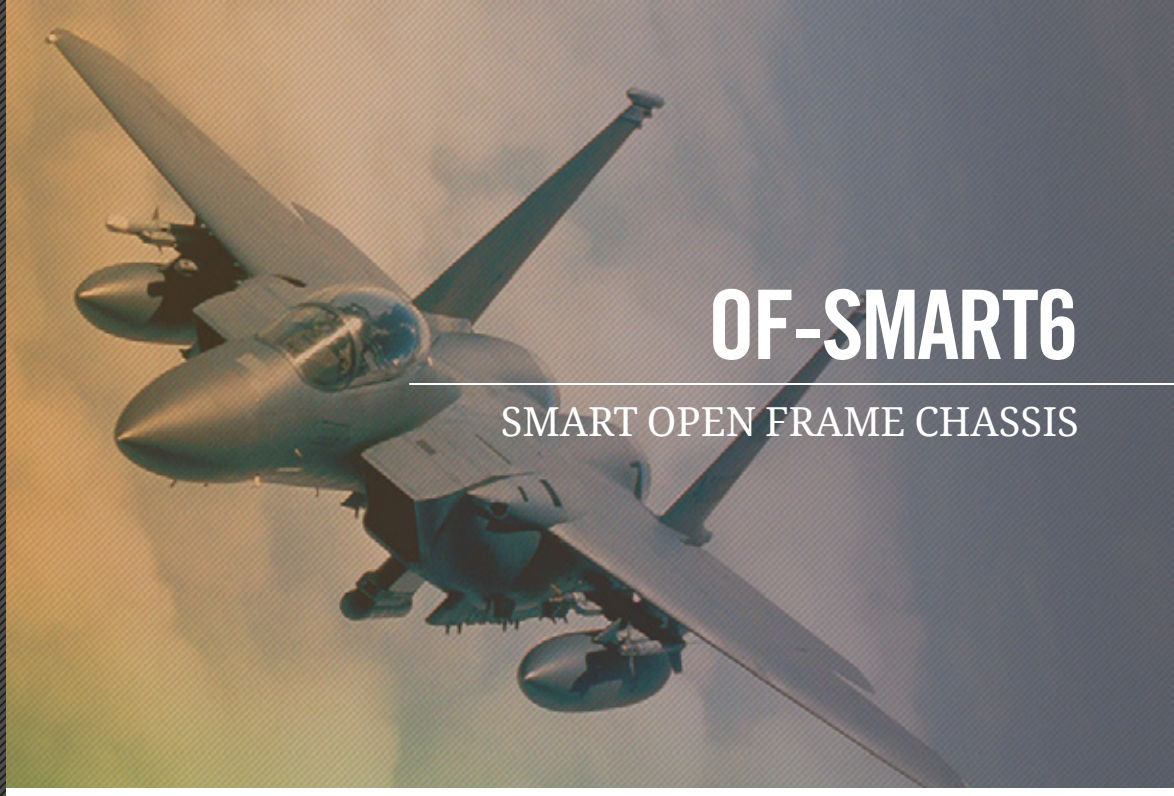
- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

Atrenne
A Celestica Company



OF-SMART6

SMART OPEN FRAME CHASSIS

BENEFITS

- Supports 6U backplanes, up to seven slots: VPX™, CompactPCI® and VME
- Extreme cooling development chassis providing >19 CFM of cooling air
- Open frame allows easy access to boards for testing and debug
- Selection of power supplies up to 1200W
- Fan speed control knob allows adjustment of fan speed for lower fan acoustic noise (not available in the ATX version)
- Variety of 6U backplanes including VPX Gen-3 backplanes rated for 10.3 Gbaud



The OF-SMART6 is an open frame chassis for 6U, VPX, CompactPCI and VME lab development. Atrenne's family of open frame chassis provide easy access to board components for testing and debug. The high-speed -fan provides greater than 19 CFM of cooling air per slot. The OF-SMART6 is available with a choice of backplanes, including Atrenne's newest 10 Gbaud, Gen-3 backplanes.

This lab development chassis is part of Atrenne's industry-leading family of high-performance chassis and backplanes.

FEATURES

- Optional USB connection for remote voltage margining and current monitoring
- Open sides and top support access by engineering and test personnel for debugging
- Supports 6U backplanes, up to seven slots: VPX REDI™ (1.0" pitch), VPX™, CompactPCI® (cPCI) and VME
- VPX REDI designed to the latest ANSI/VITA 46.0, VITA 46.3, ANSI/VITA 46.10, VITA 48.0, VITA 48.1 and VITA 65 OpenVPX™ specifications
- 6U x 80 mm Rear Transition Modules (RTMs) per VITA 46.10 (for VPX) and IEEE 1101
- Extreme cooling development chassis
- 6U x 160 mm card cage with x7 1.0" pitch positions per VITA 48.1 VPX REDI or x9 0.8" pitch positions per IEEE 1101.10
- Available with Gen-3 10.3 Gbaud backplanes
- High performance 335 CFM fan provides >19 CFM per slot
- ATX power supply version: 252 CFM fan provides >12 CFM per slot
- Patented CoolSlot® card guides improve airflow distribution across the cards
- Fan speed control knob allows adjustment of fan speed for lower fan acoustic noise (not available in the ATX version)



OF-SMART6

SMART OPEN FRAME CHASSIS

- Selection of power supplies up to 1200W
- Smart power supply control interface
- Front panel power LED indicators and system reset
- Rear panel AC power switch and ESD jack
- x2 rear mounted power connections for external peripherals

TABLE 1: TECHNOLOGY OVERVIEW

PHYSICAL	
Width	8.58" (218.9 mm)
Height	20.68" (525.3 mm)
Depth	14.0" (355.6 mm)
Weight	25 lbs
CONSTRUCTION	
Extrusions	6063-T6 aluminum, precision grade with clear iridite plating
Sideplates	.250" thick aluminum, 5052-H32 with clear iridite plating
Card Guides	Molded plastic, Noryl N190X black, UL94-V0
ENVIRONMENTAL	
Safety Agencies	Designed to meet UL60950; CSA 22.2 #234; TÜV EN60950
Flammability Rating	UL94-V0
Earthing	ESD ground clip designed to comply with the earthing requirements of IEEE 1101.11 Section 15, IEC 60950 Section 2
EMC	Designed to meet FCC Part 15, Subpart J, Class A; CISPR 22, Class A: conducted portion only
POWER	
AC Input	20A 110/220 VAC inlet 110V line cord provided

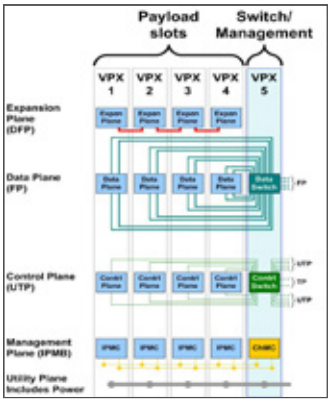
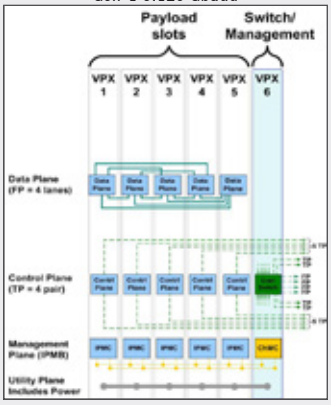
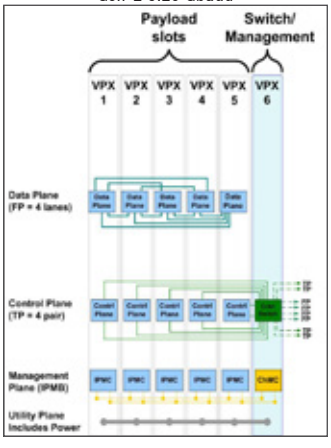
Atrenne
A Celestica Company



OF-SMART6

SMART OPEN FRAME CHASSIS

TABLE 2: CHASSIS AND POWER SUPPLY CONFIGURATION OPTIONS (continued on next page)

CONFIGURATIONS	BACKPLANE	POWER SUPPLY	OPENVPX PROFILE DIAGRAM
OF-SM6-OVP05C1AB	6U VPX 5-slot OpenVPX BKP6-CEN05-11.2.5-3 Central switch topology with 4x fat pipe data plane 2x ultra thin pipe control plane Dual fat pipe expansion plane	1150W 12 V-centric	024-900-05-CEN1-01 Gen-2 6.25 Gbaud 
OF-SM6-OVP05C1AC		1200W 5 V-centric	
OF-SM6-OVP05C1AD		ATX 500W	
OF-SM6-OVP06AB	6U VPX 6-slot OpenVPX BKP6-DIS06-11.2.15-1 Distributed topology with 5-slot full mesh fat pipe data plane No control plane No expansion plane	1150W 12 V-centric	024-900-06-01 Gen-1 3.125 Gbaud 
OF-SM6-OVP06AC		1200W 5 V-centric	
OF-SM6-OVP06AD		ATX 500W	
OF-SM6-OVP06D1AB	6U VPX 6-slot OpenVPX BKP6-DIS06-11.2.10-3 Distributed topology with 5-slot full mesh fat pipe data plane 2x thin pipe control plane No expansion plane	1150W 12 V-centric	024-900-06-DIS1-01 Gen-2 6.25 Gbaud 
OF-SM6-OVP06D1AC		1200W 5 V-centric	
OF-SM6-OVP06D1AD		ATX 500W	

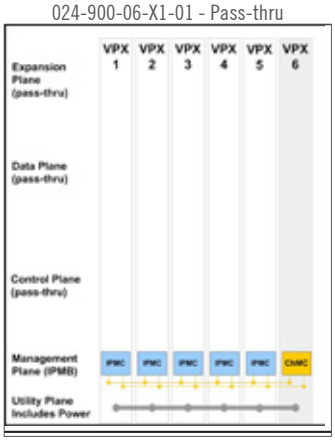
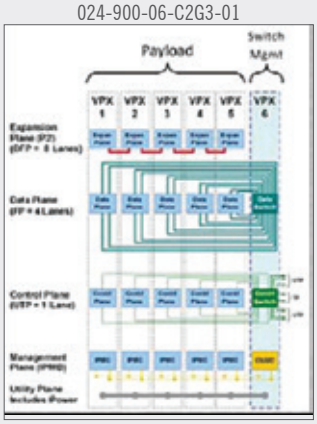
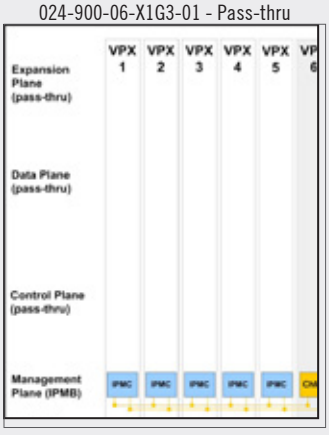
Notes:
1. Consult factory for other configurations.
2. ATX power supply versions do not comply with VITA 65 airflow requirements nor ANSI/VITA 46.0/VME power supply voltage tolerance and ripple/noise requirements.
3. +3.3VAUX is not available for remote voltage margining and current monitoring. If required, contact factory.



OF-SMART6

SMART OPEN FRAME CHASSIS

TABLE 2: CHASSIS AND POWER SUPPLY CONFIGURATION OPTIONS (continued on next page)

CONFIGURATIONS	BACKPLANE	POWER SUPPLY	OPENVPX PROFILE DIAGRAM
OF-SM6-OVP06X1AB	6U VPX 6-slot OpenVPX Pass-thru	1150W 12 V-centric	024-900-06-X1-01 - Pass-thru 
OF-SM6-OVP6C23AB	6U VPX 6-slot OpenVPX BKP6-CEN06-11.2.x-4 10.3 GBaud - NEW! Central switch topology with 4x fat pipe data plane 2x ultra thin pipe control plane Dual fat pipe expansion plane	1150W 12 V-centric	024-900-06-C2G3-01 
OF-SM6-VX708AA	6U VME64x 8-slot	750W	
OF-SM6-OVP6X13AB	6U VPX 6-slot OpenVPX Pass-thru 10.3 GBaud- NEW!	1150W 12 V-centric	024-900-06-X1G3-01 - Pass-thru 

Notes:

1. Consult factory for other configurations.
2. ATX power supply versions do not comply with VITA 65 airflow requirements nor ANSI/VITA 46.0/VME power supply voltage tolerance and ripple/noise requirements.
3. +3.3VAUX is not available for remote voltage margining and current monitoring. If required, contact factory.



OF-SMART6

SMART OPEN FRAME CHASSIS

TABLE 3: ORDERING INFORMATION

PART NUMBER: OF-SM6-	XXX	XXXX	X	X
BUS ARCHITECTURE				
(CL3) = cPCI, left hand system slot, 3.3V V(I/O), 32-bit, 33 MHz	XXX			
(CL5) = cPCI, left hand system slot, 5V V(I/O), 32-bit, 33 MHz				
(CL6) = cPCI, left hand system slot, 3.3V V(I/O), 32-bit, 66 MHz				
(VX7) = VITA 1.7 high current VME64x				
(VX8) = VME64x with P0				
(VXR) = VXS sRIO				
(OVP) = OpenVPX, VPX REDI 1.0" slot pitch per ANSI/VITA 48.0, ANSI/VITA 48.1, ANSI/VITA 46.0, VITA 46.3, VITA 46.4, VITA 46.9, VITA 46.10, VITA 65				
Backplane				
(06) = VME64x, 8 slots with P0		XXXX		
(08) = VITA 1.7 high current VME 64x, 8 slots				
(08) = VXS				
(03, 05) = cPCI				
(06) = OpenVPX 1.0" pitch, BKP6-DIS06-11.2.15.1, 6 slots, 5 payload slots w/mesh data fabric, 1 uncommitted slot w/all signals to RTM, 3.125 Gbaud				
(06C1) = OpenVPX 1.0" pitch, BKP6-CEN06-11.2.8-3, 6 slots, 5 payload slots, 1 data switch slot, star fabric topology, 6.25 Gbaud				
(05C1) = OpenVPX 1.0" pitch, BKP6-CEN05-11.2.5-3, 5 slots, 4 payload slots, 1 switch slot, 6.25 Gbaud				
(06D1) = OpenVPX 1.0" pitch, BKP6-DIS06-11.2.10-3, 6 slots, 5 payload slots w/mesh data fabric, 1 control switch, 6.25 Gbaud				
(06X1) = OpenVPX 1.0" pitch, 6-slot, no data plane, control plane, or expansion plane fabric connectivity, all fabric signals pass through to RTM connectors for user				
(6C23) = OpenVPX 1.0" pitch, BKP6-CEN06-11.2.x-4, 6 slots, 5 payload slots, 1 data and control switch slot, star fabric topology, Gen-3, 10.3 Gbaud - NEW!				
(6X13) = OpenVPX 1.0" pitch, 6-slot, no data plane, control plane, or expansion plane fabric connectivity, all fabric signals pass through to RTM connectors for user, Gen-3, 10.3 Gbaud - NEW!				
INPUT POWER				
(A) = AC 115-220 auto-ranging with US 110V cordset (consult Atrenne applications for non-US power connections)			X	
POWER SUPPLY				
(A) = Smart 750W Only for 6U cPCI/VME/VXS	+3.3V @ 60A +5V @ 60A +/-12V @ 4A +24V (fans) @ 4A			X
(B) = Smart 1150W for 12 V-centric VPX	VS1/VS2: +12V @ 62.5A VS3: +5V @ 35A	+3.3VAUX @ 10A +/-12VAUX @ 4A +24V (fans) @ 4A		
(C) = Smart 1200W for 5 V-centric VPX	VS1/VS2: +12V @ 17A VS3: +5V @ 150A	+3.3VAUX @ 10A +/-12VAUX @ 4A +24V (fans) @ 4A		
(D) = ATX 500W	VS1: +12V @ 18A VS3: +5V @ 30A (220W max total for 3.3V and 5V)	+3.3VAUX @ 30A +12VAUX @ 15A -12VAUX @ 0.8A +12V (fans) @ 15A		

Notes:
1. ATX power supply versions do not comply with VITA 65 airflow requirements nor ANSI/VITA 46.0/VME power supply voltage tolerance and ripple/noise requirements.
2. +3.3VAUX is not available for remote voltage margining and current monitoring (if required by factory)



OF-SMART6

SMART OPEN FRAME CHASSIS

ACCESSORIES

099-923: USB to i2C converter for remote control, voltage margining and current monitoring (for use with power supply options A, B and C only)

WARRANTY

This product has a one year warranty.

CONTACT INFORMATION

www.atrenne.com
sales@atrenne.com
508.588.6110 or 800.926.8722

The information in this document is subject to change without notice and should not be construed as a commitment by Atrenne, a Celestica company. While reasonable precautions have been taken, Atrenne, assumes no responsibility for any errors that may appear in this document. All products shown or mentioned are trademarks or registered trademarks of their respective owners.

© 2018 Atrenne, a Celestica company • All Rights Reserved. AIS-DS-OF-SMART6-811024A.indd

Atrenne
A Celestica Company

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP