



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

Avaya™ 1152A1 Mid Span Power Supply

Bringing data, voice, video and power easily over a standard Category 5 twisted pair cable.

The Avaya 1152A1 Mid Span Power Supply is a flexible and easy to install solution providing new cost saving, power-related efficiencies and benefits for enterprises who use data, voice, and video.



Benefits:

- Powers a wide range of Ethernet terminals, while protecting legacy endpoints.
- Powers IP phones and WLAN Access points continuously even during power failures.
- Efficiently provides power to only those IP endpoints that need power.
- Conforms to the IEEE 802.3af Standard without altering the network topology.*
- Eliminates the need for bulky local power supplies and power cords.
- Provides correct power and signaling over 100 meters.

Power Management

The Avaya 1152A1 Mid Span Power Supply connects to an existing Ethernet or Fast Ethernet infrastructure via standard Category 5 unshielded twisted-pair (UTP) and shielded twisted-pair (STP) cabling. By sending -48 V over 100 meters, Ethernet terminals (IP phones, wireless LAN access points and Web-cameras) can be powered by the 1152A1 (Figure 1). If a connected device is incompatible with the power supply, an external splitter is installed, which separates the DC voltage and the Ethernet data into two separate outputs terminating at a power port and a RJ-45 jack.

Centralized Power Distribution – Deploying Power over Ethernet in conjunction with a central UPS provides cost-effective back-up power distribution and continuous, uninterrupted operation of IP telephony during electrical power failures. IT managers can protect each IP phone with a small UPS, but the overall cost of installing and maintaining hundreds of such devices would be prohibitive.

Power Management – The 1152A1 includes enhanced power management capabilities by controlling the output power per port in the event of limited available power. Parameters of Maximum Available Power, Ports priority, and Maximum Allowable Power per Port, can be set in accordance to the specific application and customer's needs.

Advanced Auto-Sensing Algorithm – The 1152A1 features a draft-standard IEEE 802.3af auto-sensing algorithm, as well as backward compatibility to the pre-standard algorithm. This mechanism automatically detects power-ready terminals and supplies inline power. The per-port, sophisticated power control and monitoring circuit permits easy, low cost installation and continuous proper operation of devices, such as ordinary Network Interface Cards (NICs) that do not expect power on their Ethernet connection.

* Designed according to draft/revisions 3.3 of the IEEE 802.3af standard, issued October 2002.

Scalable Solution – The 1152A1 supports up to twenty-four Ethernet terminals. Multiple units can be mounted in a wiring cabinet to support additional terminals, resulting in a simple, cost effective method for expanding the network, as requirements evolve.

Smart Ethernet Wiring – The 1152A1 directly transfers data transmissions originating from Ethernet terminals over pairs 1/2 and 3/6. The Mid Span Power Supply acts as a normal patch panel for Ethernet connections, ensuring continuous and reliable performance. Power is provided only over the unused Ethernet pairs 4/5 and 7/8.

Minimal Cross Talk and Insertion Loss – Normally, introducing DC into an Ethernet network increases noise susceptibility of the system, thereby degrading the Ethernet signal. Avaya’s state-of-the-art design ensures that power distribution does not interfere with concurrent network operation. By combining high-performance, robust RJ-45 shielded connectors, intelligent wiring layout and optimized line termination the 1152A1 operates as a fully integrated device for data communication and power.

Standard Compliance/Resistive Signature Detection – The 1152A1 is fully compatible with the IEEE 802.3 standard when no inline power is supplied and with IEEE 802.3af, DTE Power via Media Dependent Interface (MDI).

Easy Installation/Easy to Use – may be installed with the data equipment in a 19-inch rack mount configuration or stacked closer to the endpoints up to four (4) units high using the optional rubber feet. The 1152A1 is a plug-and-play product. Once turned on, the unit automatically detects all PoE terminals and supplies inline power. All port interfaces are located on the front panel for easy access.

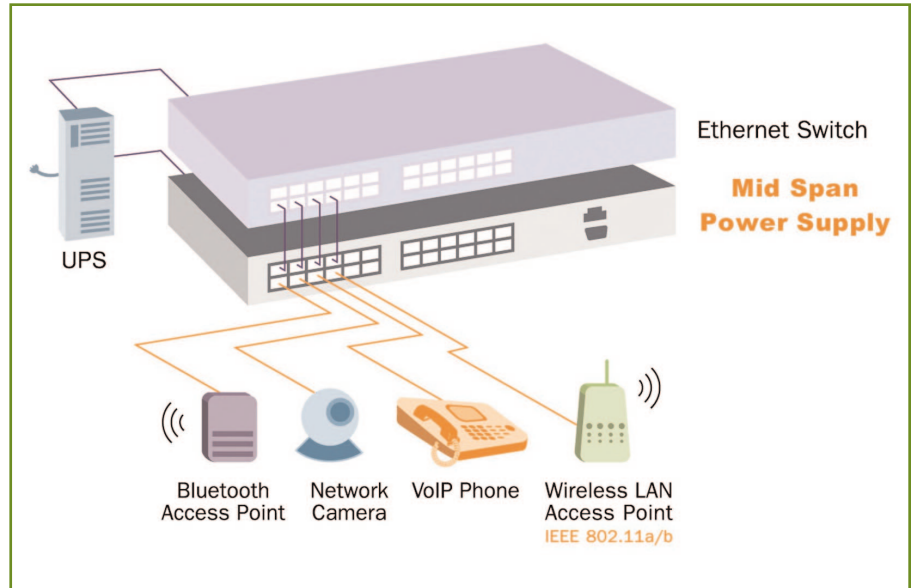


Figure 1

Specifications	
Number of Users: 24	User Indicator: Channel Power (Green/Orange)
Data Rates: 10/100 Mbps	Connectors Shielded RJ-45, EIA 568A and 568B DB-9, Female (Management)
Power over Ethernet Output Specification Pin Assignment and Polarity: 4/5 (RTN.), 7/8 (-V) Output Power Voltage: -48 Vdc User Port Power: 16.8 W (using Power management) Aggregate Power: 200 W	Environmental Conditions Operating Ambient Temperature: 32 to 104 °F (0 to 40 °C) Operating Humidity: maximum 90%, non-condensing Storage Temperature -4 to 167 °F (-20 to 75 °C) Storage Humidity: Maximum 95%, Non-condensing Operating Altitude: -1000 to 10,000 ft. (-304.8 to 3048 m)
Input Power Requirements AC Input Voltage: 90 to 264 Vac AC Frequency: 47 to 63 Hz	Thermal Rating 285 BTU
AC Input Current 3.5 A at 110 Vac, 1.8 A at 240 Vac	Regulatory Compliance CE Compliance
Volt-Amperes Rating 0.48 KVA (-48 V) 0.30 KVA (110 Vac)	Electromagnetic Emission and Immunity FCC Part 15, Class B EN55022 Class B (Emissions) EN50082-1 (Immunity)
Dimensions 1.75 x 17.0 x 11.9 in. (h * w * d) 4.4 x 43.3 x 30.2 cm (h * w * d)	Safety Approval UL 1950 CSA C22.2 No. 950 EN 60950 TUV EN 60950
Weight: 8.8 lbs (4 kg)	
Management Local LED display	
Indicators System Indicator: AC Power (Green/Orange)	

About Avaya

Leadership and Innovation in Communication

Avaya is a global leader and innovator in enterprise communications serving customers who require superior communications technology to power their business. Over 90% of the FORTUNE 500® and government organizations rely on Avaya for secure network infrastructures and reliable voice and data applications that power faster decisions, profitable transactions, and closer relationships between customers, employees, and suppliers.

Learn More

For more information about how Avaya Enterprise Class IP Solutions may be leveraged to help grow revenue and reduce costs, please contact your Avaya Client Executive, Authorized BusinessPartner or visit us at avaya.com/learnmore/ip. For more information about Avaya and our other award-winning solutions, visit avaya.com.

AVAYA



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com