ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Baumer BMMH 42S1N05C12/10600840* at our website: *Click HERE*

Absolute encoders - SSI

End shaft ø12 mm

Magnetic single- or multiturn encoders 12 bit ST / 13 bit MT

BMSH 42, BMMH 42 SSI - *MAGRES*



BMMH 42 SSI with end shaft

Features

- **Mini encoder single- or multiturn / SSI**
- **Magnetic sensing**
- **Resolution: singleturn 12 bit, multiturn 13 bit**
- **Housing ø42 mm**
- **High resistance to shock and vibrations**
- **Reset input**
- **End shaft ø12 mm**

Technical data - electrical ratings	
Voltage supply	5 VDC ±10 % 10...30 VDC
Consumption w/o load (typ.)	100 mA (5 VDC) 50 mA (24 VDC)
Initializing time (typ.)	170 ms after power on
Interface	SSI
Steps per turn	4096 / 12 bit
Absolute accuracy	±1 °
Sensing method	Magnetic
Code	Gray or binary
Code sequence	CW: ascending values with clockwise sense of rotation (looking at flange)
Inputs	SSI clock Reset input
Output circuit	SSI data: linedriver RS485
Interference immunity	DIN EN 61000-6-2
Emitted interference	DIN EN 61000-6-3
Approval	UL approval / E217823
BMSH 42	
Function	Singleturn
BMMH 42	
Function	Multiturn
Number of turns	8192 / 13 bit

Technical data - mechanical design	
Dimensions (flange)	ø42 mm
Shaft	ø12 mm end shaft
Protection DIN EN 60529	IP 65
Operating speed	≤12000 rpm (mechanical) ≤6000 rpm (electric)
Operating torque typ.	0.0093 Nm
Materials	Housing: steel Flange: aluminium
Operating temperature	-20...+85 °C
Relative humidity	95 %
Resistance	DIN EN 60068-2-6 Vibration 30 g, 10-2000 Hz DIN EN 60068-2-27 Shock 100 g, 6 ms
Connection	Connector M12, 8-pin Cable
BMSH 42	
Weight approx.	120 g
BMMH 42	
Weight approx.	190 g

Subject to modification in technic and design. Errors and omissions excepted.

BMSH 42, BMMH 42 SSI - *MAGRES*

Part number

Singleturn

BMSH 42S1 | | | **12/00** | | |

Connection
- 5 Cable radial
- N Connector M12, 8-pin, radial

Shaft
- B2 End shaft ø12 mm, IP 42, with clamping ring
- P2 End shaft ø12 mm, IP 65, with clamping ring

Resolution
- 12/00 12 bit singleturn

Voltage supply / signals
- 05C 5 VDC / SSI
- 24C 10...30 VDC / SSI

Code
- G Gray code
- N Binary code

Multiturn

BMMH 42S1 | | | **12/13** | | |

Connection
- 5 Cable radial
- N Connector M12, 8-pin, radial


Shaft
- B2 End shaft ø12 mm, IP 42, with clamping ring
- P2 End shaft ø12 mm, IP 65, with clamping ring

Resolution
- 12/13 12/13 bit single-/multiturn

Voltage supply / signals
- 05C 5 VDC / SSI
- 24C 10...30 VDC / SSI

Code
- G Gray code
- N Binary code

Data transfer

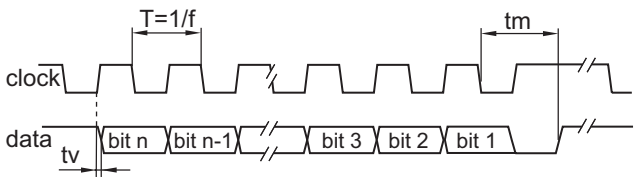

Clock frequency f	100...1000 kHz
Scan ratio of T	40...60 %
Time lag tv	200 ns
Monoflop time tm	20 µs + T/2

Accessories

Connectors and cables

10146775	Female connector M12, 8-pin, straight
10127844	Female connector M12, 8-pin, straight, shielded, 2 m
10129332	Female connector M12, 8-pin, straight, shielded, 5 m cable

Mounting accessories

10110616	Clamp set
10138610	Set of spring coupling for BMSH, BMMH 42

Subject to modification in technic and design. Errors and omissions excepted.

Absolute encoders - SSI

End shaft ø12 mm

Magnetic single- or multiturn encoders 12 bit ST / 13 bit MT

BMSH 42, BMMH 42 SSI - *MAGRES*

Terminal significance	
+Vs	Encoder supply voltage.
0 V	Encoder ground connection relating to +Vs.
Data+	Positive, serial data output of differential linedriver.
Data-	Negative, serial data output of differential linedriver.
Clock+	Positive SSI clock input. Clock+ together with Clock- forms a current loop. A current of approx. 7 mA towards Clock+ input means logic 1 in positive logic.
Clock-	Negative SSI clock input. Clock- together with Clock+ forms a current loop. A current of approx. 7 mA towards Clock- input means logic 0 in positive logic.
Zero	Input for setting a zero point anywhere within the encoder resolution. The zero setting operation is triggered by a Low impulse. Connect to +Vs after setting operation for maximum interference immunity. Impulse duration >2 ms.
Rot. direction	Ascending position values when looking at the flange and rotating the shaft clockwise.

Terminal assignment

Cable
for connection reference **-5**

Core colour	Signals	Description
brown	+Vs	Supply voltage
white	0 V	Supply voltage
grey	Data+	Data signal
pink	Data-	Data signal
green	Clock+	Clock signal
yellow	Clock-	Clock signal
blue	Zero	Zero setting input
red	d.u.	do not use
Screen	connected to housing	
Cable data	8 x 0,14 mm^2	

Connector M12 male
for connection reference **-N**

Connector	Signals	Description
Pin 1	0 V	Supply voltage
Pin 2	+Vs	Supply voltage
Pin 3	Clock+	Clock signal
Pin 4	Clock-	Clock signal
Pin 5	Data+	Data signal
Pin 6	Data-	Data signal
Pin 7	Zero	Zero setting input
Pin 8	d.u.	do not use




Trigger level	
Control inputs	**Input circuit**
Input level Low	<0,4 V (>2 ms)
Input level High	+Vs or open

Subject to modification in technic and design. Errors and omissions excepted.


BMSH 42, BMMH 42 SSI - *MAGRES*

Dimensions


BMSH/BMMH 42 SSI cable axial

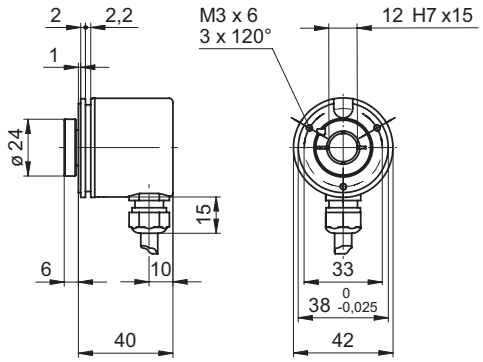


BMSH/BMMH 42 SSI cable radial

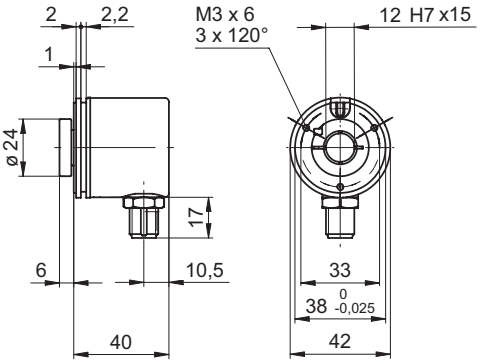

BMSH/BMMH 42 SSI connector output axial

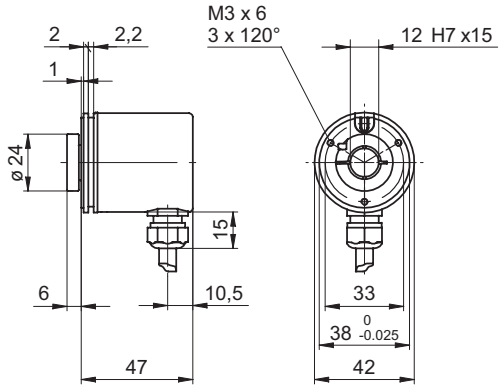

BMSH/BMMH 42 SSI connector output radial

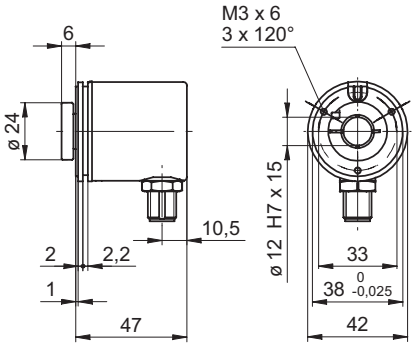

Subject to modification in technic and design. Errors and omissions excepted.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP