

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

DFC10 Series

Dual Output DC-DC Converters

The dual-output DFC10 Series provides power solutions to meet commercial and industrial requirements. With power densities above 11 watts per cubic inch (0.67 watts per cm^3), overcurrent protection, and five-sided shielded case, the DFC10 meets rigorous needs in an industry-standard case size.

The 120 kHz operating frequency of the DFC10 Series allows an increased power density while including adequate heatsinking and input/output filtering. This eliminates the need for external components in most applications.

Full overload protection is provided by pulse-by-pulse current limiting on models with 48V input.



RoHS Compliant

Key Features & Benefits

- RoHS compliant
- High power density, up to 11 watts per cubic inch (0.67 watts per cm^3)
- Efficiencies up to 79%
- Fully-isolated, fully-filtered design
- Greater than 700 V isolation
- Overcurrent protection
- Five-sided, shielded copper case
- Ultra-wide range input (4:1)

1. MODEL SELECTION

MODEL	INPUT RANGE [VDC]		OUTPUT		
	MIN	*MAX*	*[VDC]*	*[mA]*	*POWER [W]*
DFC10U24D5	9	36	±5	±850	9
DFC10U24D12	9	36	±12	±400	10
DFC10U24D15	9	36	±15	±320	10
DFC10U48D12	18	72	±12	±415	10
DFC10U48D15	18	72	±15	±330	10

Model numbers highlighted in yellow are not recommended for new designs.

2. GENERAL SPECIFICATIONS [1] – ALL MODELS

PARAMETER	CONDITIONS / DESCRIPTION	MIN	TYP	MAX	UNITS
Isolation [2]					
Isolation Voltage	Input to Output	700			VDC
Leakage Current			10		µA
Capacitance	Input to Output		350		pF
Environmental					
Case Operating Range (T_C)	No Derating	-40		85	°C
Case Functional Range[3]		-50		100	°C
Storage Range		-55		105	°C
Thermal Impedance[4]			16		°C/W
General					
MTBF	Calculated		800000		hrs
Weight			1.2/34		oz/g

NOTES

1 All parameters measured at Tc = 25°C, nominal input voltage and full rated load unless otherwise noted.

2 Case is tied to the COMMON output pin.

3 The functional temperature range is intended to give an additional data point for use in evaluating this power supply. At the low functional temperature the power supply will function with no side effects, however, sustained operation at the high functional temperature will reduce expected operational life. The data sheet specifications are not guaranteed beyond the case operating range.

4 The case thermal impedance is specified as the case temperature rise over ambient per package watt dissipated.

3. INPUT SPECIFICATIONS[1]

PARAMETER	CONDITIONS / DESCRIPTION		MIN	TYP	MAX	UNITS
Voltage Range		DFC10U24D5 / DFC10U24D12 / DFC10U24D15	9		36	VDC
		DFC10U48D12 / DFC10U48D15	18		72	
Input Current	Full Load / No Load	DFC10U24D5		450 / 10		mA
		DFC10U24D12 / DFC10U24D15		510 / 15		
		DFC10U48D12		265 / 4		
		DFC10U48D15		260 / 4		
Efficiency		DFC10U24D5		79		%
		DFC10U24D12 / DFC10U24D15 / DFC10U48D12		78		
		DFC10U48D15		79		
Switching Frequency		DFC10U24D5 / DFC10U24D12 / DFC10U24D15		100		kHz
		DFC10U48D12 / DFC10U48D15		120		
Maximum Input Overvoltage, 100 ms maximum		DFC10U24D5 / DFC10U24D12 / DFC10U24D15			45	VDC
		DFC10U48D12 / DFC10U48D15			85	
Turn –on Time, 1% Output Error				20		ms

4. OUTPUT SPECIFICATIONS[1]

PARAMETER	CONDITIONS / DESCRIPTION		MIN	TYP	MAX	UNITS
Output Voltage		DFC10U24D5		±5		VDC
		DFC10U24D12 / DFC10U48D12		±12		
		DFC10U24D15 / DFC10U48D15		±15		
Output Voltage Accuracy		DFC10U24D5	±4.95	±5.00	±5.05	VDC
		DFC10U24D12 / DFC10U48D12	±11.90	±12.00	±12.10	
		DFC10U24D15 / DFC10U48D15	±14.90	±15.10	±15.10	
Rated Load Range[3]		DFC10U24D5			±850	mA
		DFC10U24D12			±400	
		DFC10U48D12	0.0		±320	
		DFC10U24D15			±415	
		DFC10U48D15			±330	
Load Regulation[4] 25% Max Load - Max Load		DFC10U24D5 / DFC10U24D12 / DFC10U24D15		0.1	0.5	%
		DFC10U48D12 / DFC10U48D15		0.2	1.0	
Cross Regulation[5]				3		%
Line Regulation		DFC10U24D5			0.7	%
		DFC10U24D12 / DFC10U24D15		0.1	0.3	
		DFC10U48D12 / DFC10U48D15			0.5	
Short Term Stability[6]				< 0.01		% / 24 Hrs
Long Term Stability				< 0.1		% / kHrs
Noise, Peak-Peak[2]				100		mV_{pp}
RMS Noise				35		mV_{rms}
Temperature Coefficient				50	250	ppm / °C
Short Circuit Protection	24 V Models: Short Term Current Limit 48 V Models: Pulse by Pulse Current Limit					

NOTES


1. All parameters measured at Tc = 25°C, nominal input voltage and full rated load unless otherwise noted.
2. Noise measurement bandwidth is 0-20 MHz. RMS noise is measured over a 0.01-1 MHz bandwidth. To simulate standard PCB decoupling practices, output noise is measured with a 10µf tantalum and 0.01µF ceramic capacitor located 1 inch away from the converter.
3. The converter may be safely operated at any load from zero to the full rating. Dynamic response of the converter may degrade if the converter is operated with less than 25% output load.
4. Load regulation is defined for loading/unloading both outputs simultaneously. Load range is 25 to 100%.
5. Cross regulation is defined for loading/unloading one output while the other output is kept at full load. Load range is 25 to 100%.
6. Short term stability is specified after a 30 minute warmup at full load, constant line and recording the drift over a 24 hour period.


© 2017 Bel Power Solutions & Protection


5. DFC10 SERIES APPLICATION NOTES


EXTERNAL CAPACITANCE REQUIREMENTS:
No external capacitance is required for operation of the DFC10 Series. If a capacitive input source is farther than 1" from the converter, an additional capacitor may be required at the input pins for proper operation.
This input capacitor should have an ESR greater than 0.25 ohms. Input capacitors with an ESR less than 0.25 ohms may cause peaking of the input filter and actually degrade circuit performance.
External output capacitance is not required for operation. However, it is recommended that 1 µF to 10 µF of tantalum and 0.001 to 0.1 µF ceramic capacitance be selected for reduced system noise. Additional output capacitance may be added for increased filtering, but should not exceed 400 µF.

24 VOLT INPUT MODELS

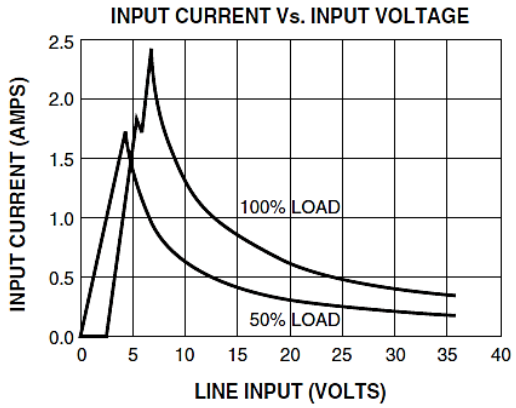

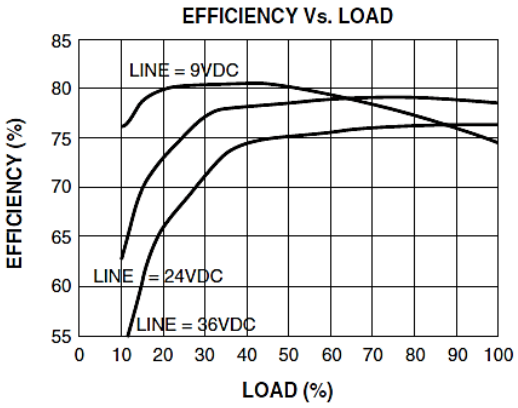

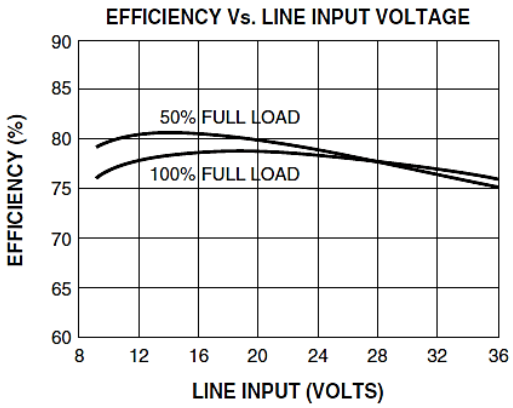

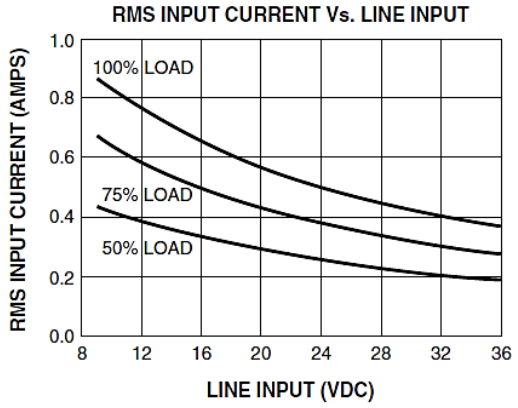

48 VOLT INPUT MODELS

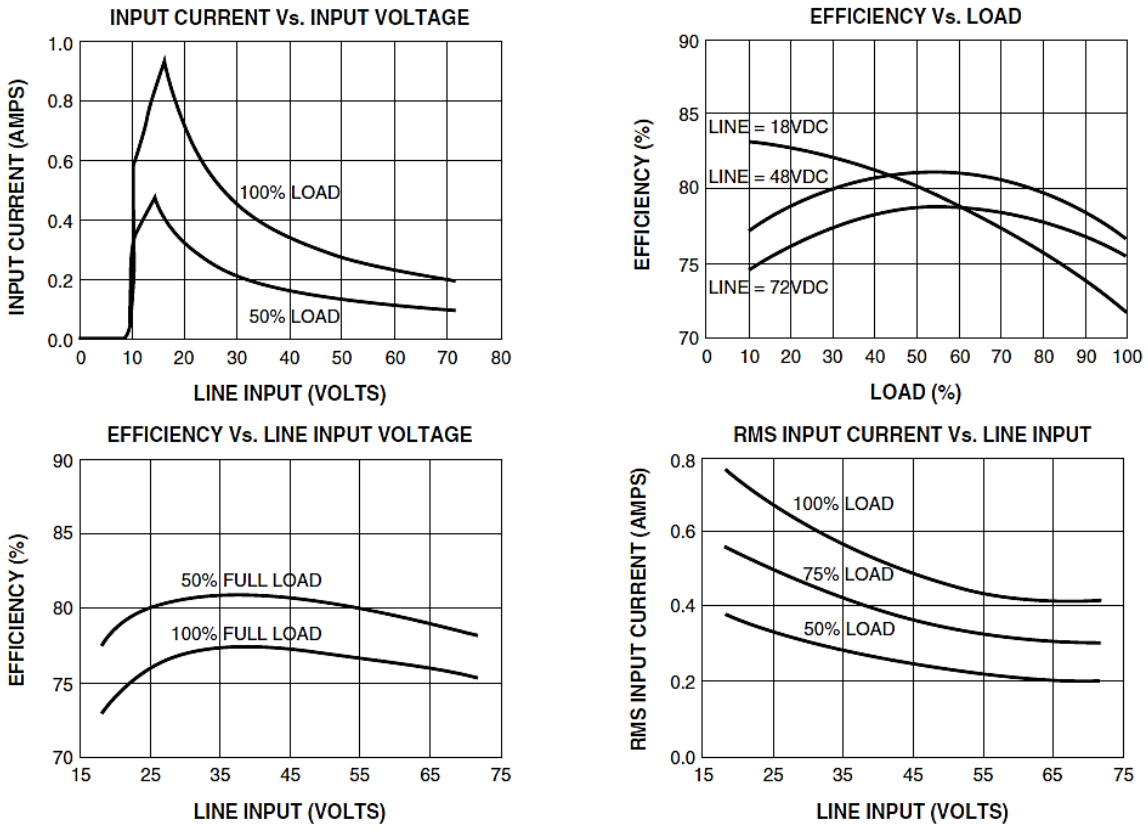


Figure 1. Typical Performance (Tc = 25°C, Vin = Nom VDC, Rated Load)

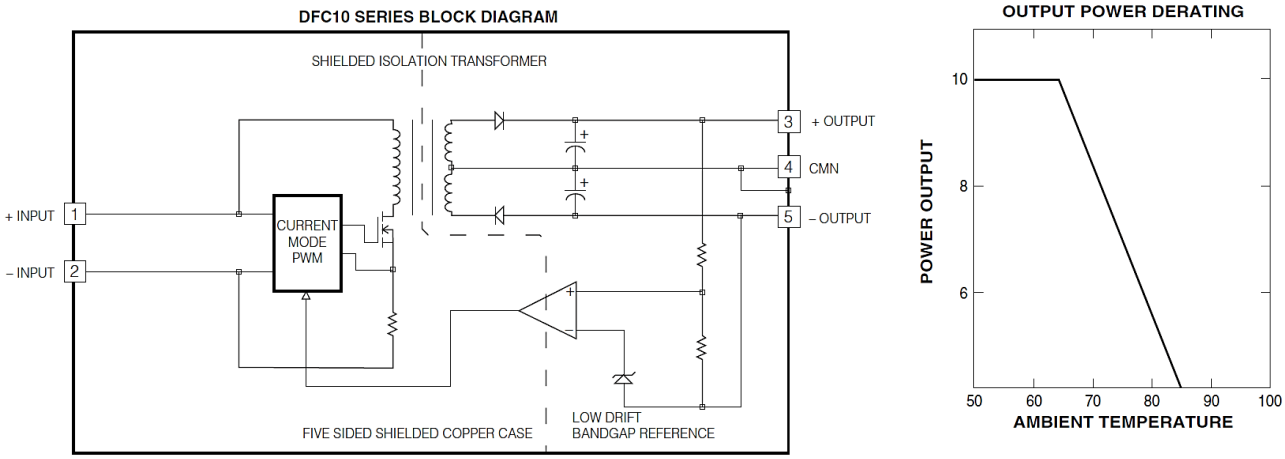


Figure 2. Typical Performance: (Tc = 25°C, Vin = Nom VDC, Rated Load)

© 2017 Bel Power Solutions & Protection

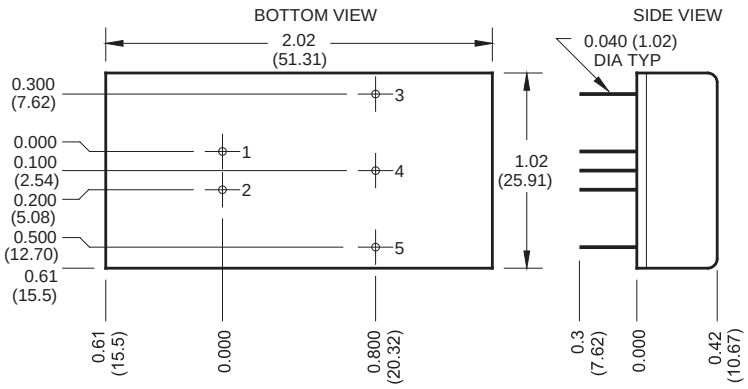


Figure 3. Mechanical Dimensions

PIN	FUNCTION
1	+ INPUT
2	- INPUT
3	+ OUTPUT
4	COMMON
5	- OUTPUT

Mechanical tolerances unless otherwise noted:

X.XX dimensions: ±0.030 inches
X.XXX dimensions: ±0.005 inches

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.
TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP