

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction


All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*


Square Flat-1® Basic Models

Bimba is a JIT manufacturer and we are able to provide FS model cylinders in ANY 0.001" stroke length increment for all option styles within our standard three-day lead time. Longer stroke lengths are also available upon request at standard lead times. Please consult Technical Assistance at 800-44-BIMBA for help.

Model FS
(Double Acting, Single End Rod)

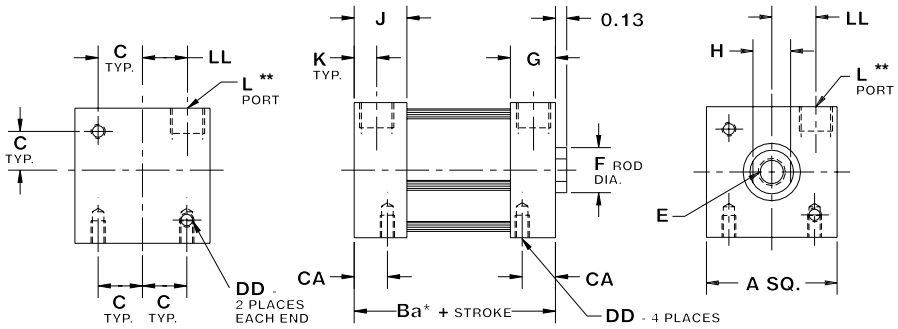

Bore sizes 3/4", 1-1/16", 1-1/2", 2"

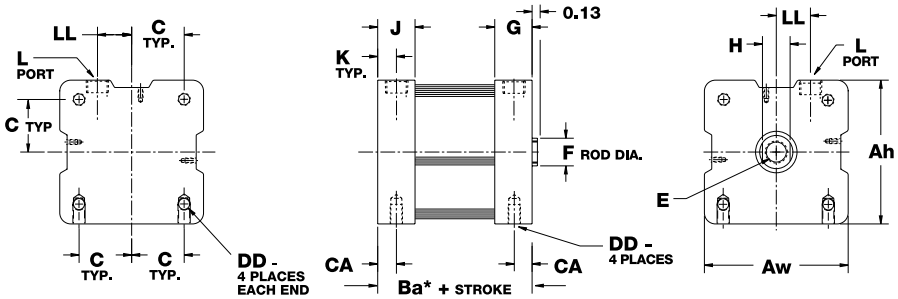

Bore sizes 2-1/2", 3", 4"

*Some options affect cylinder length; see page 156.
**Port location is on the same side for M option only.


The table below represents our standard stroke lengths.

Nominal Bore Diameter	Bore Code	Standard Stroke Length Availability															
3/4"	04	1/8"	1/4"	3/8"	1/2"	5/8"	3/4"	7/8"	1"	1-1/4"	1-1/2"	1-3/4"	2"	2-1/2"	3"	3-1/2"	4"
1-1/16"	09	1/8"	1/4"	3/8"	1/2"	5/8"	3/4"	7/8"	1"	1-1/4"	1-1/2"	1-3/4"	2"	2-1/2"	3"	3-1/2"	4"
1-1/2"	17	1/8"	1/4"	3/8"	1/2"	5/8"	3/4"	7/8"	1"	1-1/4"	1-1/2"	1-3/4"	2"	2-1/2"	3"	3-1/2"	4"
2"	31	1/8"	1/4"	3/8"	1/2"	5/8"	3/4"	7/8"	1"	1-1/4"	1-1/2"	1-3/4"	2"	2-1/2"	3"	3-1/2"	4"
2-1/2"	50	1/8"	1/4"	3/8"	1/2"	5/8"	3/4"	7/8"	1"	1-1/4"	1-1/2"	1-3/4"	2"	2-1/2"	3"	3-1/2"	4"
3"	70	1/8"	1/4"	3/8"	1/2"	5/8"	3/4"	7/8"	1"	1-1/4"	1-1/2"	1-3/4"	2"	2-1/2"	3"	3-1/2"	4"
4"	125	1/8"	1/4"	3/8"	1/2"	5/8"	3/4"	7/8"	1"	1-1/4"	1-1/2"	1-3/4"	2"	2-1/2"	3"	3-1/2"	4"


Square Flat-1® Basic Models

Model FSD
(Double Acting, Double End Rod)

Standard Strokes: 1/8", 1/4", 3/8", 1/2", 5/8", 3/4", 7/8", 1", 1-1/4", 1-1/2", 1-3/4", 2", 2-1/2", 3", 3-1/2", 4"

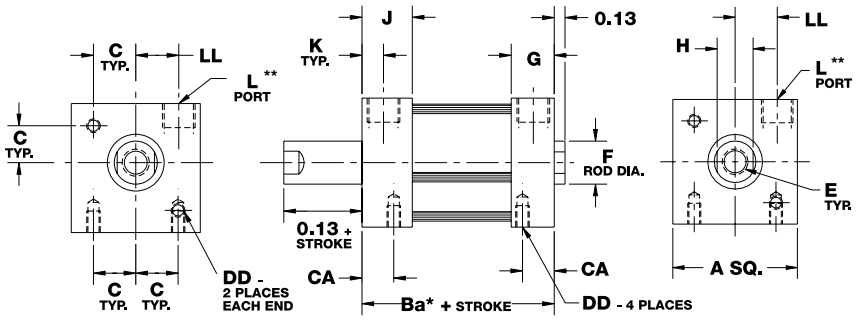

Bore sizes 3/4", 1-1/16", 1-1/2", 2"

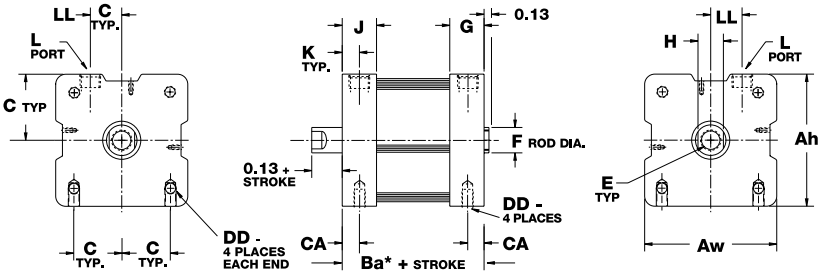


Bore sizes 2-1/2", 3", 4"


*Some options affect cylinder length; see page 156.
**Port location is on the same side for M option only.

Model FSS
(Single Acting, Spring Return, Rod Normally Retracted)

Standard Strokes: 1/8", 1/4", 3/8", 1/2", 5/8", 3/4", 7/8", 1", 1-1/4", 1-1/2", 1-3/4", 2", 2-1/2", 3", 3-1/2", 4"

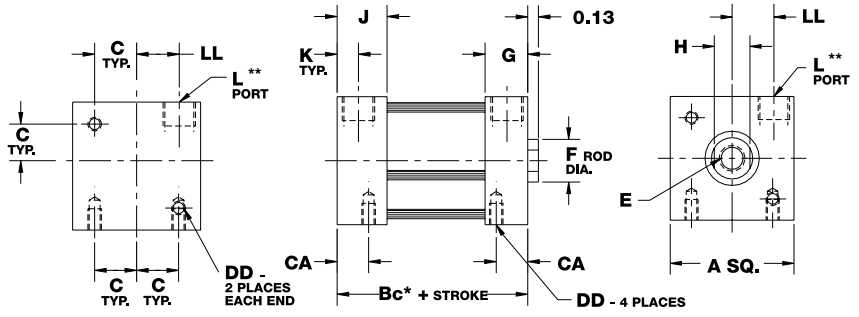

Bore sizes 3/4", 1-1/16", 1-1/2", 2"

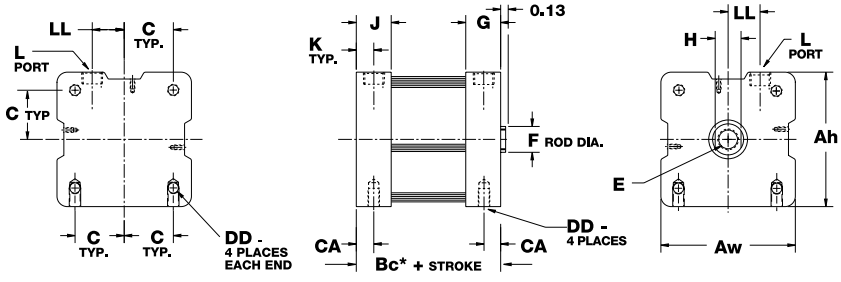

Bore sizes 2-1/2", 3", 4"

See page 157 for spring forces.
*Some options affect cylinder length; see page 156.
**Port location is on the same side for M option only.


Square Flat-1® Basic Models

Model FSR


(Reverse Acting, Spring Return, Rod Normally Extended)

Standard Strokes: 1/8", 1/4", 3/8", 1/2", 5/8", 3/4", 7/8", 1", 1-1/4", 1-1/2", 1-3/4", 2", 2-1/2", 3", 3-1/2", 4"

2"-4" Bores: 3" stroke max

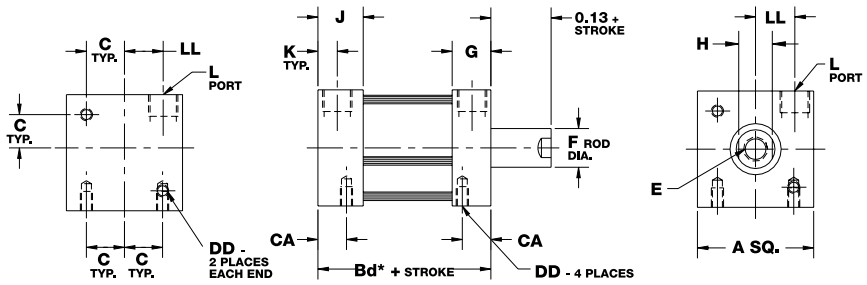

Bore sizes 3/4", 1-1/16", 1-1/2", 2"

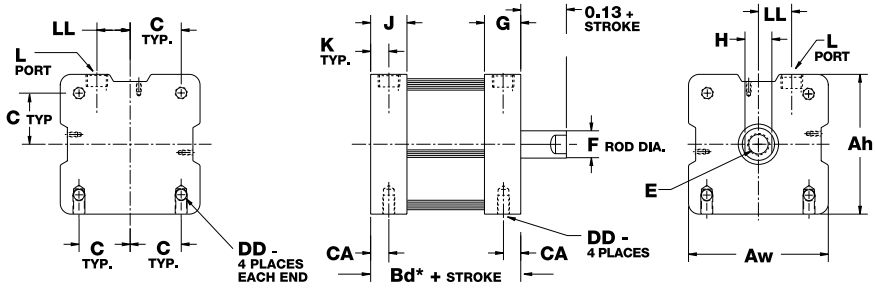

Bore sizes 2-1/2", 3", 4"

See page 157 for spring forces.

*Some options affect cylinder length; see page 156.

Dimensions (in)

Bore	A	Aw	Ah	Ba*	Bc*				Bd*			
					0-1" Stk	1.001-2" Stk	2.001-3" Stk	3.001-4" Stk	0-1" Stk	1.001-2" Stk	2.001-3" Stk	3.001-4" Stk
3/4" (04)	1.25	N/A	N/A	0.75	1.00	1.56	2.13	2.69	1.25	1.81	2.38	2.94
1-1/16" (09)	1.50	N/A	N/A	1.25	1.25	1.88	2.50	3.13	1.75	2.38	3.00	3.63
1-1/2" (17)	2.00	N/A	N/A	1.25	1.25	1.88	2.50	3.13	1.75	2.38	3.00	3.63
2" (31)	2.5	N/A	N/A	1.31	1.31	1.94	2.56	3.19	1.81	2.44	3.06	N/A
2-1/2" (50)	N/A	3.28	3.25	1.66	1.66	2.54	3.41	4.29	2.39	3.27	3.29	N/A
3" (70)	N/A	3.78	3.75	1.71	1.71	2.58	3.46	4.33	2.44	3.31	3.33	N/A
4" (125)	N/A	5.04	5.00	2.00	2.00	2.88	3.75	4.63	2.75	3.62	3.63	N/A

Bore	C	CA	DD	E Standard	E Coarse	E Depth	F	G	H	J	K	L	LL
3/4" (04)	0.38	0.28	#6-32 UNC	#10-32 UNF	#10-24 UNC	0.46	0.31	0.42	0.25	0.42	0.14	#10-32	0.30
1-1/16" (09)	0.50	0.38	#8-32 UNC	5/16-24 UNF	5/16-18 UNC	0.70	0.50	0.58	0.44	0.50	0.25	1/8 NPT	0.50
1-1/2" (17)	0.69	0.31	#10-24 UNC	3/8-24 UNF	3/8-16 UNC	0.70	0.63	0.58	0.50	0.50	0.25	1/8 NPT	0.69
2" (31)	0.88	0.38	1/4-20 UNC	1/2-20 UNF	1/2-13 UNC	0.70	0.75	0.63	0.63	0.63	0.25	1/8 NPT	0.77
2-1/2" (50)	1.18	0.42	5/16-18	1/2-20 UNF	1/2-13 UNC	0.70	0.75	0.84	0.62	0.84	0.42	1/4 NPT	0.78
3" (70)	1.44	0.44	5/16-18	5/8-18 UNF	5/8-11 UNC	0.73	0.88	0.88	0.75	0.88	0.44	1/4 NPT	0.98
4" (125)	1.81	0.50	7/16-14	3/4-16 UNF	3/4-10 UNC	0.83	1.00	1.00	0.88	1.00	0.50	3/8 NPT	1.25


Square Flat-1® Accessory Options and Dimensions (in)

Mounting Options

Pivot Attachment

Anodized aluminum alloy. Complete with mounting screws. Not necessary if ordered as part of complete Square Flat-1® cylinder (1 or 1N option).

Model	Bore	Q	S	SS	T	TT	U	W	Y	Z
PM-1	3/4" (04)	0.19	0.38	1.13	0.19	0.020	0.25	0.75	0.75	–
PM-2	1-1/16" (09)	0.19	0.38	1.25	0.25	0.020	0.25	0.81	0.75	–
PM-3	1-1/2" (17)	0.38	0.75	1.75	0.25	0.025	0.44	1.19	1.38	–
PM-4	2" (31)	0.38	0.75	2.25	0.31	0.080	0.44	1.38	1.38	–
PM-5	2-1/2" (50)	0.38	0.75	3.00	0.38	0.05	0.44	1.31	1.38	0.38
PM-6	3" (70)	0.63	1.00	3.50	0.38	0.05	0.56	1.69	1.88	0.38
PM-7	4" (125)	0.63	1.00	4.50	0.44	0.12	0.56	1.75	1.88	0.38

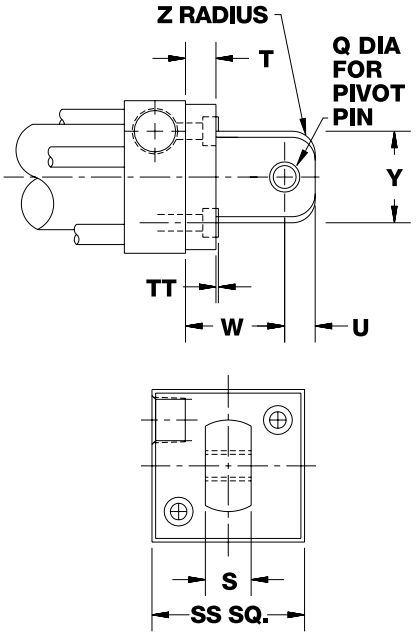

Length Adder Dimensions for Options
(Dimensional variations from standard as shown)

Bore	Length Adder		
	Low Friction Seals (L)	Magnetic Position Sensing* (M)	Low Friction Seals and Magnetic Position Sensing
3/4" (04)	0.25	0.75	0.75
1-1/16" (09)	0.38	0.50	0.50
1-1/2" (17)	0.38	0.63	0.63
2" (31)	0.38	0.63	0.63
2-1/2" (50)	0.38	0.88	0.88
3" (70)	0.50	0.88	0.88
4" (125)	0.50	0.88	0.88


*A minimum stroke of 0.38" is required to sense extending end-of-stroke position. For port locations with Option-M, see below.

Weights


Bore	Approximate Cylinder Weights (oz.)	
	Base	Adder per 1/8" of stroke
3/4" (04)	2.7	0.1
1-1/16" (09)	6.4	0.5
1-1/2" (17)	12.2	0.7
2" (31)	18.4	0.9

MRS Switch Option Dimensions

For all SQUARE Flat-1® Series Cylinder -M option, the default switch mounting post location is Position 2. To locate the post to other positions, please specify options M1 or M4. For additional tracks, please specify options T1 or T4 for the appropriate location.

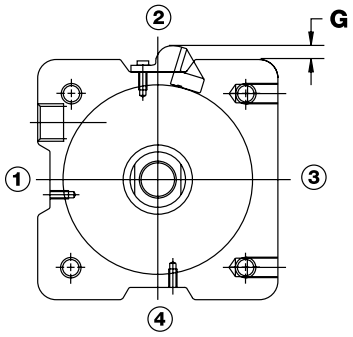

Square Flat-1®



Square Flat-II®


Bore Designator	Bore	G inch (mm)
04*	3/4" (19mm)	0.365 (9.3)
09	1-1/16" (27mm)	0.365 (9.3)
17	1-1/2" (38mm)	0.365 (9.3)
31	2" (50mm)	0.365 (9.3)
50	2-1/2" (63mm)	0.270 (6.9)
70	3" (76mm)	0.300 (7.6)
125	4" (101mm)	0.160 (4.1)

*Note: Option combinations MT1 and M1T4 cannot be ordered in combination due to interference concerns.

Square Flat-1® Accessory Options and Dimensions (in)


Options

Rod Wiper (Option W)
(Buna N standard, not available in Viton)

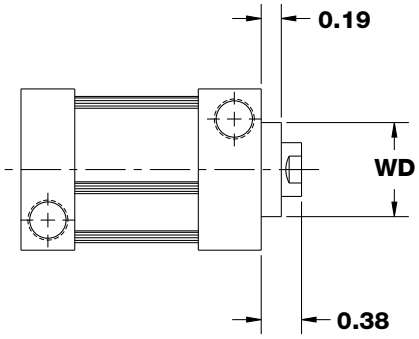

Bore	WD
3/4" (04)	0.69
1-1/16" (09)	0.88
1-1/2" (17)	1.00
2" (31)	1.12
2-1/2" (50)	1.13
3" (70)	1.25
4" (125)	1.38

Male Rod Ends (Option MT or CMT)

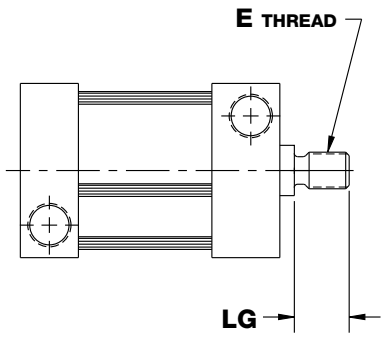

Bore	E		LG
	MT	CMT	
3/4" (04)	#10-32 UNF	#10-24 UNC	0.38
1-1/16" (09)	5/16-24 UNF	5/16-18 UNC	0.50
1-1/2" (17)	3/8-24 UNF	3/8-16 UNC	0.50
2" (31)	1/2-20 UNF	1/2-13 UNC	0.62
2-1/2" (50)	1/2-20 UNF	1/2-13 UNC	0.63
3" (70)	5/8-18 UNF	5/8-11 UNC	0.75
4" (125)	3/4-16 UNF	3/4-10 UNC	0.75

Enclosed Spring Forces

Bore	Maximum Force (lbs)	Spring Rate			
		0.12 to 1" Stroke (lbs/in)	1.001 to 2" Stroke (lbs/in)	2.001 to 3" Stroke (lbs/in)	3.001 to 4" Stroke (lbs/in)
3/4" (04)	10	6	2.5	1.76	1.25
1-1/16" (09)	11.5	6	2.5	1.76	1.25
1-1/2" (17) 2" (31)	13	5.5	2.25	1.60	1.13
2-1/2" (50) 3" (70) 4" (125)	25	6.5	2.75	1.93	1.38

FSD Hollow Rods (Option H)

Bore	Hole Diameter	
	Female Rod Thread	Male Rod Thread
3/4" (04)	0.14	0.09
1-1/16" (09)	0.22	0.16
1-1/2" (17)	0.28	0.19
2" (31)	0.38	0.25
2-1/2" (50)	0.38	0.25
3" (70)	0.44	0.31
4" (125)	0.50	0.38

Weights

Bore	Approximate Cylinder Weights (oz.)						
	FS, FSS		FSD			FSR	
	Base	Adder per 1/8" of stroke	Base	Adder per 1/8" of stroke	Adder per 1/8" of stroke for -H option	Base	Adder per 1/8" of stroke
3/4" (04)	2.2	0.1	2.4	0.2	0.15	2.2	0.1
1-1/16" (09)	5.1	0.2	5.7	0.4	0.3	5.5	0.2
1-1/2" (17)	10.1	0.3	10.5	0.6	0.5	10.4	0.3
2" (31)	14.2	0.4	16.0	0.8	0.6	15.0	0.4
2-1/2" (50)	28.6	0.4	34.2	0.6	0.5	31.2	0.4
3" (70)	40.2	0.6	49.3	0.9	0.7	43.8	0.6
4" (125)	71.6	0.6	87.7	0.9	0.7	77.7	0.6

How to Order

The Model Number for all Square Flat-1® cylinders consists of alphanumeric clusters. These designate type, bore size, stroke length, and mounting and special options. Please refer to the charts below for an example of a standard Square Flat-1® model. This is a double acting, 1-1/2" bore, 3/8" stroke, pivot mount cylinder with high temperature option.

Type	
FS	Double Acting, Single End Rod
FSD	Double Acting, Double End Rod
FSR	Reverse Acting
FSS	Single Acting

Bore Size	
04	3/4"
09	1-1/16"
17	1-1/2"
31	2"
50	2-1/2"
70	3"
125	4"

Mounting Options	
No number	Basic model
1	Pivot mount
1N	Pivot mount 90° from standard

FS - 17 0.375 - 1 V

Stroke Length	
0.125	1/8"
0.25	1/4"
0.375	3/8"
etc.	

Options (Enter in alphabetical order, except for EE which is last)	
B	Bumpers, both ends[1]
BF	Bumper, front only[1]
BR	Bumper, rear only[1]
CFT	Coarse female rod thread (fine thread standard) (see page 155)
CMT	Coarse male rod thread (see page 157)
G	Magnalube® G
H	Hollow rod (double end models only) (see page 157)
J	Failsafe operation (FSS models)
L	Low friction seals (see table page 156 for length adders)
M, M1, M4	Magnetic position sensing. Switch post designed for HC and HK style Hall Effect switches (see table page 156 for length adders and envelope dimensions)
MT	Male rod end (fine thread) (see page 157)
NT	Non-threaded rod
Q	Low temperature operation (-40° F to 200° F)
T1, T4	Additional Hall Effect switch mounting post located in position #1 or #4
V	High temperature option (0° F to 400° F)
W	Rod wiper (Buna-N, see page 157)[2]
X	X-ring piston seal[3]
Y	Molycoat (MoS_2 I.D. coating)
EE0.375	3/8" extra rod extension, etc.
EE1	1" extra rod extension, etc.

[1] Stroke is reduced by .03" per end (.06" for option B); FSS, BR only; FSR, BF only.
[2] If magnetic position sensing is specified with option V, standard Buna-N based magnet will be provided. Magnetic position sensing is not reliable above 200° F.
[3] Optional piston seal which may improve performance in certain short stroke applications where back pressure due to flow controls or reduced exhaust flow may exist.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP