ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction


All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *B&K Precision 2120B* at our website: *Click HERE*

Data Sheet

30 MHz Dual Trace Analog Oscilloscope With Probes

Model 2120B

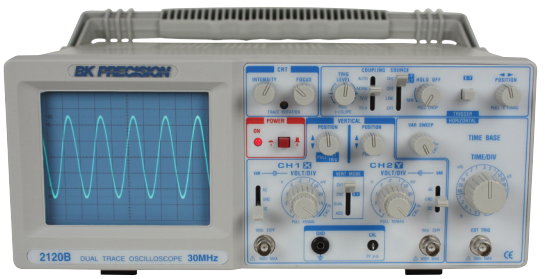

B&K Precision's model 2120B is a dual trace oscilloscope that offers high performance at a low price. Most competitor's entry level oscilloscopes have a 20 MHz bandwidth, while B&K Precision's models 2120B has a bandwidth of 30 MHz. This oscilloscope is built by and backed by B&K Precision, a company that has been selling reliable, durable, value priced test instruments for over 50 years.

- Dual or single trace operation
- 5 mV/div sensitivity
- AUTO/NORM triggered sweep operation with AC, TVH, TVV and line coupling
- Compact low profile design
- cUL certified

c UL us LISTED

Specifications	2120B
VERTICAL AMPLIFIERS (CH 1 and CH 2)	
Sensitivity	5 mV/div to 5 V/div, 1 mV/div to 1 V/div at X5
Attenuator	10 steps in 1-2-5 sequence. Vernier control provides full adjustment between steps
Accuracy	±3%, ±5% at X5
Input Resistance	1 MΩ ±2%
Input Capacitance	25 pF ±10pF
Frequency Response	5 mV to 5 V/div: DC to 30 MHz (-3dB). X5: DC to 10 MHz (-3dB)
Rise Time	12 ns (Overshoot ≤5%)
Operating Modes	CH 1: CH 1, single trace
CH 2	CH 2, single trace
ALT	dual trace, alternating
CHOP	dual trace, chopped
ADD	agebraic sum of CH 1 + CH 2
Polarity Reversal	CH 2 only
Maximum Input Voltage	400 V (DC + AC peak)
SWEEP SYSTEM	
Sweep Speed	0.1 μs/div to 2 s/div in 1-2-5 sequence, 23 steps, Vernier control provides fully adjustable sweep time between steps.
Accuracy	±3%
Sweep Magnification	10x
TRIGGERING	
Triggering Modes	AUTO (free run) or NORM, TV-V, TV-H
Trigger Source	CH 1, CH 2, ALT, EXT, LINE
Maximum External Trigger Voltage	300 V (DC + AC peak)
Trigger Coupling	AC 30 Hz to 30 MHz
TV H	Used for triggering from horizontal sync pulses
TV V	Used for triggering from vertical sync pulses
TRIGGER SENSITIVITY	
Auto	Bandwidth:100 Hz-30 MHz, Internal: 1.5 div, External: 100 mV
Norm	Bandwidth: DC to 30 MHz, Internal: 1.5 div, External: 100 mV
TV V	Bandwidth: 20 Hz-1 kHz, Internal: .5 div, External: 100 mV
TV H	Bandwidth:1 kHz-100 kHz, Internal: .5 div, External: 100 mV
HORIZONTAL AMPLIFIER (Input through channel 2 input)	
X-Y Mode	Switch selectable using X-Y switch. CH 1: X axis, CH 2: Y axis
Sensitivity	Same as vertical channel 1
Input Impedance	Same as vertical channel 1
Frequency Response	DC to 1 MHz typical (-3 dB)
X-Y Phase Difference	Approximately 3° at 50 kHz
Maximum Input Voltage	Same as vertical channel 1
CRT	
Type	Rectangular with internal graticule
Display Area	8 x 10 div (1 div = 1 cm)
Accelerating Voltage	2 kV
Phosphor	P31
Trace Rotation	Electrical, front panel adjustable
Calibrating Voltage	1 kHz (±10%) Positive Square Wave, 2 V p-p (±3%)
GENERAL	
Temperature	Within Specified Accuracy: 50° to 95°F (10° to 35°C), ≤85% RH Full Operation: 32° to 104°F (0° to 40°C), ≤85% RH Storage: -4° to 158°F (-20° to +70°C
Power Requirements	100/120/220/240 VAC ±10%, 50/60 Hz, approximately 40 W.
Dimensions (WxHxD)	7 x 14.5 x 17.25" (180 x 370 x 440 mm)
Weight	Approximately 17.2 lbs (7.8 kg)
	Two Year Warranty
Supplies Accessories	Instruction Manual, Two PR-33A x1/x10 Probes or equivalent, AC Power Cord, Spare Fuse
Optional Accessories	PR-32A Demodulator Probe, PR-37A x1/x10/REF. Probe, PR-100A x100 Probe, PR-55 High Voltage x1000 Probe, LC-210A Carrying Case

Technical data subject to change
© B&K Precision Corp. 2012
v013012

www.bkprecision.com
Tel.: 714.921.9095

B+K PRECISION
ELECTRONIC TEST INSTRUMENTS

Artisan Scientific - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisan-scientific.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP