ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Bussmann 15.5CAVH0.5e* at our website: *Click HERE*

- **British Standard VT Fuse Links.**
- **A range of voltage transformer primary Fuse Links to BS2692-1 and IEC60282-1.**
- **Wide range of ratings from 1 kV to 36 kV.**
- **3.15 Amp industry standard current ratings.**
- **CAV range with ratings from 3.6kV to 38kV.**



Bussmann Voltage and Auxiliary Transformer Fuse Links

Bussmann manufacture a wide range of voltage transformer (VT) fuse links. In North America they are referred to as Potential Transformer fuses. These fuse links are designed for use in the primary side of voltage transformers to provide system isolation in the event of faults occurring in the transformer circuit.

Voltage transformer fuse links, have a preferred current rating of 3.15A. Experience has shown that there is a risk of spurious operation by transient overcurrents where lower current ratings are used. In addition, in order to minimise the risk of deterioration of the fine fuse elements caused by corona, it is desirable to mount the fuse links so that the earthed metal is not in the immediate vicinity of the part of the barrel between the ferrules.

Higher current and ‘E’ ratings are available for special applications, including auxiliary transformers.

A range of VT fuse links with a breaking capacity of 200kA for use at the output terminals of large turbo alternators can also be ordered. For further information, please contact Bussmann application engineers.

Types prefixed ‘A’ or ‘N’ are suitable for use in Air only. Types prefixed ‘O’ may be used under oil.

- **For DIN dimensioned voltage transformer and auxiliary transformer fuse links, please refer to DIN dimensioned fuse link section.**

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Selection Table

Table of ratings for voltage transformer fuses 1.1 - 36kV


Part Number	Voltage Rating U_n kV	Current Rating I_n A	Breaking Capacity I_1 kA	Cold Resistance Ω	Joule Intergral (I^2t) A²s Minimum Pre-Arcing	Joule Intergral (I^2t) A²s Maximum Total Clearing	Length mm	Diameter Ø mm	Weight kg
1.1NBUN*2	1.1	2	50	0.145	$6.3X10^0$	$1.8X10^1$	86	25.4	0.12
1.1NBUN*3.15	1.1	3.15	50	0.107	$1.2X10^1$	$3.4X10^1$	86	25.4	0.12
1.1NBUN*6.3	1.1	6.3	50	0.065	$3.2X10^1$	$9.2X10^1$	86	25.4	0.12
3.6ABWN*3.15	3.6	3.15	50	0.358	$6.3X10^0$	$1.8X10^1$	142	25.4	0.19
3.6ABWN*6.3	3.6	6.3	50	0.120	$4.8X10^1$	$3.1X10^2$	142	25.4	0.19
3.6ABCN*3.15	3.6	3.15	50	0.358	$6.3X10^0$	$1.8X10^1$	195	25.4	0.245
3.6ABCN*6.3	3.6	6.3	50	0.120	$4.8X10^1$	$3.1X10^2$	195	25.4	0.245
3.6ABCN*10	3.6	10	50	0.080	$1.1X10^2$	$7.0X10^2$	195	25.4	0.245
5.5AMWNA0.5E	5.5	0.5	50	32.5	$1.2X10^0$	$3.5X10^0$	142	20.6	0.114
5.5AMWNA1E	5.5	1	50	16.0	$5.0X10^0$	$1.4X10^1$	142	20.6	0.114
5.5AMWNA2E	5.5	2	50	0.584	$4.0X10^0$	$1.2X10^1$	142	20.6	0.114
5.5AMWNA3E	5.5	3	50	0.320	$1.8X10^1$	$1.1X10^2$	142	20.6	0.114
5.5AMWNA4E	5.5	4	50	0.190	$4.6X10^1$	$3.0X10^2$	142	20.6	0.114
5.5AMWNA5E	5.5	5	50	0.147	$7.9X10^1$	$5.1X10^2$	142	20.6	0.114
5.5ABWNA0.5E	5.5	0.5	50	50.2	$0.49X10^0$	$1.4X10^0$	142	25.4	0.19
5.5ABWNA1E	5.5	1	50	25.1	$2.0X10^0$	$5.7X10^0$	142	25.4	0.19
5.5ABWNA2E	5.5	2	50	1.08	$1.2X10^0$	$3.4X10^0$	142	25.4	0.19
5.5ABWNA3E	5.5	3	50	0.469	$6.3X10^0$	$1.8X10^1$	142	25.4	0.19
5.5ABWNA5E	5.5	5	50	0.199	$3.2X10^1$	$2.0X10^2$	142	25.4	0.19
7.2ABWN*3.15	7.2	3.15	45	0.614	$6.3X10^0$	$4.0X10^1$	142	25.4	0.19
7.2ABWN*6.3	7.2	6.3	45	0.240	$4.8X10^1$	$3.1X10^2$	142	25.4	0.19
7.2ABCN*3.15	7.2	3.15	45	0.614	$6.3X10^0$	$4.0X10^1$	195	25.4	0.245
7.2ABCN*6.3	7.2	6.3	45	0.240	$4.8X10^1$	$3.1X10^2$	195	25.4	0.245
7.2OBCN*3.15	7.2	3.15	45	0.614	$6.3X10^0$	4.0X10	195	25.4	0.245
7.2OBCN*6.3	7.2	6.3	45	0.240	$4.8X10^1$	$3.1X10^2$	195	25.4	0.245
7.2OBWN*3.15	7.2	3.15	45	0.614	$6.3X10^0$	4.0X10	142	25.4	0.19
7.2OBWN*6.3	7.2	6.3	45	0.240	$4.8X10^1$	$3.1X10^2$	142	25.4	0.19
12ABCN*3.15	12	3.15	45	1.21	$6.3X10^0$	$1.8X10^1$	195	25.4	0.245
12OBCN*3.15	12	3.15	45	1.21	$6.3X10^0$	$1.8X10^1$	195	25.4	0.245
15.5ABFN*3.15	15.5	3.15	32	1.24	$6.3X10^0$	$4.0X10^1$	254	25.4	0.31
15.5OBFN*3.15	15.5	3.15	32	1.24	$6.3X10^0$	$4.0X10^1$	254	25.4	0.31
17.5ABGN*3.15	17.5	3.15	35	1.45	$6.3X10^0$	$4.0X10^1$	359	25.4	0.43
17.5OBGN*3.15	17.5	3.15	35	1.45	$6.3X10^0$	$4.0X10^1$	359	25.4	0.43
24ABGN*3.15	24	3.15	25	2.00	$6.3X10^0$	$4.0X10^1$	359	25.4	0.43
24OBGN*3.15	24	3.15	25	2.00	$6.3X10^0$	$4.0X10^1$	359	25.4	0.43
36OBGN*3.15	36	3.15	31.5	2.05	$1.2X10^1$	$7.7X10^1$	359	25.4	0.43

A 36kV AGBN* 3.15A is also available for certain indoor applications. Please contact Bussmann's application engineers for further information.

* The last letter of the ordering code on these items is normally either 'A' or '22', please refer to 'how to order' page 61 for an explanation.

Fuse Link type: TAG type "A" Ferrule and "22"


FUSE LINK TYPE	A	B	D
NBUN*	86	17.5	25.4
ABWNA	142	30	25.4
AMWNA	142	16	20.5
OBWN*	142	30	25.4
ABCN*	195	30	25.4
OBCN*	195	30	25.4
ABFN*	254	30	25.4
OBFN*	254	30	25.4
ABGN*	359	30	25.4
OBGN*	359	30	25.4

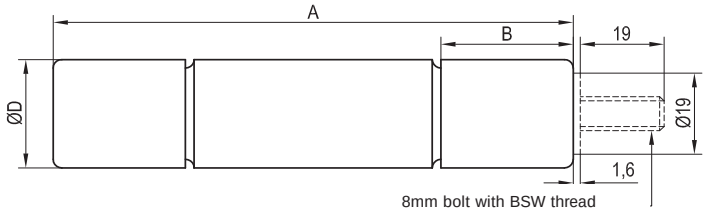

Ferrule Fuse Link Tag type "A" shown in full lines and "22" Tag shown in dotted lines

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Time current characteristics for 3.6 to 36kV VT Fuse Links of 3.15, 6.3 and 10 Amp ratings

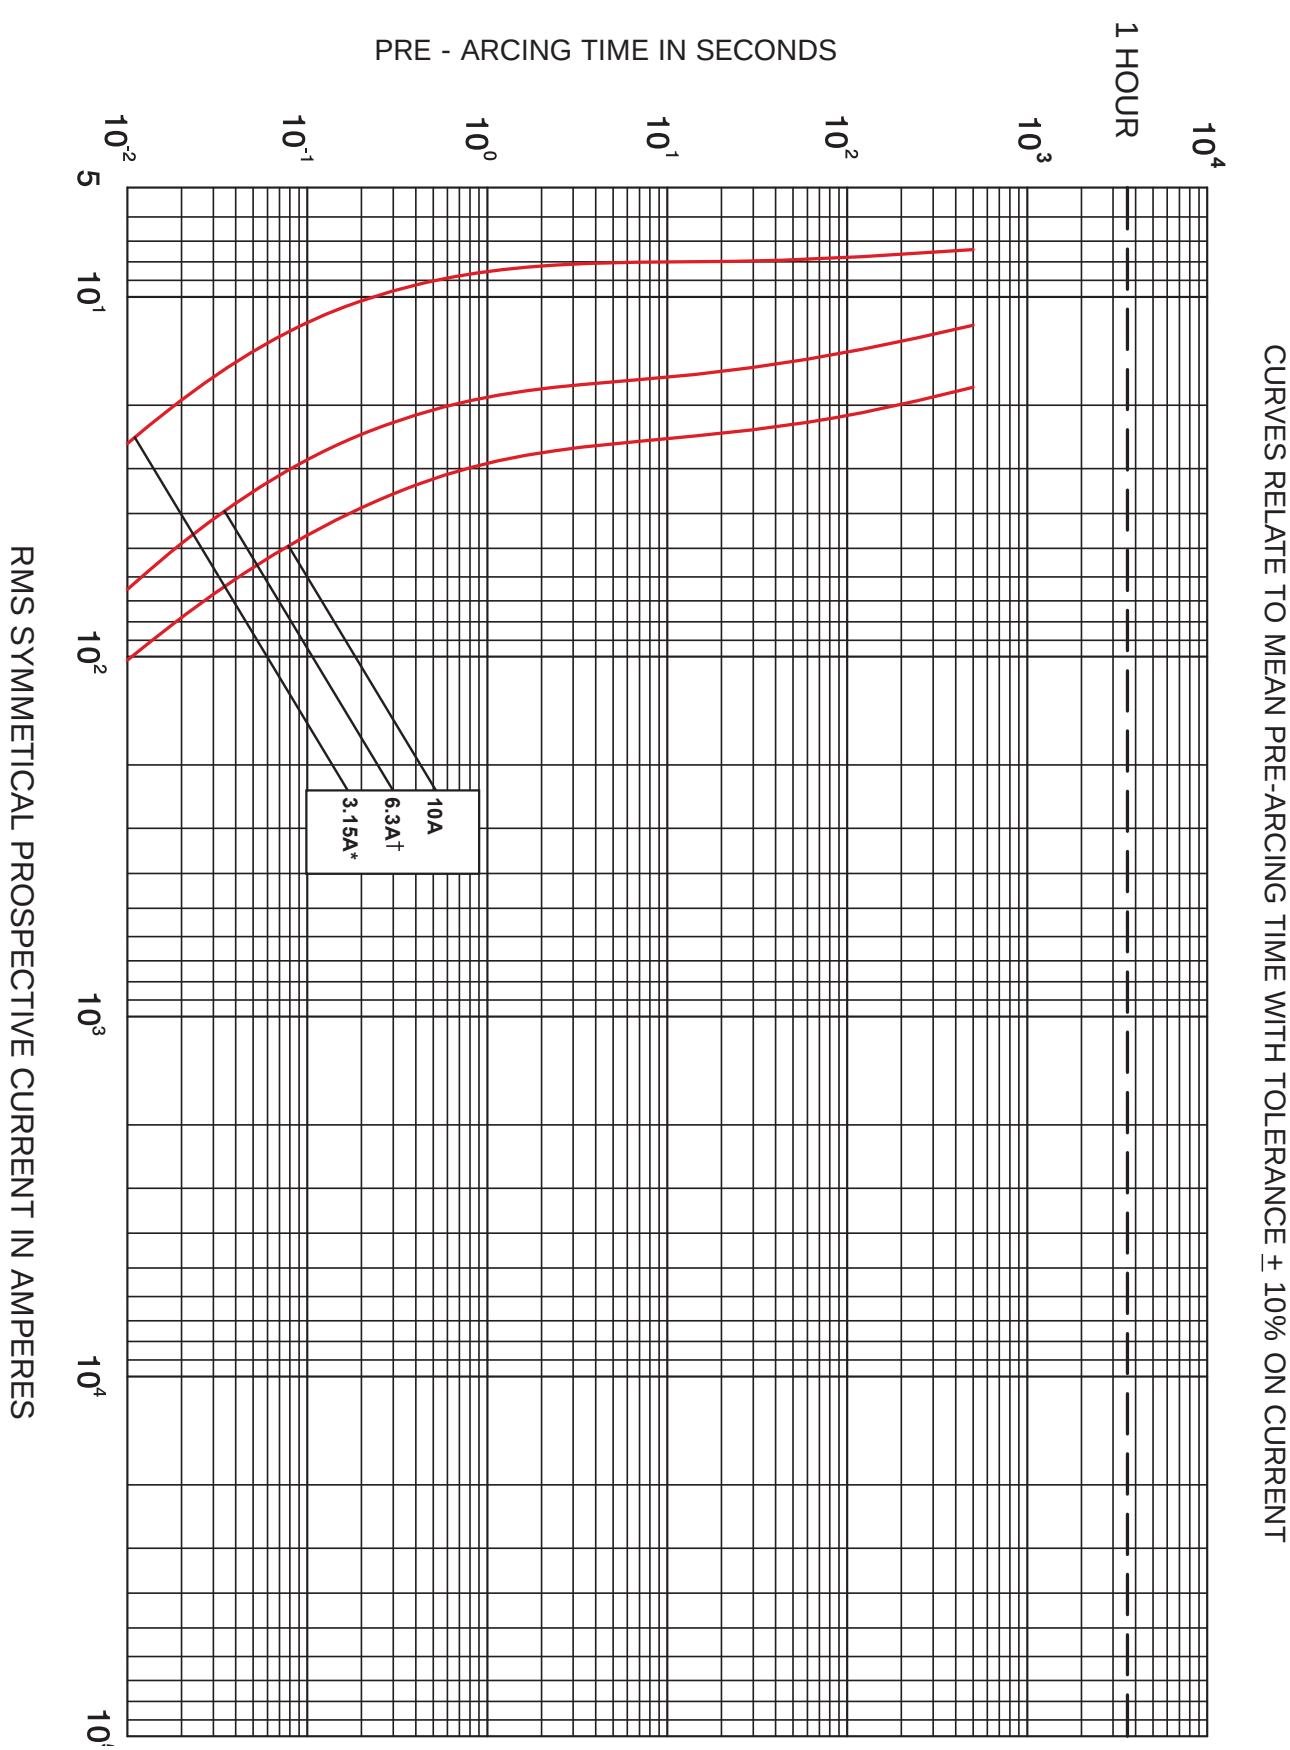

* Curve valid for all 3.15A ratings shown in the selection table.
† Curve valid for all 6.3A ratings shown in the selection table.


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Time current characteristics for E rated 5.5kV VT Fuse Links, fuse type ABWNA (minimum melting times)

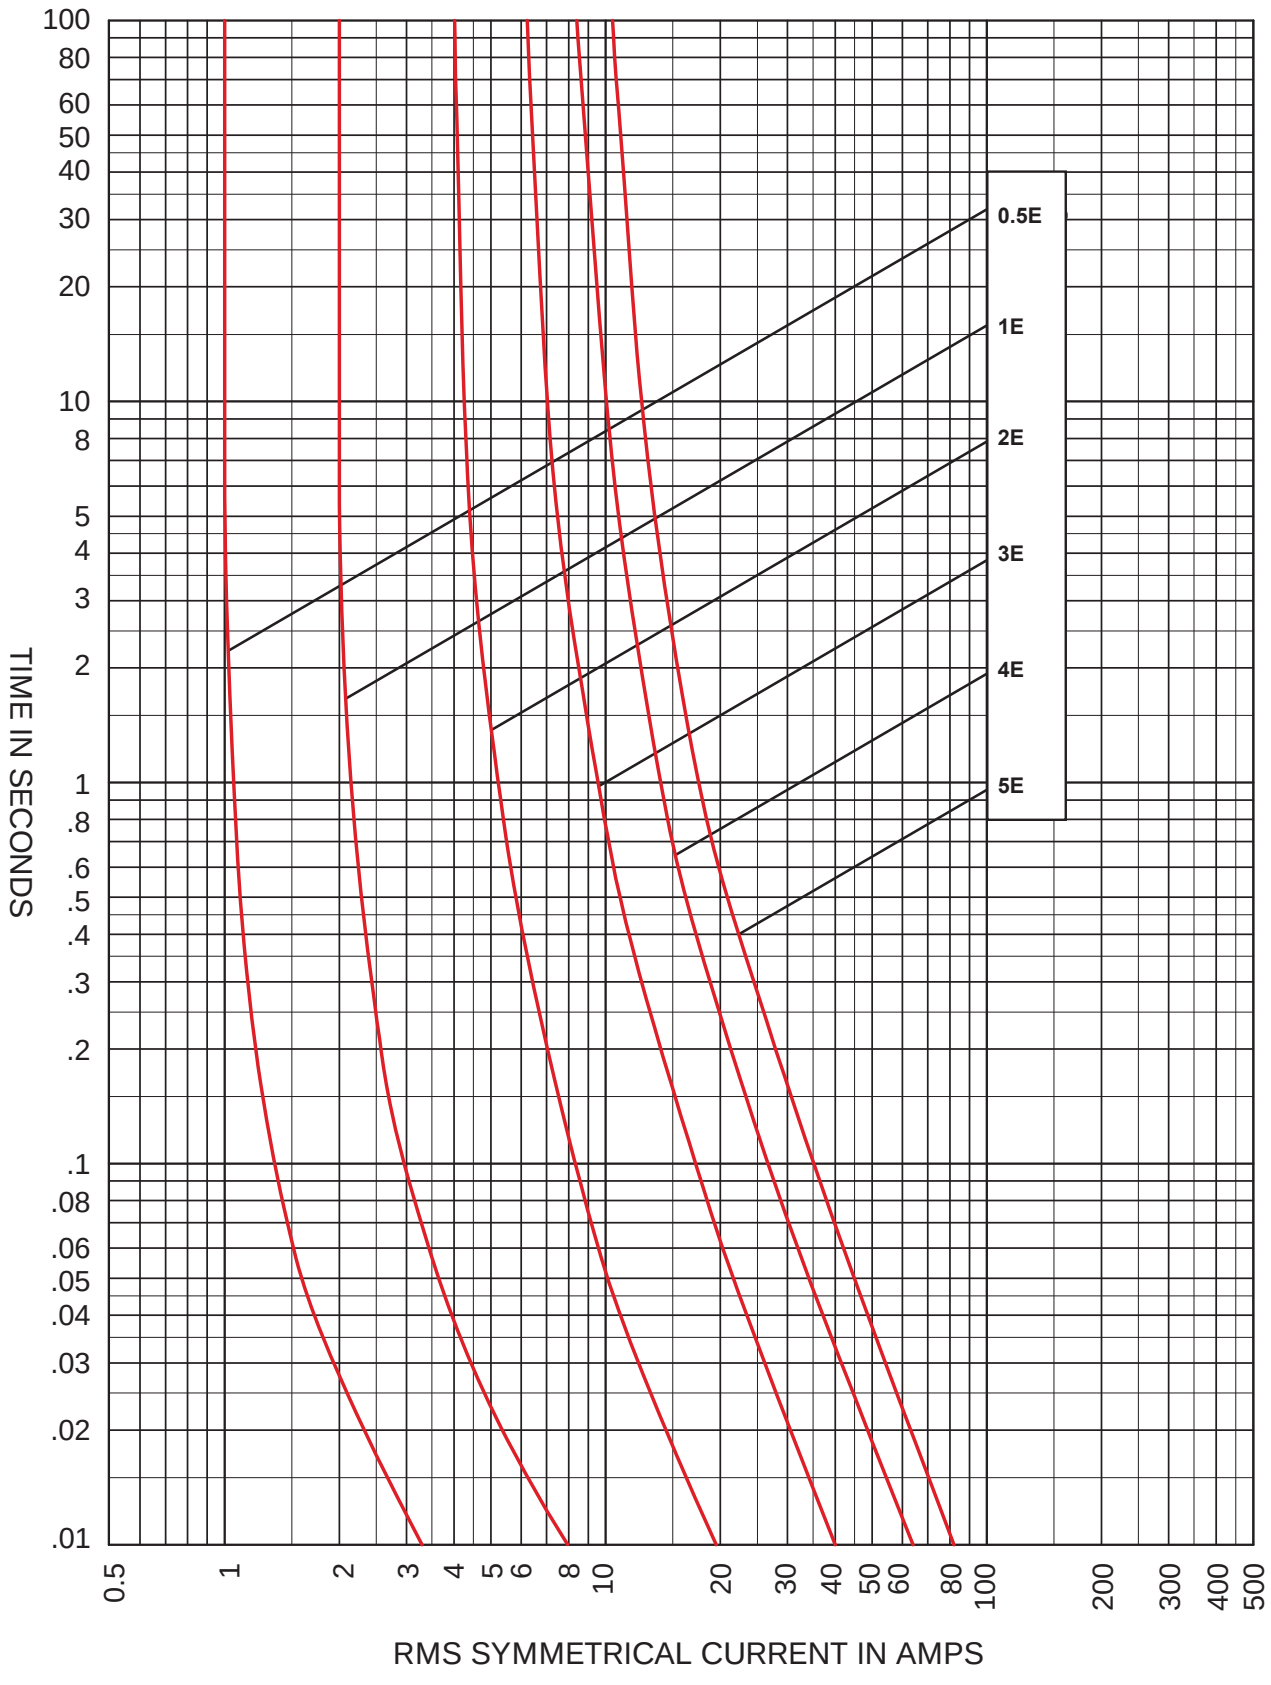


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Time current characteristics for E rated 5.5kV VT Fuse Links, fuse type ABWNA (maximum melting times)

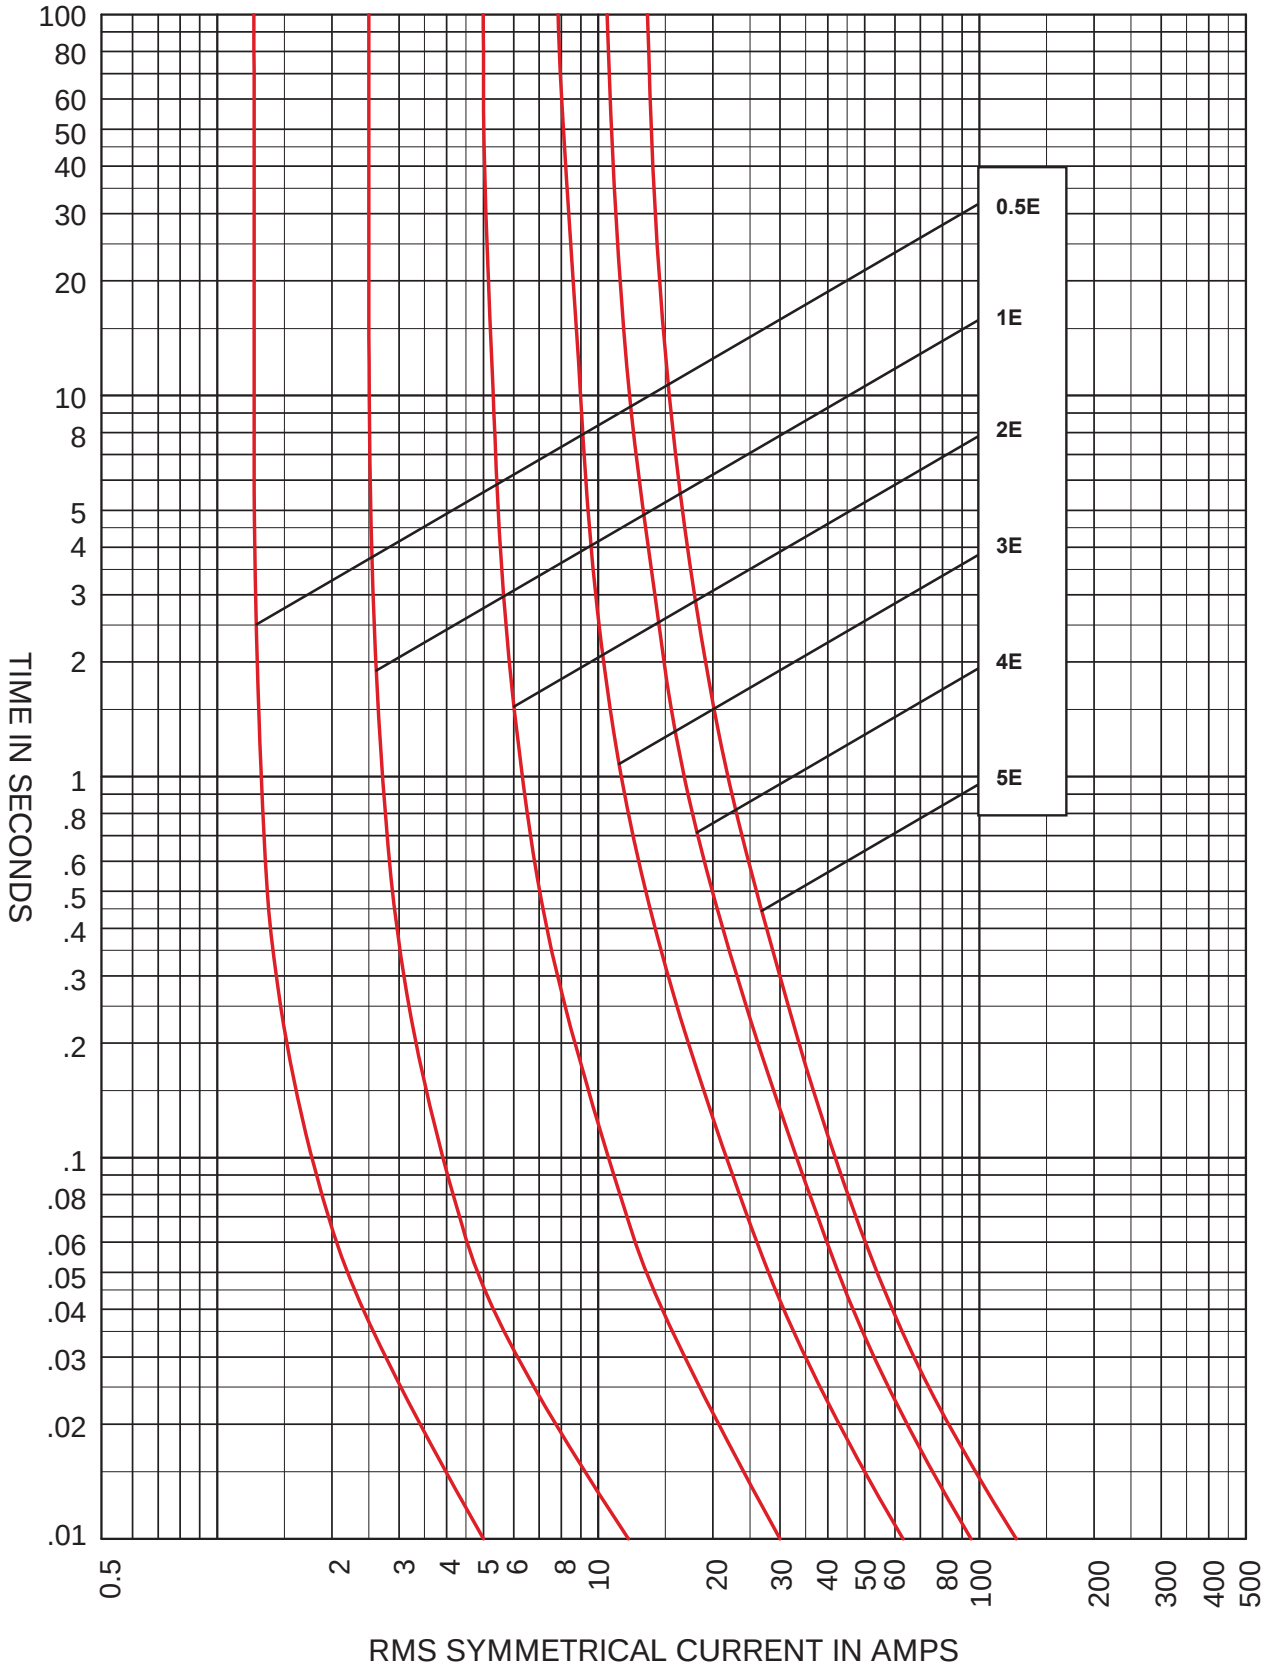


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Time current characteristics for E rated 5.5kV VT Fuse Links, fuse type AMWNA (minimum melting times)

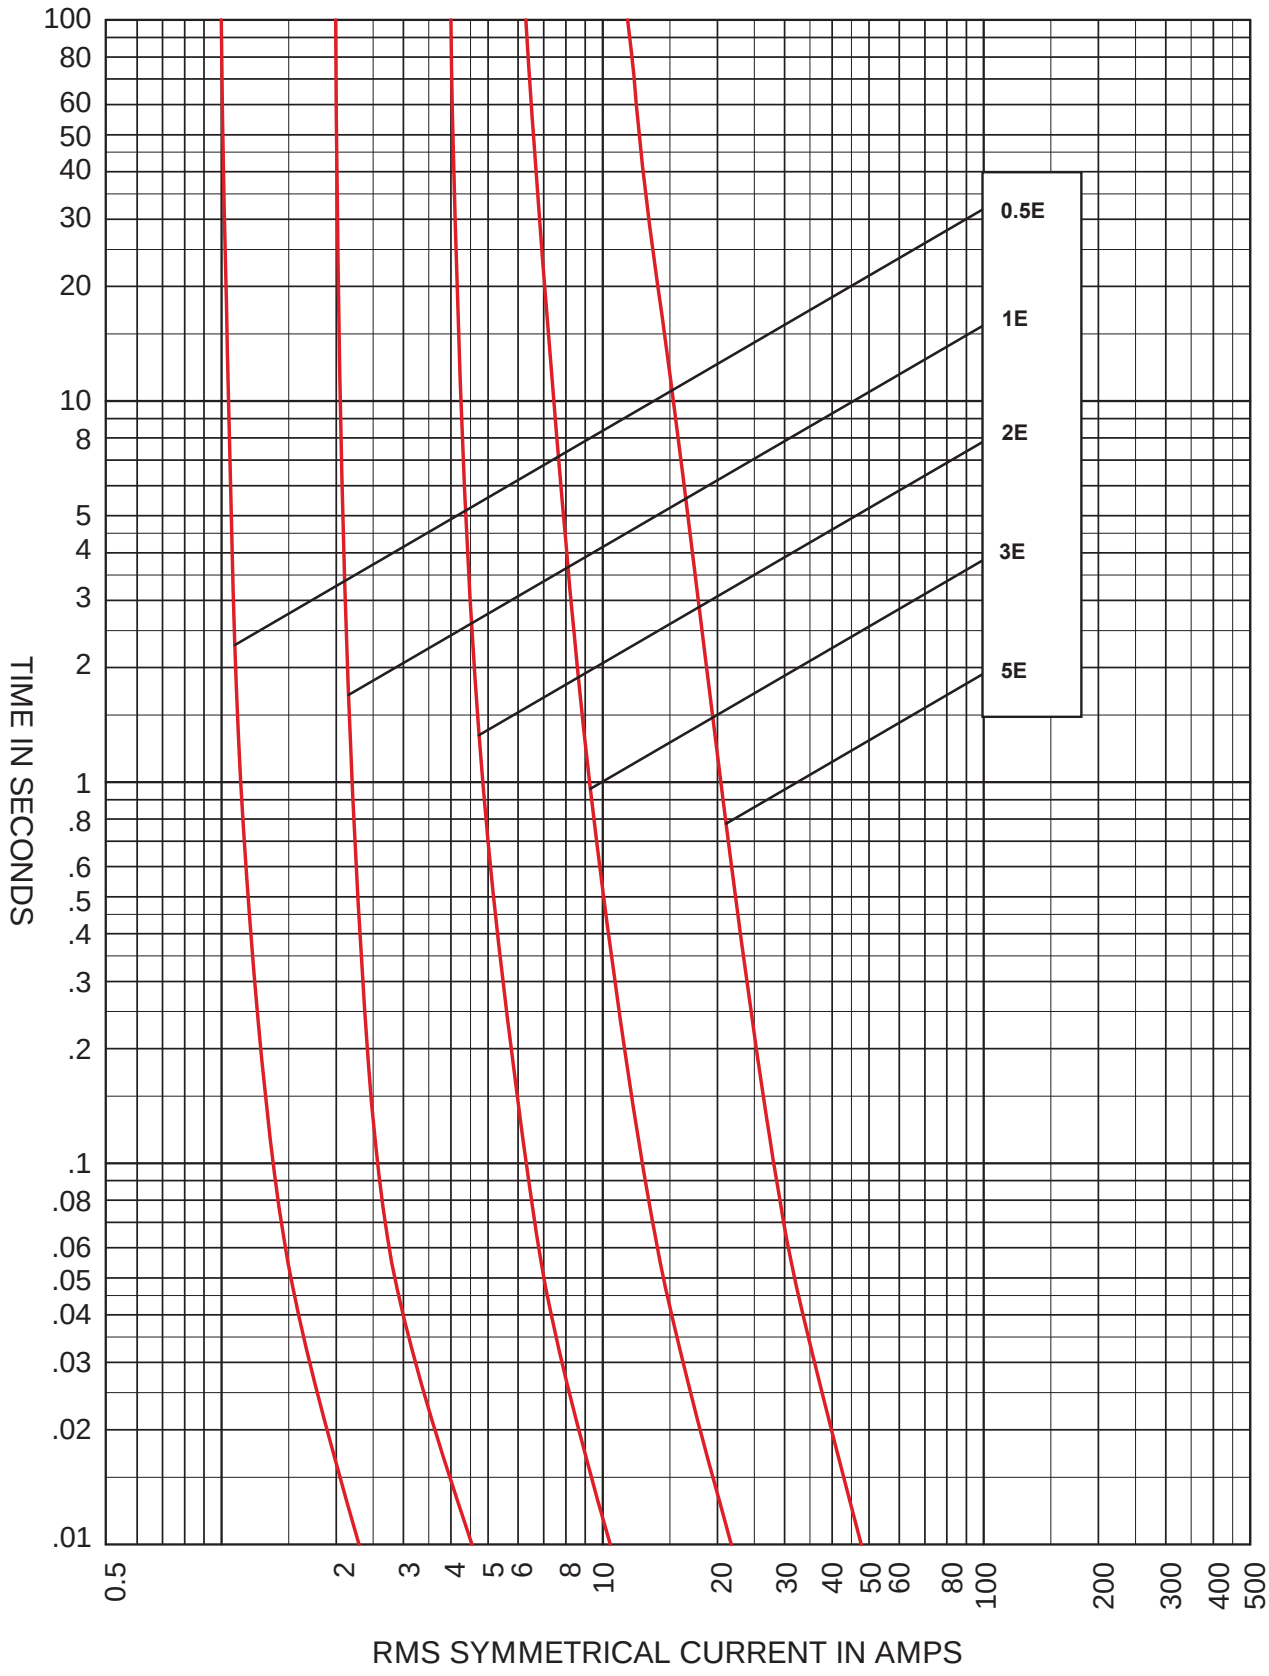

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Time current characteristics for E rated 5.5kV VT Fuse Links, fuse type AMWNA (maximum melting times)

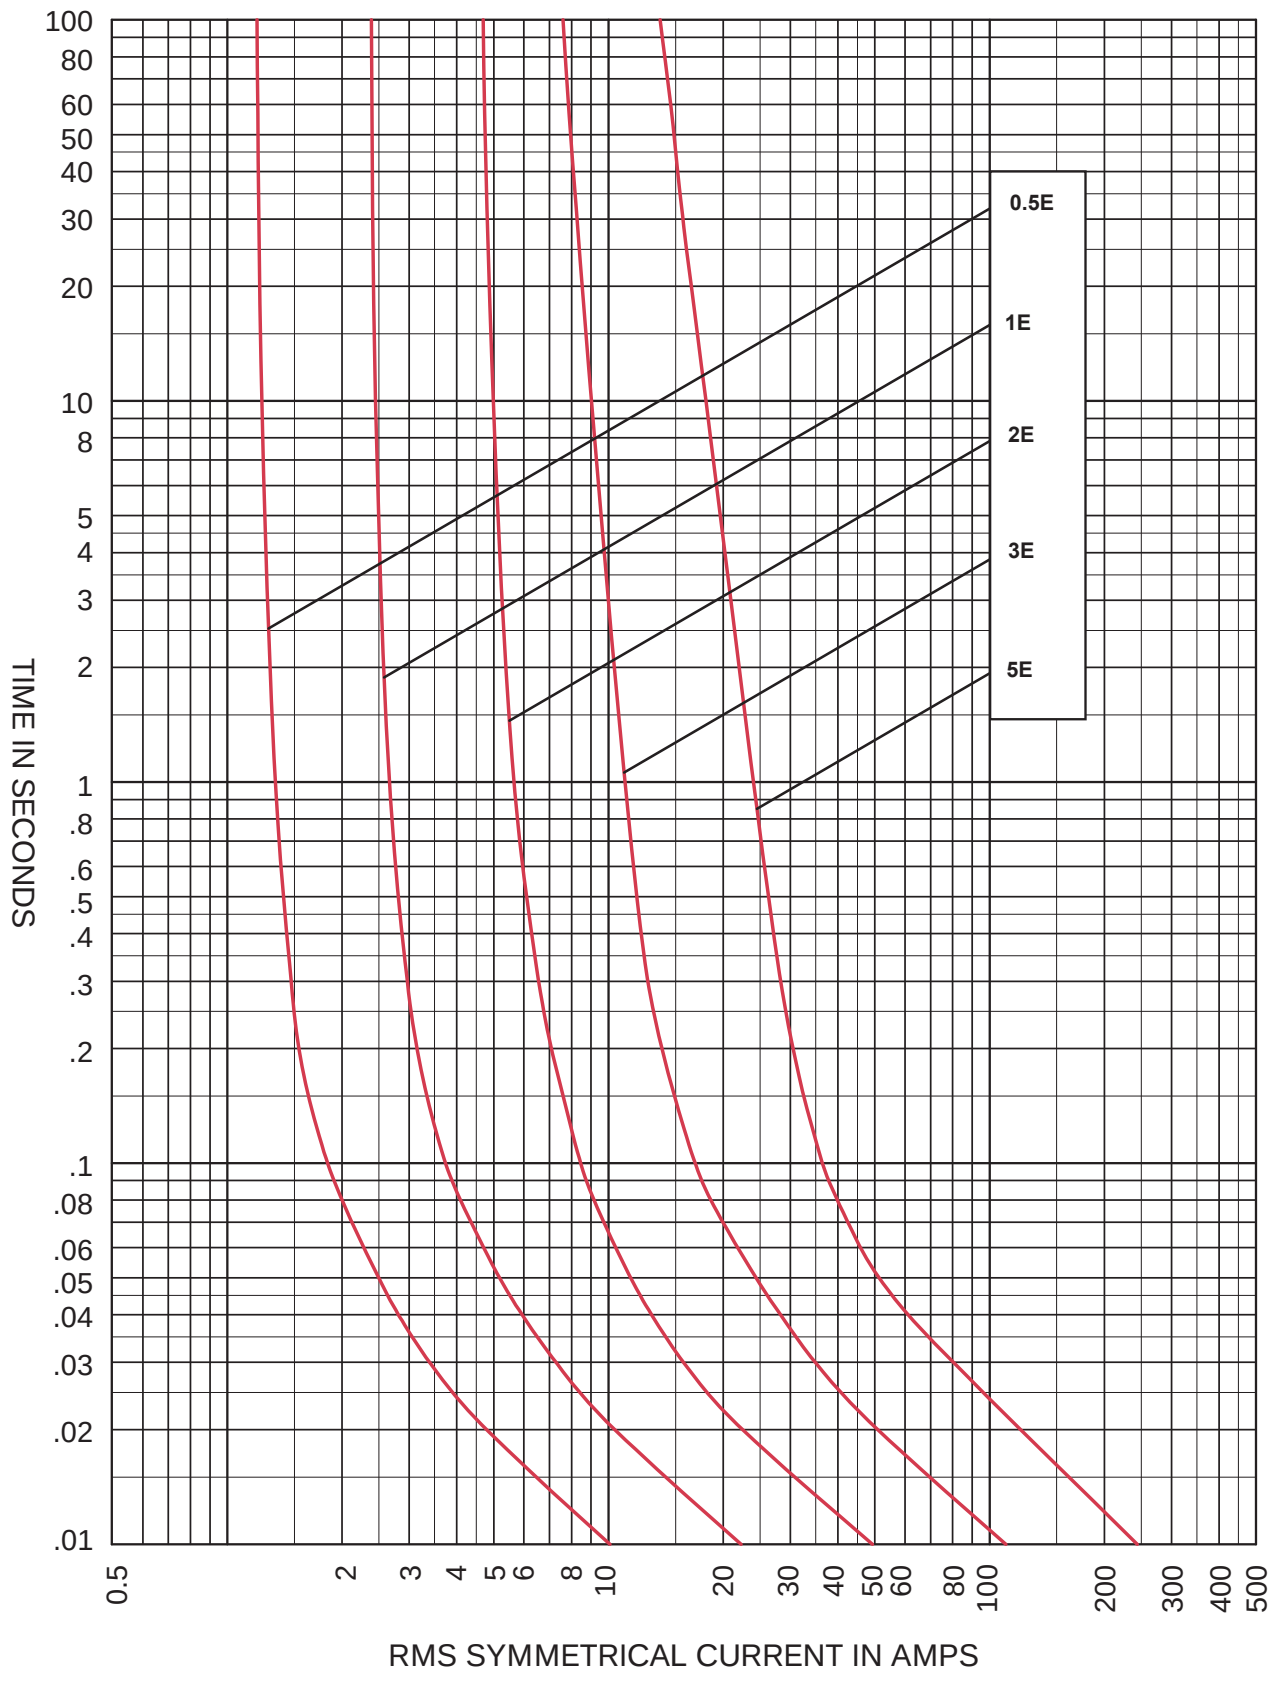

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Selection Table


Table of ratings for voltage transformer fuses, 3.6 - 38kV type CAV

Part Number	Voltage Rating	Current Rating	Breaking Capacity	Cold resistance in free air at rated current	Joule Intergral (I^2t)		Length	Diameter Ø	Weight
	U_n	I_n	I_1		A^2s				
	kV	A	kA	Ω	Minimum Pre-Arcing	Maximum Total Clearing	mm	mm	kg
3.6CAV2	3.6	2	50	0.492	$6.2X10^0$	$1.8X10^1$	220	41.3	0.7
5.5 CAV15E	5.5	15	50	0.488	$5.5X10^2$	$3.5X10^3$	187	41.3	0.6
5.5CAVH0.5E	5.5	0.5	50	12.1	$1.4X10^1$	$9.0X10^1$	187	41.3	0.6
5.5CAVH1E	5.5	1	50	12.1	$1.4X10^1$	$9.0X10^1$	187	41.3	0.6
5.5CAVH2E	5.5	2	50	0.388	$1.8X10^1$	$1.1X10^2$	187	41.3	0.6
7.2CAV2	7.2	2	40	0.893	$6.2X10^0$	$1.8X10^1$	220	41.3	0.7
7.2CAV4	7.2	4	40	0.503	$2.0X10^1$	$5.7X10^1$	220	41.3	0.7
7.2CAV6	7.2	6	40	0.321	$4.8X10^1$	$1.4X10^2$	220	41.3	0.7
7.2CAV10	7.2	10	40	0.215	$1.1X10^2$	$3.2X10^2$	220	41.3	0.7
12CAV2	12	2	40	1.34	$6.2X10^0$	$1.8X10^1$	220	41.3	0.7
15.5CAV0.5E	15.5	0.5	80	151	$0.5X10^0$	$1.5X10^0$	327	41.3	0.9
15.5CAV1E	15.5	1	80	75.4	$2.0X10^0$	$5.8X10^0$	327	41.3	0.9
15.5CAV2E	15.5	2	80	32.3	$1.2X10^0$	$3.5X10^0$	327	41.3	0.9
15.5CAV3E	15.5	3	80	16.2	$4.8X10^0$	$1.4X10^1$	327	41.3	0.9
15.5CAV5E	15.5	5	80	0.659	$2.0X10^1$	$1.3X10^2$	327	41.3	0.9
15.5CAV7E	15.5	7	80	0.375	$7.1X10^1$	$4.5X10^2$	327	41.3	0.9
15.5CAVH0.5E	15.5	0.5	80	30.1	$1.4X10^1$	$9.0X10^1$	327	41.3	0.9
15.5CAVH1E	15.5	1	80	30.1	$1.4X10^1$	$9.0X10^1$	327	41.3	0.9
15.5CAVH2E	15.5	2	80	0.947	$1.8X10^1$	$1.1X10^2$	327	41.3	0.9
17.5CAV2	17.5	2	40	1.69	$6.3X10^0$	$1.8X10^1$	220	41.3	0.7
17.5CAV4	17.5	4	40	0.611	$4.8X10^1$	$1.4X10^2$	220	41.3	0.7
17.5CAV6	17.5	6	40	0.362	$1.4X10^2$	$4.0X10^2$	220	41.3	0.7
17.5CAV10	17.5	10	40	0.239	$3.2X10^2$	$9.2X10^2$	220	41.3	0.7
24CAV2	24	2	40	2.54	$6.2X10^0$	$1.8X10^1$	340	41.3	1.0
24CAV3	24	3	40	1.43	$2.0X10^1$	$5.7X10^1$	340	41.3	1.0
24CAV4	24	4	40	0.916	$4.8X10^1$	$1.4X10^2$	340	41.3	1.0
36CAV2	36	2	40	3.12	$6.2X10^0$	$1.8X10^1$	440	41.3	1.2
36CAV4	36	4	40	1.12	$4.8X10^1$	$1.4X10^2$	440	41.3	1.2
38CAV4E	38	4	40	2.42	$1.2X10^1$	$3.4X10^1$	440	41.3	1.2
38CAVH0.5E	38	0.5	40	66.6	$1.4X10^1$	$9.0X10^1$	440	41.3	1.2
38CAVH1E	38	1	40	66.6	$1.4X10^1$	$9.0X10^1$	440	41.3	1.2
38CAVH2E	38	2	40	2.20	$1.8X10^1$	$1.1X10^2$	440	41.3	1.2

- These Voltage Transformer fuse links are available in the ratings shown in the table above. CAV fuse links are suitable for indoor use in air only. Type CAVH Fuse links are fitted with striker pins which may be used for indication purposes.

Fuse Link type: CAV (Shown with striker fitted)

FUSE LINK TYPE	A
3.6CAV	220
5.5CAV 5.5CAVH	187
7.2CAV	220
12CAV	220
15.5CAV 15.5CAVH	327
17.5CAV	220
24CAV	340
36CAV	440
38CAV 38CAVH	440

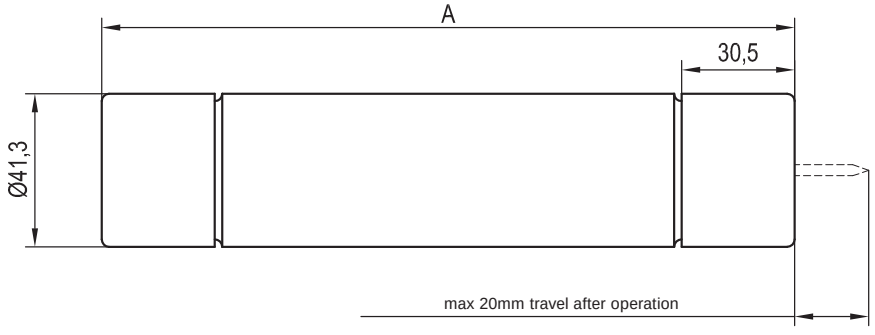

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP