



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

Chassis Mountable Power Supplies



Features

- Unique “Clamp” Type Barrier Strip
- Four Molded-In Threaded Inserts
- Four Through Holes for Easy Mounting
- Covered Under Caalex 5 Year Warranty

Description

The unique Caalex “CM” design creates the most flexible and well-engineered power supply package on the market today. These chassis mountable supplies are ideal for use with dedicated microprocessor systems, instrument design and test equipment. The CM units can also be used as supplemental bench or laboratory power supplies.

The special “clamp” type barrier strip secures the wire without twisting. Note the protected, recessed, barrier strip facing the top of the case. This allows all connections to be made in tight quarters while protecting the barrier strip from physical damage.

Nothing else offers this combination of ruggedness, flexibility and convenience. All Caalex chassis mount power supplies are guaranteed to provide at least 5 years of reliable service.

Model CM1.5.1000 has output voltage protection which operates between 5.8 and 6.85 Volts. Power must be removed to reset the overvoltage clamp.

Common Specifications

Input Voltages

- 100 \pm 10 VAC (add “-100” to model number)
- 115 \pm 10 VAC (add “-115” to model number)
- 220 \pm 20 VAC (add “-220” to model number)
- 230 \pm 20 VAC (add “-230” to model number)
- 240 \pm 20 VAC (add “-240” to model number)

Selection Chart

Output Voltage VDC	Output Current mA	Voltage Accuracy	Line & Load Regulation Maximum	Noise & Ripple mv RMS	Case Size	Unit Weight (oz.)	Model Number
Single Output							
5	1000	\pm 1.0%	\pm 0.10%	1	CM	17.5	CM1.5.1000
10	400	\pm 1.0%	\pm 0.10%	1	CM	17.5	CM1.10.400
12	500	\pm 1.0%	\pm 0.10%	1	CM	17.5	CM1.12.500
15	400	\pm 1.0%	\pm 0.10%	1	CM	17.5	CM1.15.400
24	240	\pm 0.5%	\pm 0.04%	1	CM	17.5	CM1.24.240
250	30	\pm 3.0%	\pm 2.0%	5	CM	17.5	CM1.250.30
Dual Output							
\pm 12	\pm 120	\pm 0.5%	\pm 0.04%	1	CM	17.5	CM2.12.120
\pm 12	\pm 240	\pm 0.5%	\pm 0.04%	1	CM	17.5	CM2.12.240
\pm 15	\pm 100	\pm 0.5%	\pm 0.04%	1	CM	17.5	CM2.15.100
\pm 15	\pm 200	\pm 0.5%	\pm 0.04%	1	CM	17.5	CM2.15.200
Triple Output							
\pm 12 & 5	\pm 100 600	\pm 1.0%	\pm 0.10%	2	CM	18.2	CM3.12.5
\pm 15 & 5	\pm 100 500	\pm 1.0%	\pm 0.10%	2	CM	18.2	CM3.15.5




Chassis Mountable Power Supplies

Specifications


All Parameters measured at 25°C, nominal input voltage and full rated load unless otherwise noted.

All Models			Unit
Input Frequency Range	TYP	50 to 60	Hz
Short Circuit Protection	TYP	Current Limiting (Will withstand momentary short to common)	
Isolation			
Isolation Resistance	MIN	50	megohm
Isolation Voltage *	MIN	1200 - 1500	VRMS
Input to Output Capacitance *	TYP	50 - 250	pF
Environmental			
Case Operating Range No Derating	MIN	-25	°C
	MAX	+50	
Storage Range	MIN	-25	°C
	MAX	+85	
Temperature Coefficient	TYP	±0.01	%/°C
Case	CM		

* Contact CALEX for information on exact model, call (800) 542-3355 or (925) 687-4411. Specifications subject to change without notice.

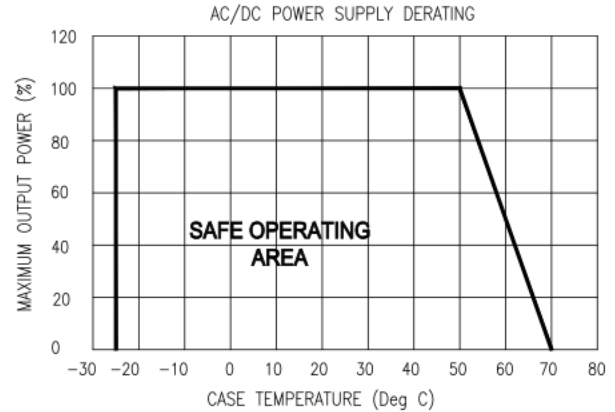

CM Case

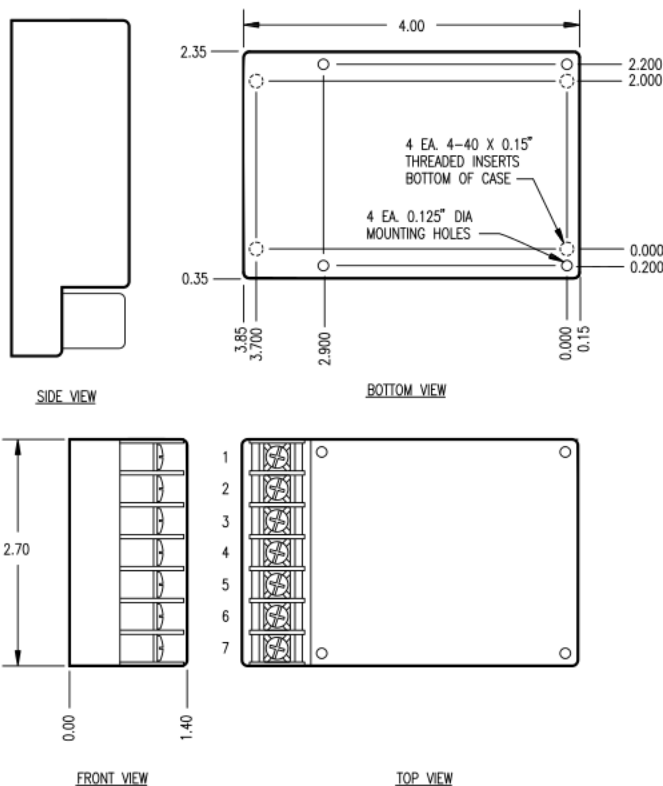

Screw Terminal	Terminal Strip Assignments		
	Function		
	Single	Dual	Triple
1	-	-	AC IN
2	AC IN	AC IN	AC IN
3	AC IN	AC IN	5V CMN
4	-	-OUT	+5V CMN
5	CMN	CMN	-OUT
6	+OUT	+OUT	CMN
7	-	-	+OUT

NOTE: CM Triple units' commons are isolated.

Mechanical tolerances unless otherwise noted:

X.XX dimensions: ±0.020 inches

X.XXX dimensions: ±0.005 inches





Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com