ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Carlo Gavazzi SPD241201* at our website: ***Click HERE***

Switching Power Supply
Type SPD 30W
DIN rail mounting



- **Universal AC input full range**
- **Installation on DIN rail 7.5 or 15mm**
- **Short circuit protection**
- **Overload protection**
- **Class 2 output**
- **High efficiency**
- **LED indicator for DC power ON**
- **CE, TUV approved and cULus Listed**

Product Description

The Switching power supplies SPD series are specially designed to be used in all automation application where the installation is on a DIN rail and compact dimensions and performance are a must.

Ordering Key

SP D 12 30 1 B

- **Model**
- **Mounting (D = Din rail)**
- **Output voltage**
- **Output power**
- **Input Type**
- **Optional features**

Input type: 1= single phase

Approvals

Optional Features

Description	code
Spring connectors	B

Output performances

Model	Output Voltage (VDC)	Output Current (A)	Voltage Trim Range Min. (VDC)	Voltage Trim Range Max. (VDC)	DC on LED (VDC Min.)	Typical Efficiency
SPD05	**5**	**6.0**	**5**	**5.5**	**4**	**79%**
SPD12	**12**	**2.5**	**12**	**14**	**9.6**	**84%**
SPD24	**24**	**1.25**	**24**	**28**	**19.2**	**86%**
SPD48	**48**	**0.625**	**48**	**55**	**37**	**86%**

Output data

Line regulation	± 0.5% max	**Ouput Voltage accuracy**	± 2%
Load regulation	± 0.5% max	**Temperature coefficient**	± 0.02%/°C
Minimum load	0	**Hold up Time Vi = 115Vac**	20ms min
Turn on time (full resistive load)	1.0s max	**Hold up time Vi = 230Vac**	30ms min
Transient recovery time	300 ms	**Voltage fall time (I_0nom)**	150ms max
Ripple and noise (bw=20Mhz)	50mVpp	**Voltage rise time at full resistive load**	150ms max

Input data

Rated input voltage	100 - 240	**Frequency range**	**47- 63 Hz**
Voltage range		**Inrush current**	
AC	85 - 264 Vac	Vi= 115Vac	20A
DC	90 - 375 Vdc	Vi= 230Vac	40A

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Controls and Protections

Overload	110 – 140%
Input Fuse	T2A/250Vac internal*
Output Short Circuit	Fold forward
Power ready output (only SPD 24)	
On threshold	≥20V ± 1V
Off threshold	≤19.2V ± 1V

Over voltage protection

	VDC Min.	VDC Max.
SPD5	6	6.8
SPD12	15	16.5
SPD24	30	33
SPD48	60	66

General data (@ nominal line, full load, 25°C)


Ambient temperature	-10°C to 71°C	**Cooling**	Free air convection
Derating (>60°C to +71°C)	2.5%/°C	**Switching frequency**	50kHz
Ambient humidity	20 ~ 90%RH	**MTBF**	565.000h
Storage	-25°C to +85°C	**Case material**	Plastic: PC, UL94-V0
Protection degree	IP20	**Dimensions L x W x D**	90 x 40.5 x 115
		Weight	290g

Norms and Standards

Insulation voltage I / O	3.000Vac	**CE**	EN61000-6-3 - EN55022 Class B EN61000-3-2 - EN61000-3-3 EN61000-6-2 - EN550241 EN61000-4-2 - EN61000-4-3 EN61000-4-4 - EN61000-4-5 EN61000-4-6 - EN61000-4-8 EN61000-4-11
Insulation resistance	100Mohm		
UL / cUL	UL508 listed, UL60950-1, UL1310 Class 2 (5V without class 2) Recognised		
TUV	EN60950-1		

* fuse not replaceable by user

Block diagrams

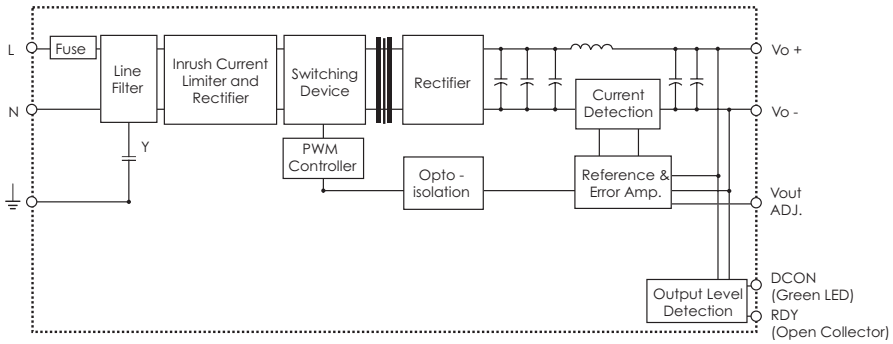


Pin assignement and front controls

Pin No.	Designation	Description
1	RDY	DC OK output for relay (only on SPD24)
3	+	Positive output terminal
4	+	Positive output terminal
5	-	Negative output terminal
6	-	Negative output terminal
7	GND	Ground terminal to minimise High frequency emissions
8	L	Phase input (no polarity with DC input)
9	N	Neutral input (no polarity with DC input)
	Vout ADJ.	Trimmer for fine output voltage adjustment
	DC ON	DC output ready LED


Specifications are subject to change without notice

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Output Rdy Wiring diagram

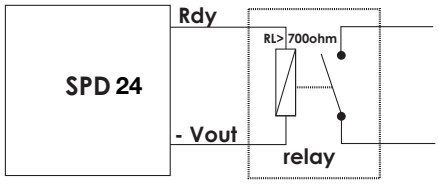


Relay connection diagram

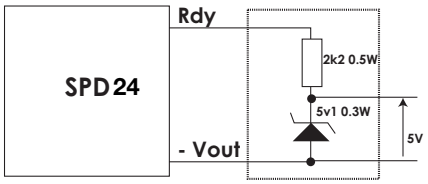


5V signal

Derating Diagram

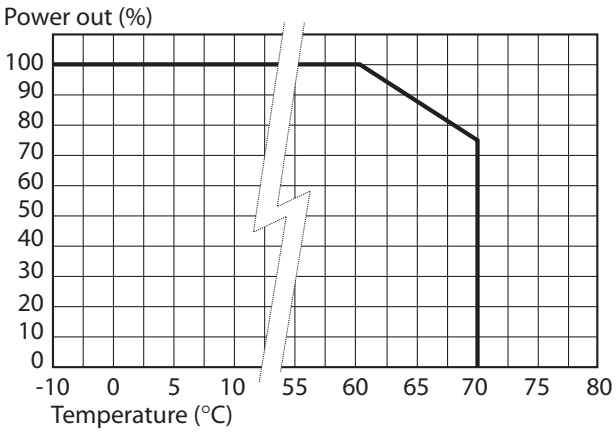

Mechanical Drawings

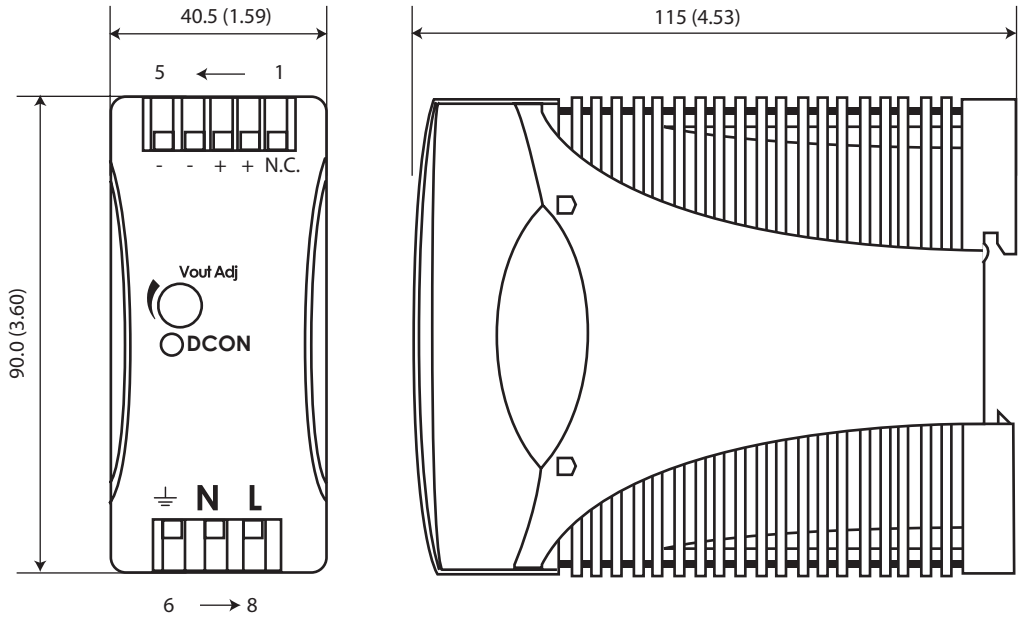


Installation

Ventilation and cooling	Normal convection All sides 25mm free space for cooling is recommended
Connector size range	Solid: 0.2 – 2mm^2 (AWG24-14) (use copper conductors only)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

SPD Switching Power Supplies

CARLO GAVAZZI presents a new range of power supplies especially designed for the automation market. The wide range of supply voltages and DC output voltages/power provide a multitude of choices for all low power electrical or electronic devices commonly used in automatic machinery. Components such as sensors, electromechanical relays, contactors, solid state relays, timers, temperature controllers, PLCs, process controllers, DC motors, solenoids, displays, etc. now have a reliable power source.

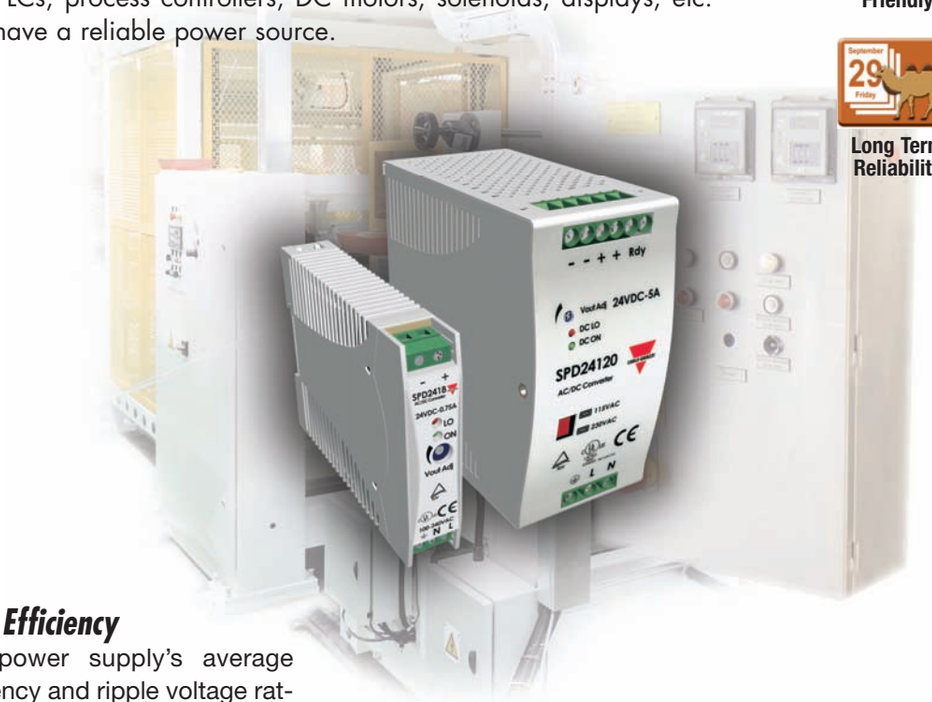

Space Optimization

Diagnostic Warning

User Friendly

Minimizing Energy Cost

Long Term Reliability

Long Term Reliability

High Efficiency

The power supply's average efficiency and ripple voltage ratings are comparable or better than most power supplies on the market.

Product Range

	5V	12V	15V	24V	48V
SPD 5-10-18W	■	■	■	■	
SPD 30-60W	■	■		■	■
SPD 120W		■		■	■
SPD 240-480W				■	■

Adjustable Output

All models provide a front potentiometer in order to adjust the output voltage. This useful feature can provide a voltage surplus when line voltage losses cause low voltages to the load.

Parallel Connection

Parallel connection is a standard feature with the 240W and 480W versions, and optional on the 120W version.

Visual and Electrical Indications

Models up to 18W are equipped with two front LEDs, which provide a visual indication of the 'Power Out' enabled and 'Low Voltage' on the output. All other sizes are equipped with an LED indication and also with an output 'Power Ready' signal. This signal could be used by other electronic devices or to power an alarm (this feature is only available on 24VDC output versions).

Power Factor Correction (PFC)

The PFC function is a standard feature on the 240W and 480W models and available upon request on the 120W model.


Approvals and Warranty

All SPD Power Supplies are approved according to UL, cUL, TUV and CE safety standards: UL class 2 recognized and Class B for the emissions according to European standards. They are also RoHS compliant. All models feature a Two Year Warranty.

Specifications are subject to change without notice.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Switching Power Supplies

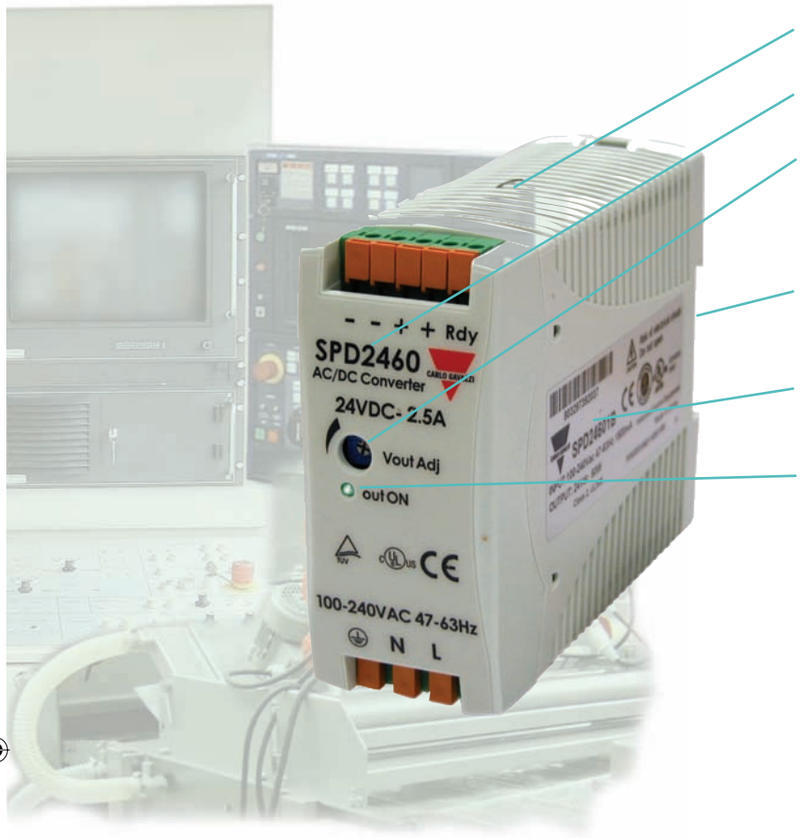

Ventilation Grid

Model Number


Output Voltage Adjustment
Allows adjustment of output voltage within a small range to the required value.

DIN Rail Clip
Easy installation an any kind of DIN Rail.

Safety Label
Approval data file numbers EAN cod and traceability data.

'ON' LED
Indicates power output is OK.

OPTIONAL SPRING LOADED TERMINALS
On all models up to 60W a choice between spring loaded terminals and screw terminals is provided. Spring loaded terminals allow fast and reliable machine connection, saving time and money.
On 30W and 60W '+' and '-' terminals are doubled in order to increase current capacity of connection wires using two smaller section cables.

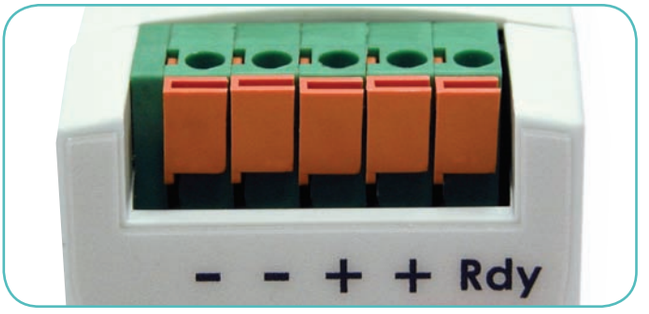



SPD 30 and 60W

- 30 and 60W Switching Power Supplies
- 40.5mm wide, plastic enclosure
- DIN rail mounting
- Screw terminal or spring terminal connections
- Input voltage: 85-264VAC or 90-375VDC
- Available output voltages: 5, 12, 24 and 48VDC
- Output voltage adjustment
- Internal noise filter
- Short circuit protection
- Front indication of power 'ON'
- Output with electrical signal of power 'Ready'
- Operating temperature without derating: –10° to +60°C

Specifications are subject to change without notice.

SPDbroG.indd 6 3/12/07 9:24:55 PM
Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Switching Power Supplies

CARLO GAVAZZI

Part Number	Description	Vin *VAC	Vout VDC	Iout A
SPD 05 05 1	Switching Power Supply 5W, DIN Rail	100 - 240	5	1
SPD 05 05 1B	Switching Power Supply 5W, DIN Rail Spring terminals	100 - 240	5	1
SPD 12 05 1	Switching Power Supply 5W, DIN Rail	100 - 240	12	0.42
SPD 12 05 1 B	Switching Power Supply 5W, DIN Rail, Spring terminals	100 - 240	12	0.42
SPD 15 05 1	Switching Power Supply 5W, DIN Rail	100 - 240	15	0.34
SPD 15 05 1 B	Switching Power Supply 5W, DIN Rail, Spring terminals	100 - 240	15	0.34
SPD 24 05 1	Switching Power Supply 5W, DIN Rail	100 - 240	24	0.21
SPD 24 05 1 B	Switching Power Supply 5W, DIN Rail, Spring terminals	100 - 240	24	0.21
SPD 05 10 1	Switching Power Supply 10W, DIN Rail	100 - 240	5	2
SPD 05 10 1 B	Switching Power Supply 10W, DIN Rail, Spring terminals	100 - 240	5	2
SPD 12 10 1	Switching Power Supply 10W, DIN Rail	100 - 240	12	0.84
SPD 12 10 1 B	Switching Power Supply 10W, DIN Rail, Spring terminals	100 - 240	12	0.84
SPD 15 10 1	Switching Power Supply 10W, DIN Rail	100 - 240	15	0.67
SPD 15 10 1 B	Switching Power Supply 10W, DIN Rail, Spring terminals	100 - 240	15	0.67
SPD 24 10 1	Switching Power Supply 10W, DIN Rail	100 - 240	24	0.42
SPD 24 10 1 B	Switching Power Supply 10W, DIN Rail, Spring terminals	100 - 240	24	0.42
SPD 05 18 1	Switching Power Supply 15W, DIN Rail	100 - 240	5	3
SPD 05 18 1 B	Switching Power Supply 15W, DIN Rail, Spring terminals	100 - 240	5	3
SPD 12 18 1	Switching Power Supply 18W, DIN Rail	100 - 240	12	1.5
SPD 12 18 1 B	Switching Power Supply 18W, DIN Rail, Spring terminals	100 - 240	12	1.5
SPD 15 18 1	Switching Power Supply 18W, DIN Rail	100 - 240	15	1.2
SPD 15 18 1 B	Switching Power Supply 18W, DIN Rail, Spring terminals	100 - 240	15	1.2
SPD 24 18 1	Switching Power Supply 18W, DIN Rail	100 - 240	24	0.75
SPD 24 18 1 B	Switching Power Supply 18W, DIN Rail, Spring terminals	100 - 240	24	0.75
SPD 05 30 1	Switching Power Supply 30W, DIN Rail	100 - 240	5	6
SPD 05 30 1 B	Switching Power Supply 30W, DIN Rail, Spring terminals	100 - 240	5	6
SPD 12 30 1	Switching Power Supply 30W, DIN Rail	100 - 240	12	2.5
SPD 12 30 1 B	Switching Power Supply 30W, DIN Rail, Spring terminals	100 - 240	12	2.5
SPD 24 30 1	Switching Power Supply 30W, DIN Rail,	100 - 240	24	1.25
SPD 24 30 1 B	Switching Power Supply 30W, DIN Rail, Spring terminals	100 - 240	24	1.25
SPD 48 30 1	Switching Power Supply 30W, DIN Rail,	100 - 240	48	0.625
SPD 48 30 1 B	Switching Power Supply 30W, DIN Rail, Spring terminals	100 - 240	48	0.625
SPD 05 60 1	Switching Power Supply 50W, DIN Rail	100 - 240	5	10
SPD 05 60 1 B	Switching Power Supply 50W, DIN Rail, Spring terminals	100 - 240	5	10
SPD 12 60 1	Switching Power Supply 60W, DIN Rail	100 - 240	12	5
SPD 12 60 1 B	Switching Power Supply 60W, DIN Rail, Spring terminals	100 - 240	12	5
SPD 24 60 1	Switching Power Supply 60W, DIN Rail	100 - 240	24	2.5
SPD 24 60 1 B	Switching Power Supply 60W, DIN Rail, Spring terminals	100 - 240	24	2.5
SPD 48 60 1	Switching Power Supply 60W, DIN Rail	100 - 240	48	1.25
SPD 48 60 1 B	Switching Power Supply 60W, DIN Rail, Spring terminals	100 - 240	48	1.25
SPD 12 120 1	Switching Power Supply 120W, DIN Rail	100 - 240	12	10
SP D 12 120 1 F	Switching Power Supply 120W, DIN Rail,	100 - 240 with PFC	12	10
SP D 12 120 1 P	Switching Power Supply 120W, DIN Rail, with Parallel function	100 - 240	12	10
SP D 12 120 1 FP	Switching Power Supply 120W, DIN Rail, with PFC and Parallel function	100 - 240	12	10

Part Number	Description	Vin *VAC	Vout VDC	Iout A
SP D 12 120 1 B	Switching Power Supply 120W, DIN Rail, Removable connectors	100 - 240	12	10
SPD 12 120 1 BF	Switching Power Supply 120W, DIN Rail, Removable connectors and PFC	100 - 240	12	10
SPD 12 120 1 BP	Switching Power Supply 120W, DIN Rail, Removable connectors and Parallel function	100 - 240	12	10
SPD 12 120 1 BFP	Switching Power Supply 120W, DIN Rail, Removable connectors, PFC and Parallel function	100 - 240	12	10
SPD 24 120 1	Switching Power Supply 120W, DIN Rail	100 - 240	24	5
SPD 24 120 1 F	Switching Power Supply 120W, DIN Rail,	100 - 240 with PFC	24	5
SPD 24 120 1 P	Switching Power Supply 120W, DIN Rail, with Parallel function	100 - 240	24	5
SPD 24 120 1 FP	Switching Power Supply 120W, DIN Rail, with PFC and Parallel function	100 - 240	24	5
SPD 24 120 1 B	Switching Power Supply 120W, DIN Rail, Removable connectors	100 - 240	24	5
SPD 24 120 1 BF	Switching Power Supply 120W, DIN Rail, Removable connectors and PFC	100 - 240	24	5
SPD 24 120 1 BP	Switching Power Supply 120W, DIN Rail, Removable connectors and Parallel function	100 - 240	24	5
SPD 24 120 1 BFP	Switching Power Supply 120W, DIN Rail, Removable connectors, PFC and Parallel function	100 - 240	24	5
SPD 48 120 1	Switching Power Supply 120W, DIN Rail	100 - 240	48	2.5
SPD 48 120 1 F	Switching Power Supply 120W, DIN Rail,	100 - 240 with PFC	48	2.5
SPD 48 120 1 P	Switching Power Supply 120W, DIN Rail, with Parallel function	100 - 240	48	2.5
SPD 48 120 1 FP	Switching Power Supply 120W, DIN Rail, with PFC and Parallel function	100 - 240	48	2.5
SPD 48 120 1 B	Switching Power Supply 120W, DIN Rail, Removable connectors	100 - 240	48	2.5
SPD 48 120 1 BF	Switching Power Supply 120W, DIN Rail, Removable connectors and PFC,	100 - 240	48	2.5
SPD 48 120 1 BP	Switching Power Supply 120W, DIN Rail, Removable connectors and Parallel function,	100 - 240	48	2.5
SPD 48 120 1 BFP	Switching Power Supply 120W, DIN Rail, Removable connectors, PFC and Parallel function	100 - 240	48	2.5
SPD 24 240 1	Switching Power Supply 240W, DIN Rail, PFC and Parallel function	100 - 240	24	10
SPD 24 240 1 B	Switching Power Supply 240W, DIN Rail, Removable connectors, PFC and Parallel function	100 - 240	24	10
SPD 48 240 1	Switching Power Supply 240W, DIN Rail, PFC and Parallel function	100 - 240	48	5
SPD 48 240 1 B	Switching Power Supply 240W, DIN Rail, Removable connectors, PFC and Parallel function	100 - 240	48	5
SPD 24 480 1	Switching Power Supply 480W, DIN Rail, PFC and Parallel function	100 - 240	24	20
SPD 24 480 1B	Switching Power Supply 480W, DIN Rail, Removable connector, PFC and Parallel function	100 - 240	24	20
SPD 48 480 1	Switching Power Supply 480W, DIN Rail, PFC and Parallel function	100 - 240	48	10
SPD 48 480 1B	Switching Power Supply 480W, DIN Rail, Removable connector, PFC and Parallel function	100 - 240	48	10

* Approximate AC supply voltage is 100-240VAC. However, they can also be powered by lower and higher AC voltages and also DC Voltages.
See datasheet for more accurate specifications.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP