ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Carlo Gavazzi SPD241201* at our website: ***Click HERE***

Switching Power Supply
Type SPD 60W
DIN rail mounting



- **Universal AC input full range**
- **Installation on DIN rail 7.5 or 15mm**
- **Short circuit protection**
- **Overload protection**
- **Class 2 output**
- **High efficiency**
- **LED indicator for DC power ON**
- **Power Ok output**
- **CE, TUV approved and cULus Listed**

Product Description

The Switching power supplies SPD series are specially designed to be used in all automation application where the installation is on a DIN rail and compact dimensions and performance are a must.

Ordering Key

SP D 24 60 1 B

- **Model**
- **Mounting (D = Din rail)**
- **Output voltage**
- **Output power**
- **Input Type**
- **Optional features**

Input type: 1= single phase

Approvals

Optional Features

Description	Code
Spring connectors	B

Output Performances

Model	Rated output Voltage (VDC)	Output Power (W)	Output Current (A)	Voltage Trim Range		DC ON green LED at start up DC LOW red LED after start up		Typical Efficiency
				Min. VDC	Max. VDC	Min. VDC	Max. VDC	
SPD05	5	50	10.0	5	5.5	3.5	4.5	79%
SPD12	12	60	5.0	12	14	9.0	10.8	86%
SPD24	24	60	2.5	24	28	18	21.6	89%
SPD48	48	60	1.25	48	55	37	43	89%

Output Data

Line regulation		± 0.5%
Load regulation		± 0.5%
Minimum load (A)		0
Turn on time (full resistive load)		1000ms max
Transient recovery time		2ms
Ripple and noise		50mVpp
Output voltage accuracy		± 1%
Temperature coefficient		± 0.03%/°C
Hold up time	**Vi= 115VAC**	20ms
	Vi= 230VAC	30ms
Voltage fall time (I_0nom)		150ms max

Rated continuous loading	
5V Model	10A @ 5VDC/9.0A @ 5.5VDC
12V Model	5A @ 12VDC/4.25A @ 14VDC
24V Model	2.5A @ 24VDC/2.1A @ 28VDC
48V Model	1.25A @ 48VDC/1.08A @ 55VDC
Reverse voltage	
5V Model	7.5VDC
12V Model	18VDC
24V Model	35VDC
48V Model	63VDC
Capacitor load	7000µF
Voltage rise time at full resistive load	150ms max

Specifications are subject to change without notice. Pictures are just an example. For special features and/or customization, please ask to our sales network. 18/04/12

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

CARLO GAVAZZI

Input Data

Rated input voltage		100 - 240VAC
Voltage range		
	AC	85 - 264VAC
	DC	90 - 375VDC
Rated input current		
(Vi : 115VAC, Io nom)	**Typ.**	1060mA
	Max.	1500mA
Inrush current		
	Vi= 115VAC	20A
	Vi= 230VAC	40A

Power dissipation		
(Vi : 230VAC, Io nom)	**5V Model**	12.5W
	12V Model	9.0W
	24V Model	8.8W
	48V Model	7.8W
Frequency range		47- 63Hz
Leakage current		
	Input-Output	0.25mA
	Input-FG	3.5mA

Controls and Protections

Overload		110 – 150%
Input fuse		T2A/250VAC internal[1)]
Output short circuit		Fold forward
Power ready output (Rdy)		
(only SPD 24)	**On threshold**	Vout > 19,2V ± 2%
	Off threshold	Vout < 19,1V ± 2%

[1)] Fuse not replaceable by user

		VDC	
Over voltage protection		**Min.**	**Max.**
	5V Model	6.0	6.8
	12V Model	15	16.5
	24V Model	30	33
	48V Model	60	66
Internal surge voltage protection (IEC 61000-4-5)		Varistor	

General Data (@ nominal line, full load, 25°C)

Ambient temperature		-40°C to 71°C
Derating (>61°C to +71°C)		2.5%/°C
Ambient humidity		20 ~ 95%RH
Storage		-40°C to +85°C
Protection degree		IP20
Cooling		Free air convection
Insulation voltage		
	Input-Output	3.000VAC/4242VDC min
	Input-FG	1.500VAC/2121VDC min
Insulation resistance I/O		100MΩ min (@ 500VDC)

MTBF (Bellcore issue 6 @ 40°C, GB)		
	5V Model	498000 Hours
	12V Model	504000 Hours
	24V Model	520000 Hours
	48V Model	531000 Hours
Case material		Plastic: PC, UL94-V0
Pollution degree		2
Altitude		2000m
Dimensions LxWxD mm(inch)		90(3.60)x40.5(1.59)x114(4.49)
Weight		340g


Norms and Standards

Vibration resistance	meet IEC 60068-2-6 (Mounting by rail: 10-500Hz, 2G, along X, Y, Z each Axis, 60 min for each Axis)
Shock resistance	meet IEC 60068-2-27 (15G, 11ms, 3 Axis, 6 faces, 3 times for each face)
UL / cUL	UL508 listed, UL60950-1, UL1310 Class 2 Power (only 5V, 12V w/o Class 2) Recognized, ISA 12.12.01 (Class 1, Division 2, Groups A, B, C and D)
TUV	EN 60950-1, CB scheme EN 61558-1, EN 61558-2-17 (meet EN 60204)
CCC	GB4943, GB9254, GB17625.1

CE	EN 61000-6-3, EN 55022 Class B, EN 61000-3-2, EN 61000-3-3, EN 61000-6-2, EN 55024, EN 61000-4-2 Level 4, EN 61000-4-3 Level 3, EN 61000-4-4 Level 4, EN 61000-4-5 L-Level 3, L/N-FG Level 4, EN 61000-4-6 Level 3, EN 61000-4-8 Level 4, EN 61000-4-11, ENV 50204 Level 2, EN 61204-3

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Block Diagrams

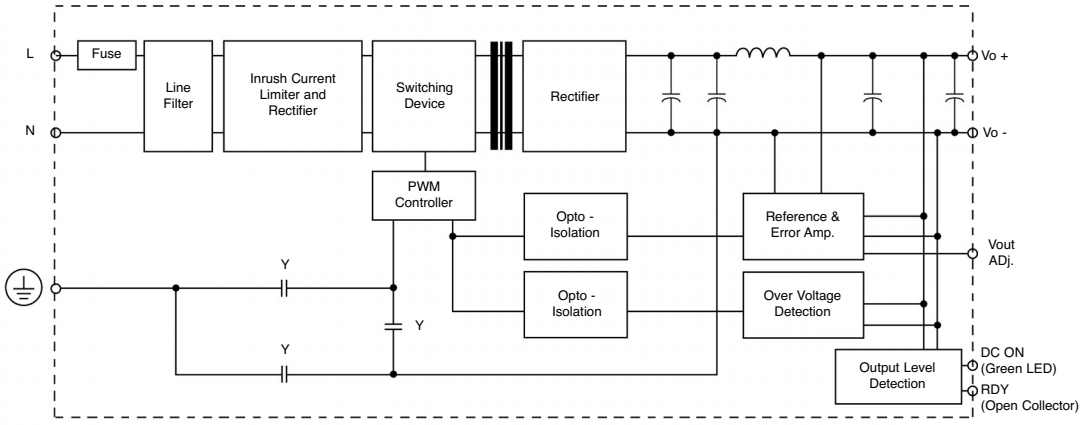


Pin Assignement and Front Controls

Pin No.	Designation	Description
1	**RDY**	DC OK, output for relay (only on SPD 24)
2	**+**	Positive output terminal
3	**+**	Positive output terminal
4	**-**	Negative output terminal
5	**-**	Negative output terminal
6	**GND**	Ground terminal to minimise High frequency emissions
7	**L**	Phase input (no polarity with DC input)
8	**N**	Neutral input (no polarity with DC input)
Pot1	**Vout ADJ.**	Trimmer for fine output voltage adjustment
L1	**DC ON**	DC output ready LED

Output Rdy Wiring Diagram

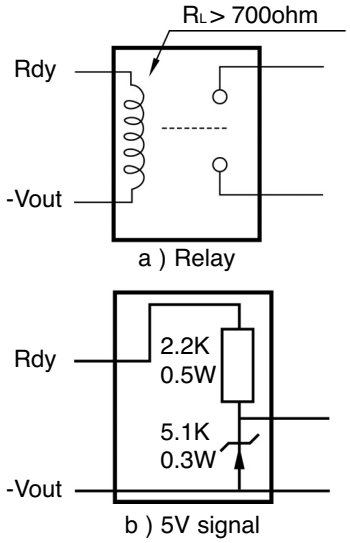


Derating Diagram

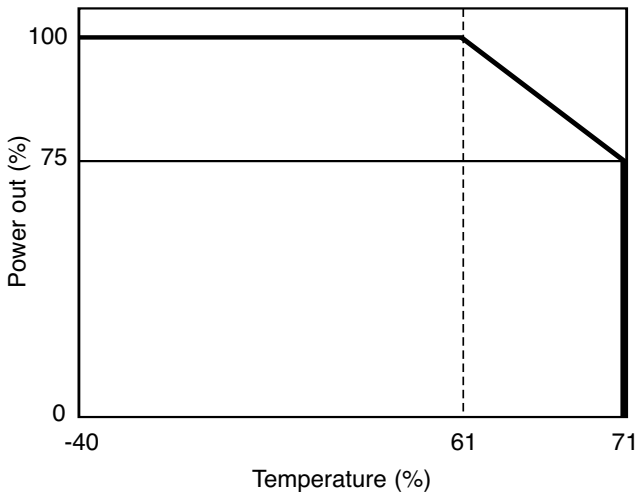


Specifications are subject to change without notice. Pictures are just an example. For special features and/or customization, please ask to our sales network. 18/04/12


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Typ. Current Limited Curve

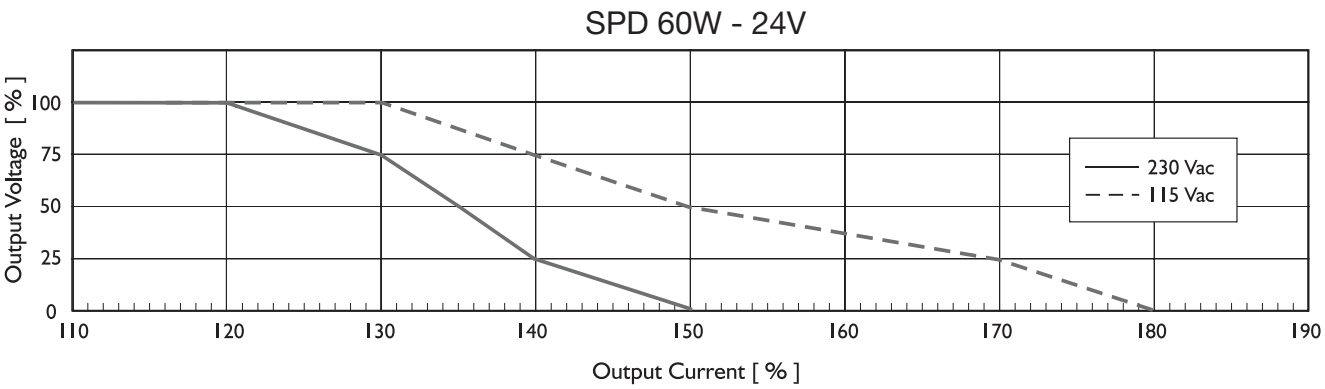


Mechanical Drawings mm (inches)

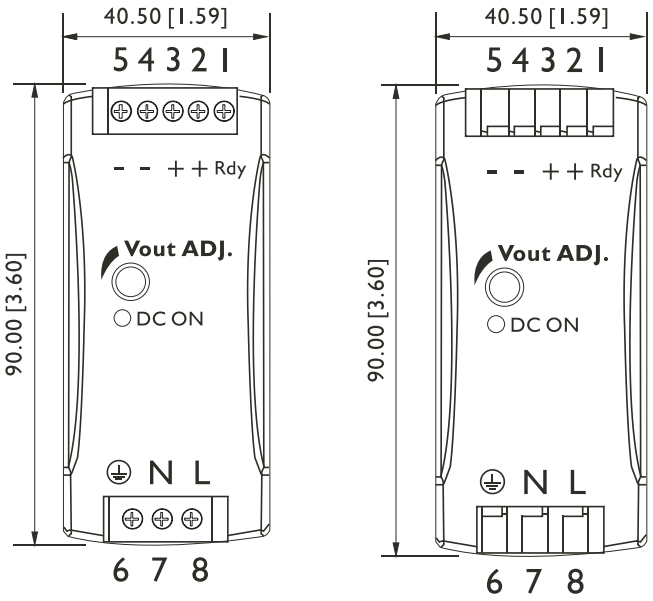

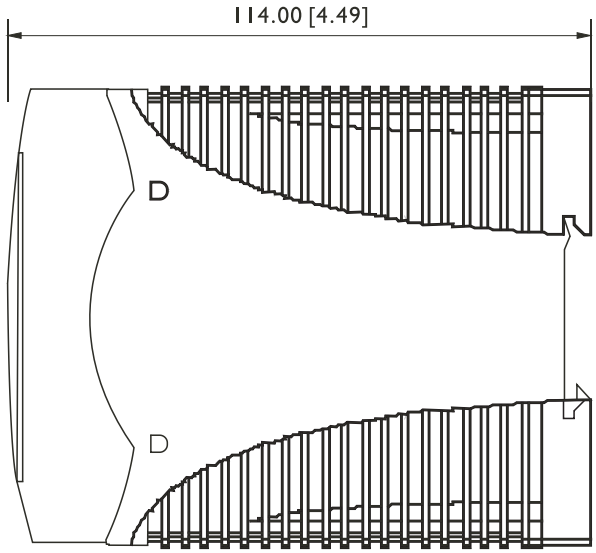

Typ. Efficiency Curve

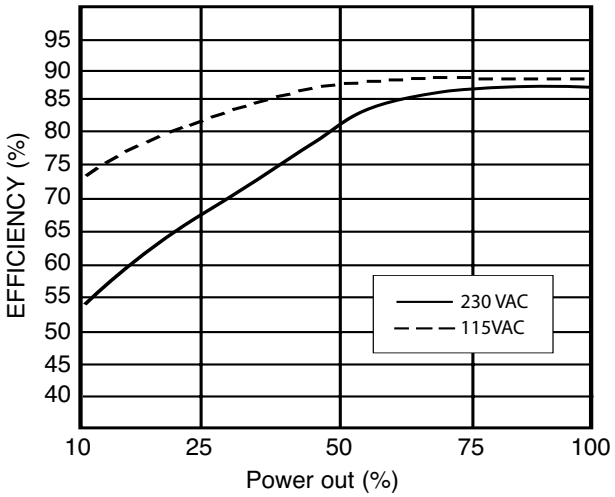

Installation

Ventilation and cooling	Normal convection All sides 25mm free space for cooling is recommended
Connector size range	
Spring terminal	AWG24-14 (0.2~2mm²) flexible/solid cable, 10mm stripping at cable and recommends use copper conductors only, 60/75°C
Screw terminal	AWG26-12 (0.2~2.5mm²) flexible/solid cable, connector can withstand torque at max 0,56Nm (5 lbs-in). 4~5 mm stripping at cable and recommends use copper conductors only, 60/75°C
Max. torque for terminal	
Input terminals	0.56Nm (5.0lb-in)
Output terminals	0.56Nm (5.0lb-in)
General tolerances mm(in.)	
0.00 (0.00) ÷ 30.00 (1.18)	±0.30 (0.01)
30.00 (1.18) ÷ 120.00 (4.72)	±0.50 (0.02)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP