ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Keysight / Agilent E2261A* at our website: *Click HERE*

C&H Technologies, Inc. • 445 Round Rock West Drive • Round Rock, TX 78681-5012

(512) 733-2621 • FAX (512) 733-2629 • www.chtech.com

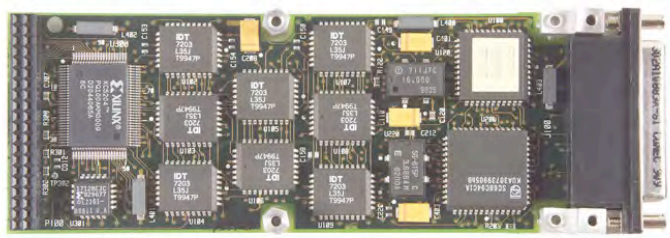

M217
Quad RS-232 Interface
M Module

The M232 (formerly Agilent E2261A) provides four (4) completely independent RS-232 terminal interfaces. Each channel has 13 programmable fixed data rates from 75 baud to 38.4 Kbaud and independently programmable handshake modes: RTS/CTS and/or DTR/DSR hardware handshakes, XON/XOFF software handshake, or none. Independent 2KByte input/output buffers for each port.

Specifications:

Serial Port Characteristics:

Baud Rates:	75, 110, 150, 300, 600, 1200, 1800, 2000, 2400, 4800 9600, 19200, 38400
Data Length:	5, 6, 7, 8 bits
Parity:	None, Odd, Even, Always 1, Always 0
Stop Bits:	1, 1.5 or 2

Handshake Pace:

Software:	Xon/Xoff
Hardware:	DTR/DSR at beginning to pace, RTS/CTS during transfer to pace

General Characteristics:

Distance:	50 feet
Isolation:	None

I/O Buffer Memory:

2 Kbytes for each channel

Connectors: 44 pin DSUB (Female)

Temperature:

Operating:	0°C to 55°C
Storage:	-40°C to 75°C

Power:

+5V @ 0.1 A
+12V @ 0.01 A
-12V @ 0.01 A

Notice: Due to component heights this module will work in our VXI, Ethernet and LXI carriers. Its use in PCI, cPCI, VME, PXI may require keeping a second card slot open next to the carrier.

M Module Compliance

Complies with ANSI/VITA Std 12-1996 for single-wide M Modules.

Data Transfers	16 bit
Interrupts	INTC

Compatible with VXI, VME, PCI, PXI, CPCI & Ethernet Carriers

Applications

- Terminal interfacing
- Peripheral Control

Ordering Information

Part Number 11029520-0001

Additional Information

User Manuals for C&H carriers and this module can be found on our website at www.chtech.com.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP