ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Astronics / C&H Technologies VX412C* at our website: ***Click HERE***

C&H Technologies, Inc. • 445 Round Rock West Drive • Round Rock, TX 78681-5012

(512) 733-2621 • FAX (512) 733-2629 • www.chtech.com

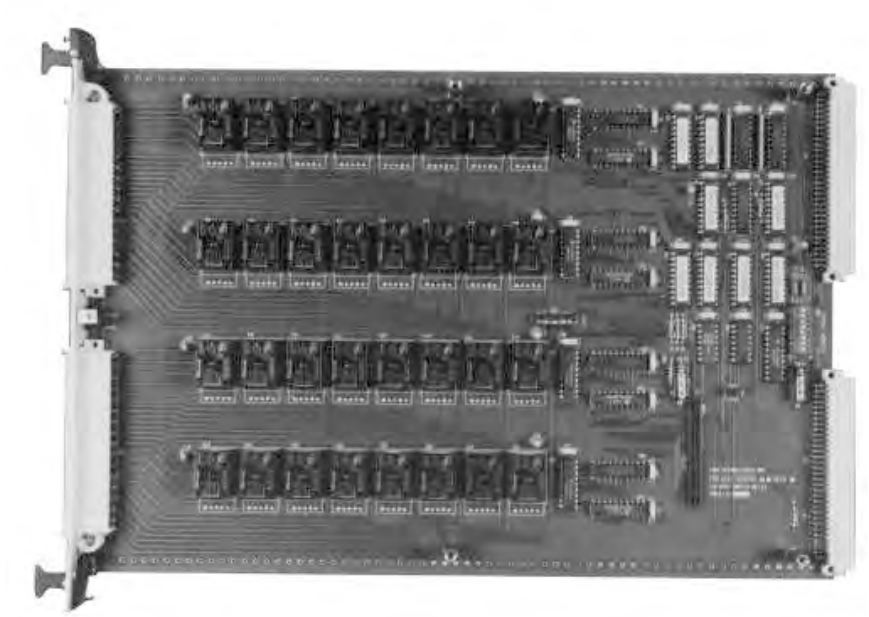

VX412C SPDT Switching Module

The VX412C is a C size, Register based switching card that provides 32 channels of 5A, Form-C switching. User connection to the module is through two (2) DIN 41612 Type F48M connectors. Normally closed, normally open and common terminals are provided for each of the non-latching relays. MODID and Board Select indicators are included. Module is equipped with BIT capability and shielding.

Specifications:

Maximum Input Voltage:
Terminal to Terminal:
250 Vdc or ac_{rms}
Terminal to Chassis:
250 Vdc or ac_{rms}

Maximum Switchable Voltage:
100 Vdc, 200 Vac_{rms}

Maximum Switchable Current:
(DC or AC_{rms}):

Per Contact:	5A
Per Module:	50A

Maximum Switchable Power:

Per Channel:	150W, 1250VA
Per Module:	1500W, 12500VA

Closed Channel Resistance:
Initially ≤ 0.1 Ω
(6Vdc @1A)

Insulation Resistance
(between any two points):
$>10^8\Omega$

Relay Life (operations):

No Load	1×10^7
250 Vac, 5A, Resistive	1×10^5

Relay Operative Time:

4 to 7 msec

Relay Release Time:

1 to 2 msec

Power Up/Down States:

Normally open contact is open.

Power: +5V @ 1.0A typical
+12V @ 1.5A typical

Ordering Information:

Description	Part Number
VX412C	11026205-0001
Locking Conn	See Accessories

VXIbus Compliance

Complies with ANSI/IEEE Std. 1014-1987 and VXIbus Rev 1.4

A16:D16 DTB Slave

Register based

No Interrupts

IACKIN tied to IACKOUT

BRX tied to BGX

Form Factor: Size C

Built-in test via register feedback

Applications

- Power Switching
- Control
- LF Signal Switching

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP