

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Chroma 52912* at our website: ***Click HERE***

PXI PROGRAMMABLE DC POWER SUPPLY

MODEL 52912/52914



Key Features :

- Dual Isolated outputs; 0-48VDC/ 0~2A/60W, programmable
- Direct Universal AC input via front panel (52914)
- External Trigger function
- Programmable current limit
- Over voltage, over current and short circuit protection
- Remote Voltage Sense
- 16 Bit read back voltage and current at output
- Supplies can be connected in series or parallel

Chroma 52912/52914 programmable power supplies are designed specifically for test applications that demand precision output voltage/current and tightly coupled measurement capabilities. Chroma 52912/52914 provides you a good return on investment. The versatile design and world-class performance of Chroma 52912/52914 make them ideal for a broad range of design and production applications in markets as diverse as communications, semiconductor, and components manufacturing.

Measurement function

In operation, the measurement capabilities include quickly setting I/V and then measuring I/V automatically without processor intervention. 52912/52914 has hardware built sequence list that can execute command and store data in FIFO without processor action. With the tight integration of a Chroma 52912/52914, you'll get high speeds for high throughput and high measurement accuracy and repeatability for yield integrity.

Power Levels

The 52912/52914 Programmable power supplies provide two independent and isolated 60W(MAX) supplies, and each channel is programmable from 0-48VDC to a maximum of 2.0 Amps. The 52912/52914 include programmable current limit to protect critical UUT's from excessive current, output will automatically switch into constant current mode when limit is reached. For greater power or voltage applications, channels can be connected in series or parallel.

Input Power

To avoid excess power draw from the PXI backplane, the 52912 draws input power (+56VDC) via front panel connections. This approach not only minimizes power required from the backplane but also maintains complete isolation between backplane logic and power conversion circuitry for noise immunity. For applications where +56VDC is not available, Chroma 52912 provides an optional ACDC adapter which allows the instrument to be operate from 90~260VAC mains. Chroma 52914 incorporates the AC-DC converter circuit on board. Universal power (60-260VAC) is applied to the front panel directly in order to produce the dual isolated programmable outputs.

Compliant to PXI and cPCI Standards

The 52912/52914 Programmable power supplies comply with the latest PXI Revision 2.2 specifications of the PXI System Alliance (PXISA) as well as the CompactPCI specifications as defined by the PCI Industrial Computer Manufacturing Group (PICMG). Thus, the 52912/52914 may be used in either PXI or CompactPCI mainframes.

Chroma

PXI PROGRAMMABLE DC POWER SUPPLY MODEL 52912/52914


SPECIFICATIONS

Model	52912	52914
Dimensions(not including connectors)	1-slot, 10x16cm	3-slot, 10x16cm
Output		
Voltage/Current/Power	Channel #1 : 0-48VDC, 0~2 Amp/ 60W Channel #2 : 0-48VDC, 0~2 Amp/ 60W	
Voltage Accuracy	0.5% of programmed value □50mV	
Voltage setting resolution	12 Bits	
Line Regulation	0.1%	
Load Regulation	0.1% (10% to 90% load change)	
Current Limit Accuracy	0.5% □50mA (12 Bits Resolution)	
Read back	Voltage : □0.2% of Reading +60mV Current : □0.5% of Reading +10mA	
Rise Time	Typical 520ms (full load)	
Efficiency	84% typical	
Measurement Function		
Maximum sampling rate	5K S/s of each channel	
Input Impedance	5k□	
Trigger sources	Software, external	
Buffer size	2K samples per channel	
Data transfers	Polling	
Sequence Function		
Trigger sources	Software, external	
Input Impedance	3.78k□	
Buffer size	256 command words per channel	
Input		
DC Input	Isolated +56VDC (dual)	-- --
AC Input (Optional A529102)	90V ~ 260V/ 47Hz ~ 63 Hz	90V ~ 260V/ 47Hz ~ 63 Hz
Software API	□VISA compatible via National Instrument's VISA 2.5 or above □20 Windows DLL's API	
Cooling	At least 15 CFM air flow is required	
PCI Data Bus	PCI V2.2 compliant, 33MHz, 32 Bits	
Operating Temperature	0□C ~ 55□C	
Operating Humidity	10% ~ 90 % relative	
Storage Temperature	-30□C ~ 70□C	
Isolation		
Channel to Channel	500V	
Channel to Chassis	500V	
Standards	□PXISA PXI 2.2 □PICMG 2.0 R3.0 CompactPCI	

All specifications are subject to change without notice.

ORDERING INFORMATION

52912: PXI/cPCI Programmable Power Supply (DC Input)
52914: PXI/cPCI Programmable Power Supply (AC Input)
A529102: AC to DC Adaptor (56Vdc)

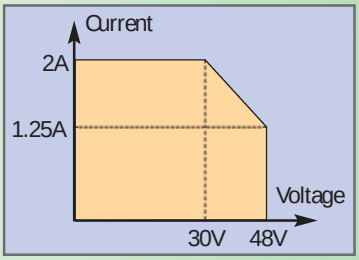

Safety Operation Area

PXI Systems Alliance

Developed and Manufactured by :
CHROMA ATE INC.
致茂電子股份有限公司
HEADQUARTERS
66, Hwa-Ya 1st Rd., Hwa-Ya Technology Park, Kuei-Shan Hsiang, Taoyuan Hsien 333, Taiwan
Tel: +886-3-327-9999
Fax: +886-3-327-8898
http://www.chromaate.com
E-mail: chroma@chroma.com.tw

U.S.A.
CHROMA ATE INC. (U.S.A.)
7 Chrysler Irvine, CA 92618
Tel: +1-949-421-0355
Fax: +1-949-421-0353
Toll Free: +1-800-478-2026

EUROPE
CHROMA ATE EUROPE B.V.
Max Planckstraat 4, 6716 BE Ede,
The Netherlands
Tel: +31-318-648282
Fax: +31-318-648288

CHINA
CHROMA ELECTRONICS (SHENZHEN) CO., LTD.
8F, No.4, Nanyou Tian An Industrial Estate, Shenzhen, China PC: 518054
Tel: +86-755-2664-4598
Fax: +86-755-2641-9620

Distributed by:

Worldwide Distribution and Service Network

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP