ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Chroma 52961* at our website: ***Click HERE***

PXI Dual Channel NANO-AMP Meter Model No. 52961




PXI Systems Alliance

The 52961 NANO-AMP Meter is a single slot PXI module designed to make fast Optical Power measurements and store the results of a sequence of Measurements. The unit has 2 channels for power measurement. Each channel is provided an electrical input connection to allow external photodiodes to be used.

The user can generate a table for result values and step rapidly through the table using the High Speed Instrument Sequencer (HSIS#) functionality. It can be used in conjunction with the 52956 Source / Measure module to provide a comprehensive test solution to the testing of optical devices such as laser diodes. The resultant table can be uploaded from the module to the test system database for analysis and is ideal for optical component test and characterization. Multiple units can be used in combination with other Chroma Photonics Instruments.

ORDERING INFORMATION

52961 : Dual Channel NANO-AMP Meter

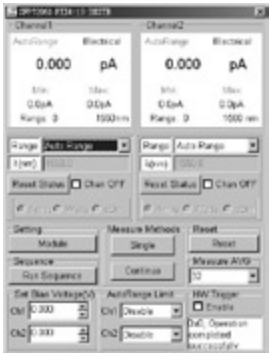

Dual Channel NANO-AMP Meter
Model 52961

KEY FEATURES

- Typical Applications
  - Any measurement of nA current within the specifications
  - Optical power measurement with external photodiode
- Dual Independent Channels

SOFTWARE FOR WINDOWS 2000 & XP

- **Soft Front Panel**
  Soft Front Panel allows control of switch functions for "bench-top instrument" use.
- **Drivers**
  Drivers based on NI-VISA®, Visual C++, Visual Basic®, LabVIEW®, LabWindows/CVI® drivers are supported
- **Install Wizard**
  Our install wizard gets you up and running in minutes!

INPUT TYPE

- Si Photo Diode
- InGaAs Photo Diode
- Electrical input (ext photodiode)

SPECIFICATIONS	
Model	**52961**
Parameter	**Electrical Input**
Minimum Input Current	15 nA
Maximum Input Current	9.5 mA
Resolution	15 bit
Accuracy	10mA : ±1% ± 2 μA
	1mA : ±1% ± 0.2 μA
	100 μA : ±1% ± 0.1 μA
	10 μA : ±3% ± 30nA
	1 μA : ±3% ± 10nA
	100nA : ±3% ± 5nA
Connector Interface	BNC
Form Factor	3U PXI
Maximum Power Consumption	10W
Channel	2 Channels
Operation Environment	Temperature : 0~40˚C Humidity : 10%~70%
Range	10mA / 1mA / 100 μA / 10 μA / 1 μA / 100nA

All specifications are subject to change without notice.
Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP