



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗


LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com



Chrislin Industries, Inc.

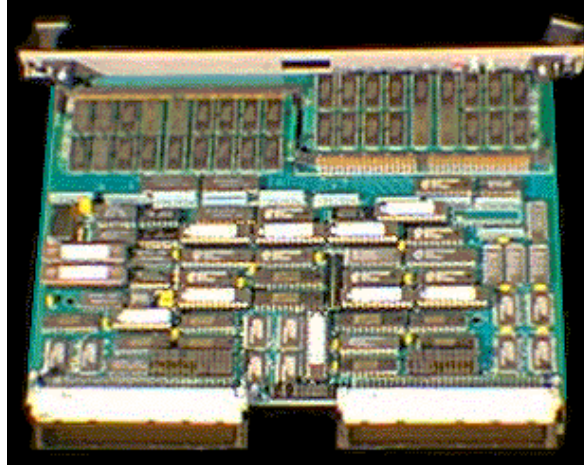

CI-VME40 SPECIFICATIONS

The CI-VME40 is a high-speed DRAM board with dual-port interfaces to the VME and VSB Busses. The CI-VME40 is optimized for Block Transfer Cycles yielding a bus transfer up to forty megabytes per second. The memory module, with cycle and access times as low as 84 nanoseconds and 25 nanoseconds during block cycles, is an excellent choice for high-speed DMA and dedicated data acquisition devices that require maximum memory transfer rates into dual-ported memories. The CI-VME40 fully supports the current VME and VSB bus specifications. Flexible address selections allow the CI-VME40 to be placed into any VME/VSB environment. The module uses 16Mbit technology DRAM chips allowing low power requirements of 2A (typical) at +5 volts.

- Up to 40MB per second bus transfer rates
- 4MB to 128MB in one 6U VMEbus slot
- VME Revision C.1 compatible
- VSB Revision C compatible
- Upgradeable memory options available
- Byte Parity Error Detection
- Addressable in 24 or 32 bit through 4 Gigabytes
- Memory start and end addresses selectable on 1MB boundaries
- LED indicators: VMEbus access, VSBbus access & Parity ERROR

CHARACTERISTIC	SPECIFICATION
CAPACITY	4, 8, 16, 32, 64, and 128 megabytes
CYCLE TIME (Write/Read)	63/84ns Block Cycle, 195/195ns Single Cycle
ACCESS TIME (Write/Read)	25/25ns Block Cycle, 90/140ns Single Cycle
WORD SIZE	8, 16, 24, or 32bits
MEMORY ADDRESSING	32 or 24bits, 4 GB maximum selectable on 512 Kbyte boundaries
CSR ADDRESSING	16 bit, selectable on 256 byte boundaries using VMEbus SHORT I/O
MODES OF OPERATION - MEMORY	READ, WRITE, READ-MODIFY-WRITE, BLOCK TRANSFERS, UNALIGNED TRANSFERS

MODES OF OPERATION - CSR	READ, WRITE
VME REV. C.1 Compatibility	SLAVE, A16, A24, A32, D8, D16, D24, D32, RMW, BLT, UAT, AD0
VSB REV. C Compatibility	SLAVE, D32, A32, SAS, ATLAS, AD0, BLT(32)
ADDRESS MODIFIERS	Responds to AM Codes 3F, 3E, 3D, 3B, 3A, 39, 0F, 0E, 0D, 0B, 0A, 09, 2D, 29, AM Codes are Programmable
REFRESH	Internal, Distributed
PARITY/ERROR Handling	Byte Parity
LED PANEL INDICATORS	RED- Parity Error, GREEN- VME, GREEN- VSB
DESIGNED TEMP. RANGE	Operating: 0 deg.C to +50 deg.C // Storage: - 20 deg.C to +70 deg.C non-condensing
POWER at 5V	2.0A typical, 2.5A maximum, 128MB option
DIMENSIONS	160mm x 233.35mm, 6U form factor



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com