

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Concurrent Technologies PP 402/041* at our website: ***Click HERE***

CompactPCI

PP 402/04x

Intel® Core™ 2 Duo Processor Single Board Computer



RoHS 2002/95/EC

END OF LIFE

APPLICATIONS

The PP 402/04x is a PC-compatible high performance, high functionality one-slot CompactPCI® single board computer supporting either the 2.16 GHz Intel® Core™ 2 Duo processor T7400 or the 1.5 GHz Intel® Core™ 2 Duo processor L7400. The board supports up to 4 Gbytes DDR2 SDRAM and a variety of interfaces, including an on-board CompactFlash™ drive and an optional on-board SATA hard disk drive. Its functionality can be further increased through the use of a PMC module. Additionally, very high-performance networking is provided by four Gigabit Ethernet links and it is fully compliant with PICMG® 2.16 (Packet Switching Backplane) specification. Full system monitoring is provided by the PICMG 2.9 compliant IPMI interface. The PP 402/04x is suitable for a range of high-performance applications in industrial control, telecomms, telemetry, scientific and aerospace markets. To simplify the board's integration many popular industry standard operating systems are supported.

HIGHLIGHTS

- 2.16 GHz or 1.5 GHz Intel Core 2 Duo processor:
  - dual-core processor
  - 667 MHz Front Side Bus
  - 64 Kbytes L1 cache
  - 4 Mbytes shared L2 cache
  - Intel® 64 Technology (64-bit computing support)
  - passive heat sink
- Single slot (for all option combinations)
- Up to 4 Gbytes of 667 MHz DDR2 DRAM
- On-board CompactFlash™/Microdrive™ interface
- Two high performance Serial ATA150 (SATA) channels:
  - optional on-board SATA disk drive (in a single slot)
- Four 10/100/1000Mbps Ethernet interfaces
- Dual Gigabit Packet Switching Backplane (PICMG 2.16)
- PMC module interface (32/64-bit at 33/66 MHz)
- 1 Mbyte of BIOS Flash EPROM
- 1 Mbyte Application Flash EPROM
- Analog and digital graphics interfaces
- CompactPCI controller:
  - operates in system slot or peripheral slot
  - 32/64-bit at 33/66 MHz CompactPCI interface
- Option to bypass CompactPCI bus (Satellite Mode)
- IPMI (Intelligent Platform Management Interface):
  - PICMG 2.9 (System Management Specification)
- PS/2 keyboard and mouse port
- 4 x USB 2.0 interfaces and 2 x RS232 serial channels
- Watchdog timer; long duration timer
- Extended temperature versions available:
  - -25°C to +70°C (E-Series)
  - -40°C to +85°C (K-Series, includes humidity sealant)
  - supporting 1.5 GHz processor
- Support for Linux® , Windows® 2000, Windows® XP, Windows® XP Embedded, Windows® Server 2003, Solaris™, LynxOS®, QNX® and VxWorks®
- Optional Transition Module for rear panel I/O

CONCURRENT TECHNOLOGIES

Concurrent Technologies Plc 4 Gilberd Court, Colchester, Essex, CO4 9WN, UK
Tel: +44 (0)1206 752626 Fax: +44 (0)1206 751116

Concurrent Technologies Inc 6 Tower Office Park, Woburn, MA 01801, USA
Tel: (781) 933 5900 Fax: (781) 933 5911

email: info@gocct.com http://www.gocct.com

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Specification

Central Processor

- 2.16 GHz Intel® Core™ 2 Duo processor T7400:-
  - ➔ uses µFC-PGA 478 (micro Flip-Chip Pin Grid Array) package
- 1.5 GHz Intel® Core™ 2 Duo processor L7400:-
  - ➔ uses µFC-BGA 478 (micro Flip-Chip Ball Grid Array) package
- common processor features are:-
  - ➔ dual-core processor
  - ➔ 667 MHz Front Side Bus
  - ➔ 64 Kbytes of primary (L1) on-die cache
  - ➔ 4 Mbytes of secondary (L2) on-die cache
  - ➔ Intel® 64 Technology (64-bit computing) support
  - ➔ no CPU fan; low power processor
- utilizes 64-bit Intel® 945GME Express chipset:-
  - ➔ uses Intel® ICH7-M DH Controller Hub

DRAM

- supporting up to 4 Gbytes 667 MHz DDR2 SDRAM:-
  - ➔ single channel or dual channel operation
  - ➔ 2 Gbytes soldered onboard giving peak bandwidth of up to 5.3 Gbytes/s
  - ➔ 4 Gbytes (SODIMM + soldered) giving peak bandwidth of up to 10.6 Gbytes/s
- accessible from processor or CompactPCI bus

Hard Disk Interfaces

- 1 x EIDE interface:-
  - ➔ supports 1x CompactFlash™ or Microdrive™ Type II drive using on-board socket
- 2 x Serial ATA150 interfaces:-
  - ➔ both channels accessible via J5 to the Rear Transition Module (RTM)
  - ➔ one channel switchable to on-board SATA disk drive (in a single slot)
  - ➔ transfer rate up to 150 Mbytes/s

Ethernet Interfaces


- four channels supporting 10 Base-T, 100 Base-TX, 1000Base-T
- 2 x front panel interfaces accessed via RJ45 connectors:-
  - ➔ implemented by 2 x Intel® 82541PI LAN controllers via 32-bit, 33 MHz PCI Bus
- 2 x rear interfaces accessed via J3:-
  - ➔ implemented by 2 x Intel® 82573L LAN controllers via x1 PCI Express® links
- support for PICMG 2.16 R1.0 - Packet Switched Backplane (PSB)

PMC Interface

- single PMC site:-
  - ➔ I/O via front panel and J5
  - ➔ 32/64-bit, 33/66/100 MHz PCI/PCI-X operation
  - ➔ 3.3V PCI signaling levels

Graphics Interface

- implemented by the Intel® 945GME:-
  - ➔ resolutions up to 2048 x 1536 @ 75Hz
  - ➔ up to 16M colors
- accessed via a 15-way high density connector on front panel or via J3 (DVI-A)
- DVI-D interface supported via J3
- DVI-I connector available on Transition Module

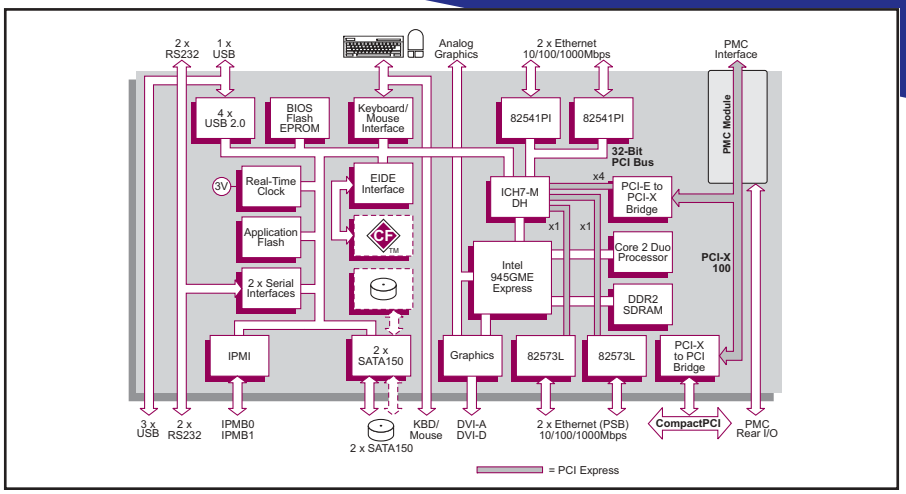

Serial Interfaces

- 2 x RS232 serial channels:-
  - ➔ accessed by 2 x RJ45 connectors on front panel or via J3/J5
- each channel supports CTS, RTS, DSR, DTR and DCD via front panel and Transition Module; RI supported via Transition Module
- 16550 compatible UART

Other Peripheral Interfaces

- keyboard and mouse interfaces via a single PS/2™ type connector on front panel or via J3
- PC-compatible RTC (Year 2000 compliant)
- 4 x USB (Universal Serial Bus 2.0) interfaces:-
  - ➔ one via front panel
  - ➔ three via J5
- watchdog timer; long duration timer
- system fan monitor; CPU temperature monitor; voltages monitor:-
  - ➔ all accessible via IPMI
- legacy speaker interface

Software Support

- support for Linux®, Windows® XP Embedded, Windows® 2000, Windows® XP, Windows® Server 2003, Solaris™, LynxOS®, QNX® and VxWorks®

Flash EPROM

- 1 Mbyte of BIOS Flash EPROM - 8-bits wide
- 1 Mbyte of Flash EPROM
- application storage available in CompactFlash

Firmware Support

- Phoenix® TrustedCore™ BIOS
- comprehensive Power-On Self-Test (POST)
- LAN boot firmware included

IPMI Interface

- PICMG 2.9 R1.0 (System Management Specification):-
  - ➔ implements the IPMB0 interface
  - ➔ implements an IPMB1 interface
- on-board Baseboard Management Controller
- supports 8 Kbytes of non-volatile memory

CompactPCI Interface

- compliant with PICMG 2.0 R3.0; 3.3V or 5V signaling levels (universal signaling support)
- 33/66 MHz; 32/64-bit interface accessed via J1/J2 connectors
- utilizes a PCI-X to PCI bridge for off-board accesses
- PICMG 2.1 R2.0 Hot Swap Specification
- operates as a System Slot controller or in a Peripheral Slot
- option to disable CompactPCI interface (Satellite Mode):-
  - ➔ receives power from CompactPCI bus
  - ➔ board can be hot swapped in this mode
- J4 connector not fitted

Electrical Specification

- typical at 2.16 GHz with 2 Gbytes DRAM:-
  - ➔ +5V@4.9A; +5% / -3%
  - ➔ +3.3V@2.7A; +5% / -3%
  - ➔ +12V@0.05A; -12V@0.05A
- +12V and -12V routed to PMC expansion slot

Safety

- PCB (PWB) manufactured with flammability rating of 94V-0

Environmental Specification

- operating temperatures:-
  - ➔ 0°C to +55°C (N-Series: 2.16 GHz, 1.5 GHz)
  - ➔ -25°C to +70°C (E-Series: 1.5 GHz)
  - ➔ -40°C to +85°C (K-Series: 1.5 GHz)
- 10% to 90% Relative Humidity, non condensing (operating)
- -40°C to +85°C (storage)
- 10% to 90% Relative Humidity, non condensing (storage)

Mechanical Specification

- 6U form-factor: 9.2 inches x 6.3 inches (233mm x 160mm)
- single-slot: 0.8inches (20.3mm)
- connectors: IEC-1076-4-101 for J1-J5
- shock: 20g, 11ms, ½ sine (operating); 30g, 11ms, ½ sine (non-operating)
- vibration: 5Hz-2000Hz at 2g, 0.38mm peak displacement (operating); 5Hz-2000Hz at 5g, 0.76mm peak displacement (non-operating)

ORDERING INFORMATION

Order Number	Product Description (Hardware)
PP 402/041-xy	1.5 GHz Core Duo processor L7400
PP 402/042-xy	2.16 GHz Core Duo processor T7400
AD PP4/003-20	RTM I/O: PMC, Ethernet, SATA, USB, RS232, DVI-I, KBD, MSE
AD 110/001-z1	2.5 inch SATA Hard Disk Drive assembly

Replace the order number suffix (xy) with selections from the following:

where x =	where y = memory size
1 - Ethernet via rear panel	1 - reserved
2 - Ethernet via PICMG 2.16	2 - reserved
	3 - 2 Gbytes, single channel
	4 - reserved
	5 - 4 Gbytes, dual channel

For z options please contact your local sales office

For extended temperature, 1.5 GHz E or K-Series, please contact your local sales office

All companies and product names are trademarks of their respective organizations
Specification subject to change; E and OE. RoHS 2002/95/EC compliant.

Datasheet Code 1551/0408
© Concurrent Technologies 2008

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP