

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction


All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

VXS

VX 511/06x
N, E, K - Series

Intel® Core™ 2 Duo Processor Dual PMC VITA 41.4 Controller

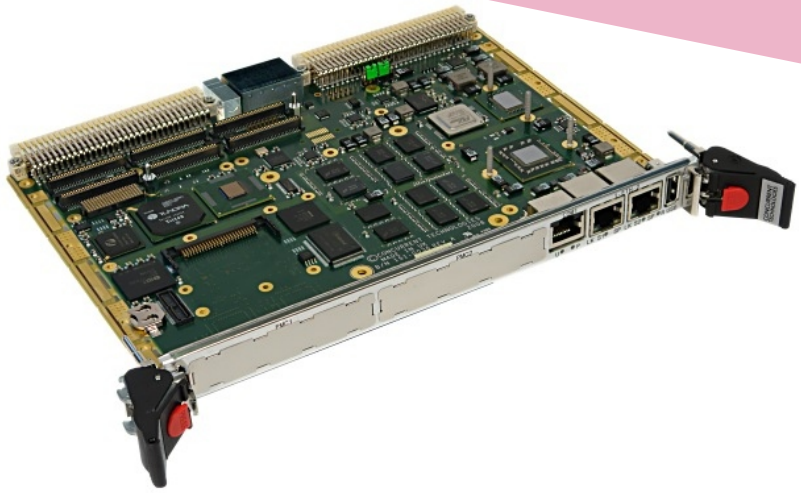

APPLICATIONS

The VX 511/06x is a PC-compatible high performance VXS/VME processor board supporting the Intel® Core™ 2 Duo processor up to 2.26 GHz, and the Intel® GS45 mobile class chipset with up to 6 Gbytes of DDR3-1066 SDRAM. This single slot board features two PMC (with an XMC) sites, and a variety of interfaces including an option for an on-board SATA300 drive, plus a CompactFlash® site. The board supports VITA 41.4 dual x4 PCI Express® backplane fabric interfaces and VITA 41.6 Gigabit IEEE 802.3 (1000 Base-Bx) ports. The VX 511/06x is suitable for a range of applications within the defense, industrial control, telecomms, telemetry, scientific and aerospace markets. For harsher environments, extended temperature, ruggedized air-cooled and ruggedized conduction-cooled versions are supported. To simplify integration, many industry standard operating systems are supported.

HIGHLIGHTS

- 2.26 GHz or 1.86 GHz Intel® Core™ 2 Duo processor:
  - dual-core processor
  - 1066 MHz Front Side Bus
  - 6 Mbytes L2 cache shared between cores
  - Intel® 64 Technology (64-bit computing)
- Up to 6 Gbytes of DDR3-1066 SDRAM
- 2 x SATA300 interfaces via P2 rear I/O with optional on-board disk drive
- CompactFlash® socket on-board
- 2 x PMC (including an XMC) module interfaces:
  - 1 x 32-bit, 33MHz PMC site
  - 1 x 32/64-bit, 33/66MHz PCI/PCI-X™ site
  - 1 x XMC module interface (x8/x4 PCI Express™)
- Graphics, keyboard and mouse interfaces
- 2 x serial channels and 3 x USB 2.0 interfaces
- 2 x 10/100/1000Mbps Ethernet channels via front panel
- 4 Mbyte BIOS SPI Flash EPROM
- Optional VXS P0 connector supporting fabric interfaces:
  - dual x4 PCI Express links, data plane (VITA 41.4)
  - dual 1000 Base-Bx ports, control plane (VITA 41.6)
- VME64/VME320 interface supporting A32/A24/A16/D64/D32/D16/D8(E0), MBLT64, 2eSST
- Watchdog timer; Long Duration Timer
- Single slot
- Extended temperature versions:
  - -25°C to +70°C (E-Series)
  - -40°C to +85°C (K-Series, includes humidity sealant)
- Ruggedized air-cooled version (RA-Series):
  - -40°C to +75°C, conformally coated
  - see separate VX 511/06x-RA datasheet
- Ruggedized conduction-cooled version (RC-Series):
  - conduction-cooled to ANSI/VITA 30.1-2002
  - -40°C to +85°C, conformally coated
  - see separate VX 511/06x-RC datasheet
- Optional Built-In Test (BIT) support:
  - Power-on BIT, Initiated BIT, Continuous BIT
- Support for Intel® Active Management Technology (AMT)
- Support for Linux®, Windows® 7, Windows® Embedded Standard 7, Windows® XP, Windows® XP (64-bit), Windows® XPE, Windows® 2000, VxWorks®, QNX®, Solaris™ and LynxOS®

CONCURRENT TECHNOLOGIES

Concurrent Technologies Plc 4 Gilberd Court, Colchester, Essex, CO4 9WN, UK
Tel: +44 (0)1206 752626 Fax: +44 (0)1206 751116

Concurrent Technologies Inc 6 Tower Office Park, Woburn, MA 01801, USA
Tel: (781) 933 5900 Fax: (781) 933 5911

email: info@gocct.com http://www.gocct.com

Specification

Central Processor
- 2.26 GHz Intel® Core® 2 Duo SP9300 or 1.86 GHz Intel Core 2 Duo SL9400 processor
- common processor features:-
  - → dual-core CPU
  - → 1066 MHz Front Side Bus
  - → 6 Mbytes of shared Level 2 on-die cache
  - → Intel® 64 Technology (64-bit computing)
  - → uses FC-BGA 956 (micro Flip-Chip Ball Grid Array) package
- utilizes Intel® GS45 mobile class chipset:-
  - → uses Intel® ICH9M-E I/O Controller Hub
- provision for XDP debug port

DRAM
- supports up to 6 Gbytes DDR3-1066 SDRAM:-
  - → soldered SDRAM
  - → peak bandwidth of 8 Gbytes/s
- accessible from processor or VME bus

Fabric Interfaces
- dual x4 PCI Express® data plane (VITA 41.4):-
  - → implemented by PLX 8624 PCI Express switch via x8 PCI Express link
- dual 1000 Base-Bx control plane (VITA 41.6):-
  - → implemented by Intel® 82576EB Ethernet Controller via x4 PCI Express link
- fabric interfaces via optional VXS P0 connector

Ethernet Interfaces
- two interfaces supporting 10/100/1000 Mbps:-
  - → implemented by Intel® 82567LM Ethernet Controller via x1 PCI Express® link
  - → implemented by Intel® 82574L Ethernet Controller via x1 PCI Express® link
- Intel® 82567LM Gigabit Ethernet controller supports Intel AMT
- both interfaces accessed via front panel


Mass Storage Interfaces
- 2 x SATA300 channels via P2 rear I/O
- optional on-board SATA300 drive
- EIDE interface supports on-board CompactFlash™ socket

PMC/XMC Interfaces
- 2 x PMC sites (1 includes an XMC interface)
- PMC site 1 supports:-
  - → 32/64-bit, 33/66/133 MHz PCI/PCI-X
  - → 3.3V or 5V signaling
  - → XMC interface supports x8 PCI Express link
  - → front panel I/O and PMC (Pn4) I/O via P2
- PMC site 2 supports:-
  - → 32-bit, 33MHz PCI only
  - → 3.3V or 5V signaling
  - → front panel I/O

Graphics Interface
- implemented by Intel GS45 mobile chipset
- analog VGA accessed via P2 rear I/O
- resolutions up to 2048 x 1536 @ 16M colors

Serial Interfaces
- 2 x serial channel interfaces:-
  - → 1 x RS232 accessed via RJ45 on front panel
  - → 1 x RS232 via P2 connector
- 16550 compatible UARTs

Software Support
- support for Linux®, Windows® 7, Windows® Embedded Standard 7, Windows® XP (64-bit), Windows® XP, Windows® XPE, Windows® 2000, VxWorks®, QNX®, Solaris™ and LynxOS®
- Intel® Active Management Technology (AMT)

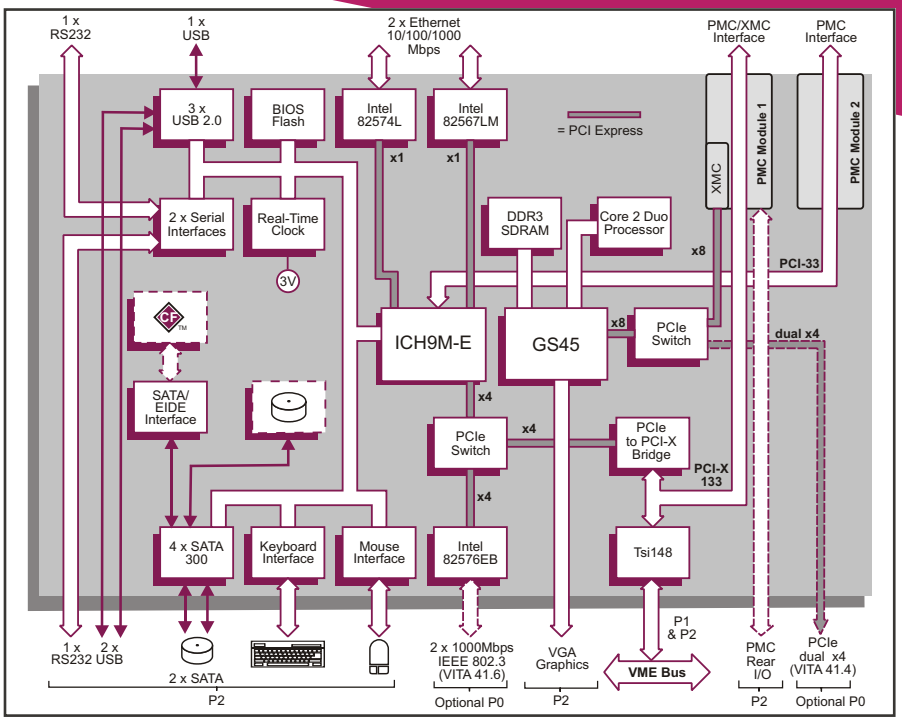

BIOS EPROM
- 4 Mbyte of BIOS SPI Flash EPROM

Firmware Support
- Phoenix® TrustedCore® BIOS
- comprehensive Power-On Self-Test (POST)
- LAN boot firmware included

Built-In Test (BIT) Support (optional)
- Power-on BIT (PBIT)
- Initiated BIT (IBIT)
- Continuous BIT (CBIT)

Other Peripheral Interfaces
- PC-compatible Real Time Clock
- 3 x USB 2.0 interfaces:-
  - → 1 via connector on front panel
  - → 2 via P2 connector
- keyboard and mouse interfaces via P2
- watchdog timer
- 1 x 32-bit Long Duration Timer with processor interrupt capability

VME/VXS Interface
- compatible with VME64x and VXS:-
  - → P1 and P2 connectors compatible with VME64x and VXS systems
  - → P0 connector compatible with VXS systems
- optional VXS P0 provides VITA41.x fabric interfaces
- VME bus interface implemented using Tundra® Tsi148 PCI-X VME64/VME320 bridge
- VME Master/Slave
- A32/A24/A16/D64/D32/D16/D8(EO)/MBLT64, 2eSST support
- auto system controller detect
- full interrupter/interrupt handler support

Safety
- PCB (PWB) manufactured with flammability rating of 94V-0

Electrical Specification
- requires 5V supply only
- +5V @ 8.0A (typical at 2.26GHz with 3 GBytes DRAM);
- 3.3V, +12V and -12V supplies not utilized
- voltage +5/-3%

Environmental Specification
- operating temperatures:-
  - → 0°C to +55°C (N-Series)
  - → -25°C to +70°C (E-Series, 1.86 GHz only)
  - → -40°C to +85°C (K-Series, 1.86 GHz only)
- storage temperature: -40°C to +85°C
- 5% to 95% Relative Humidity, non condensing (operating or storage):-
  - → K-Series includes humidity sealant
- ruggedized versions, see separate datasheets:-
  - → conduction-cooled: VX 511/06x-RC
  - → air-cooled: VX 511/06x-RA

Mechanical Specification
- 6U form-factor
- single slot, front panel width 0.8 inch (20.3mm)
- utilizes 160-way connectors for P1 and P2
- optional VXS P0 connector
- IEEE 1101.10 handles
- shock: 20g, 11ms, ½ sine
- vibration: 5Hz-2000Hz at 2g, 0.38mm peak displacement

ORDERING INFORMATION

Order Number	Product Description (Hardware)	For the order number suffix (xy) options please contact your local sales office: Where x = P0 configurations	Where y = SDRAM size
VX 511/062-xy	1.86 GHz Core 2 Duo processor, Dual PMC, VXS/VME SBC	x - VXS P0 configuration	y - up to 6 Gbytes SDRAM
VX 511/063-xy	2.26 GHz Core 2 Duo processor, Dual PMC, VXS/VME SBC		

For accessories please contact your local sales office.
For extended temperature E and K-Series, or ruggedized RA and RC-Series, please contact your local sales office.

All companies and product names are trademarks of their respective organizations.
Specification subject to change; E and OE. RoHS 2002/95/EC compliant.

Datasheet Code 1579/0810
© Concurrent Technologies 2010

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP