ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Cosel LDA150W-48* at our website: ***Click HERE***

LDA SERIES POWER SUPPLY

LDA150W

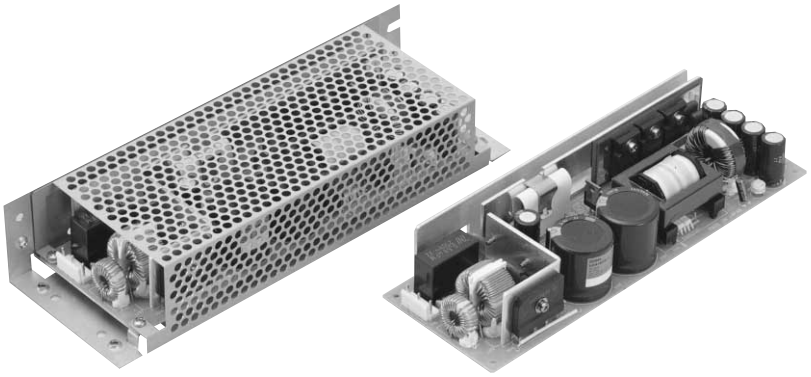

- High quality and cost effectiveness
- Small and compact PCB construction
- Autoranging voltage (AC85~132V/AC170~264V)
- UL, recognized, TÜV approved,CSA certified
- Built-in inrush current, overcurrent and overvoltage protection circuits
- Two-year warranty

■ ORDERING INFORMATION

LDA150 □ -5- □

- Optional:EX. With chassis and cover:SN, With voltage adjuster:Y
- Output voltage
- (W:Autoranging input, B: Only for 200V input)
- Output wattage
- Series name

SPECIFICATIONS

	MODEL		LDA150W-3 LDA150B-3	LDA150W-5 LDA150B-5	LDA150W-9 LDA150B-9	LDA150W-12 LDA150B-12	LDA150W-15 LDA150B-15	LDA150W-18 LDA150B-18	LDA150W-24 LDA150B-24	LDA150W-24-H	LDA150W-30 LDA150B-30	LDA150W-48 LDA150B-48
INPUT	VOLTAGE/CURRENT		AC85~132V/170~264V 1φ / 3.6A typ (ACIN 100V,Io=100%) 2.0A typ (ACIN 200V,Io=100%)									
	FREQUENCY		47~440Hz									
	EFFICIENCY		75%typ	79%typ	79%typ	82%typ	83%typ	84%typ	85%typ	85%typ	85%typ	82%typ
	INRUSH CURRENT		30A typ (ACIN 100/200V, Io=100%) (At cold start)									
	LEAKAGE CURRENT		0.75mA max (60Hz, according to UL, CSA, VDE and DENTORI)									
OUTPUT	VOLTAGE	[V]	3	5	9	12	15	18	24	24	30	48
	CURRENT	[A]※1	30	30	17	12.5	10	8.5	6.3	6.3 (10)	5	3
	LINE REGULATION	[mV]	20 max	20 max	36 max	48 max	60 max	72 max	96 max	96 max	120 max	192 max
	LOAD REGULATION	[mV]	40 max	40 max	100 max	100 max	120 max	120 max	150 max	150 max	180 max	240 max
	RIPPLE [mVp-p]	0~+50 °C	80 max	80 max	120 max	120 max	120 max	120 max	120 max	220 max	120 max	150 max
		−10~0 °C	140 max	140 max	160 max	160 max	160 max	160 max	160 max	260 max	160 max	200 max
	RIPPLE NOISE [mVp-p]	0~+50 °C	120 max	120 max	150 max	150 max	150 max	150 max	150 max	250 max	150 max	400 max
		−10~0 °C	160 max	160 max	180 max	180 max	180 max	180 max	180 max	280 max	180 max	600 max
	TEMPERATURE COEFFICIENT	[mV]	60 max	60 max	120 max	150 max	180 max	200 max	290 max	290 max	360 max	560 max
	DRIFT	[mV]※2	20 max	20 max	36 max	48 max	60 max	72 max	96 max	96 max	120 max	192 max
	START-UP TIME	[mS]	200max (ACIN 100V, Io =100%)									
	HOLD-UP TIME	[mS]	10typ (ACIN 85V, Io=100%) , 20 typ (ACIN 100V, Io =100%)									
	OUTPUT VOLTAGE ADJUSTMENT RANGE	[V]※3	2.85~3.6	4.5~5.5	Fixed							
PROTECTION CIRCUITS	OVERCURRENT PROTECTION		Works over 105% of rating (−H:peak) and recovers automatically									
	OVERVOLTAGE PROTECTION		4.00~5.25V	Works at 115% ~140% of rating								
ISOLATION	INPUT-OUTPUT		AC3,000V, 1minute, Cutoff current= 10mA, DC500V, 50MΩ min. (At Room Temperature)									
	INPUT-FG		AC2,000V, 1minute, Cutoff current= 10mA, DC500V, 50MΩ min. (At Room Temperature)									
	OUTPUT-FG		AC 500V, 1minute, Cutoff current=100mA, DC500V, 50MΩ min. (At Room Temperature)									
ENVIRONMENT	OPERATING TEMP. AND HUMID.		−10~+60℃, 20~90%RH (Non condensing) (Refer to DERATING CURVE)									
	STORAGE TEMP. AND HUMID.		−20~+75℃, 20~90%RH (Non condensing)									
	VIBRATION		10~55Hz, 2G, 3 minutes period, 60 minutes each along X, Y and Z axis									
	IMPACT		20G, 11mS, once each X, Y and Z axis									
SAFETY AND NOISE REGULATIONS	SAFETY		Recognized UL1950, approved EN60950, VDE0160, certified CSA C22.2 No.234,complies with DENTORI and IEC950									
	CONDUCTED NOISE		Complies with FCC−B, Vfg243/91 and VCCI 2									


※1 Peak load can be operated when the total wattage is within rated wattage(24V:151.2W)and less than 10 seconds(within the rated current for the average current).
※2 The drift is a change at 25℃ of ambient temperature and 30 minutes~8 hours after the input voltage applied at rated input/output.
※3 "Y" which can be adjusted the output is available as optional.
※ Avoid prolonged use under over-load.
※ Parallel operation with other model is not possible.
※ When units are operated with chassis/case cover, derating is required.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

MODEL	LDA150W-3 LDA150B-3	LDA150W-5 LDA150B-5	LDA150W-9 LDA150B-9	LDA150W-12 LDA150B-12	LDA150W-15 LDA150B-15	LDA150W-18 LDA150B-18	LDA150W-24 LDA150B-24	LDA150W-24-H	LDA150W-30 LDA150B-30	LDA150W-48 LDA150B-48
MAX OUTPUT WATTAGE	90W	150W	153W	150W	150W	153W	151.2W	151.2W	150W	144W
DC OUTPUT	3V30A	5V30A	9V17A	12V12.5A	15V10A	18V8.5A	24V6.3A	24V6.3(10)A	30V5A	48V3A

( ) Peak

■EXTERNAL VIEW

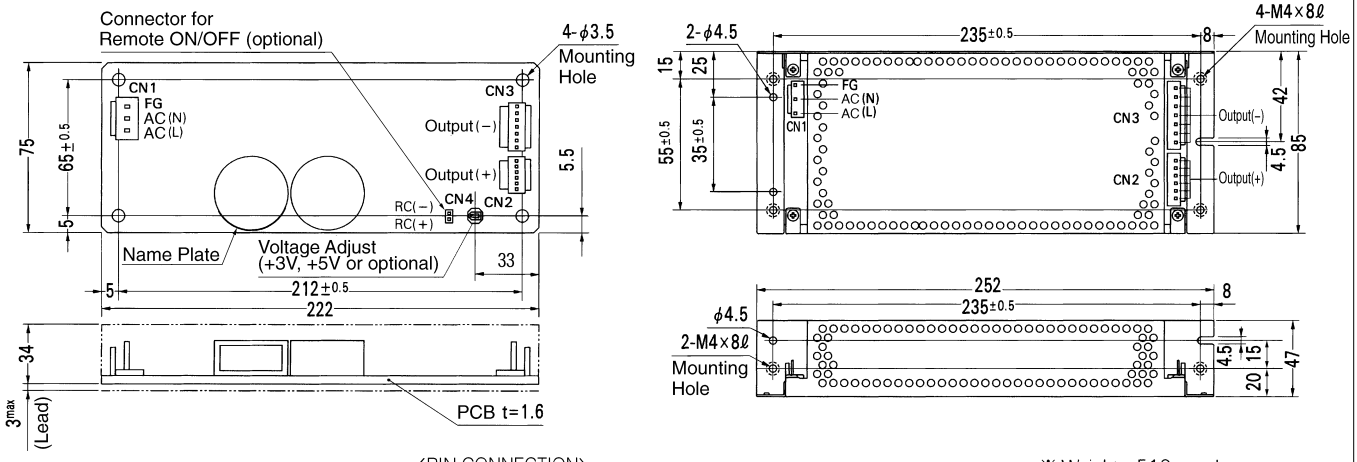

I/O Connector		Mating Connector (Terminal)	
CN1	B3P5-VH	VHR-5N	SVH-21T-1.1 or SVH-21T-P1.1
CN2	B6P-VH	VHR-6N	SVH-21T-1.1 or SVH-21T-P1.1
CN3	B7P-VH	VHR-7N	SVH-21T-1.1 or SVH-21T-P1.1
CN4	B2B-XH-A	XHP-2	BXH-001T-P0.6 or SXH-001T-P0.6

(Mfr: J.S.T.)

〈PIN CONNECTION〉

	Pin No.	Input
CN1	1	AC(L)
	2	
	3	AC(N)
	4	
	5	FG


	Pin No.	Output
CN2	1~6	+V
CN3	1~7	−V

	Pin No.	Remote ON/OFF
CN4	1	RC(+)
	2	RC(−)


※Keep drawing current per pin below 5A for CN2, CN3.

※ Weight : 510g or less (Without chassis and cover)
※ Tolerance : ±1
※ Dimensions in mm.
※ PCB Material : Glass composite (CEM3)
※ Chassis and cover is optional.
※ Chassis and cover is not available to remote ON/OFF unit.


■STATIC CHARACTERISTICS (LDA150W-5)

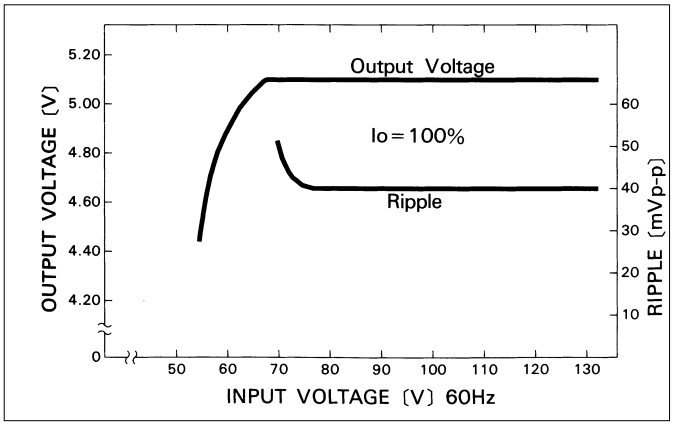


■RISE TIME & FALL TIME (LDA150W-5)

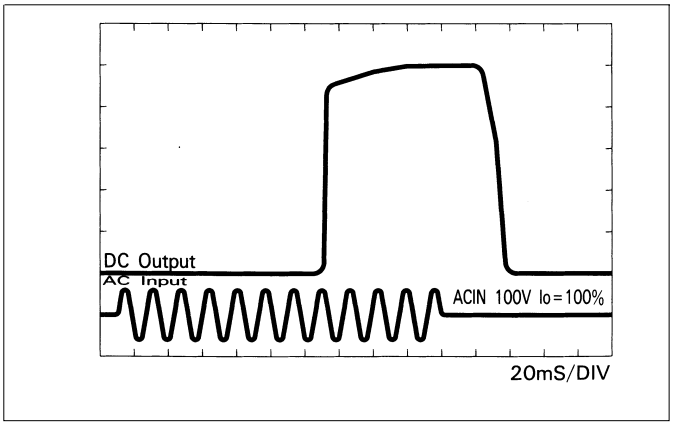

■OVERCURRENT CHARACTERISTICS (LDA150W-5)

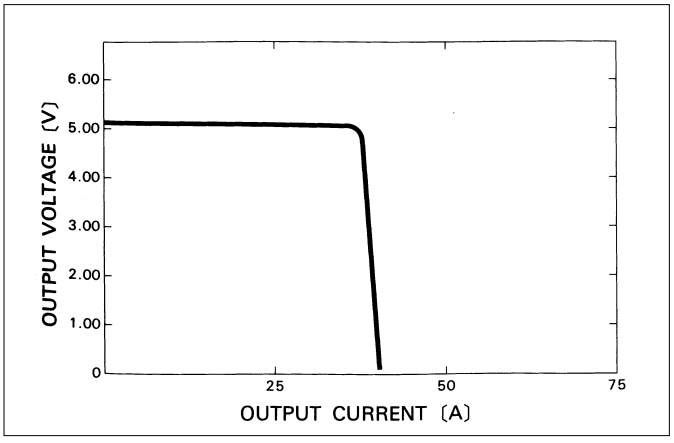

■DERATING CURVE

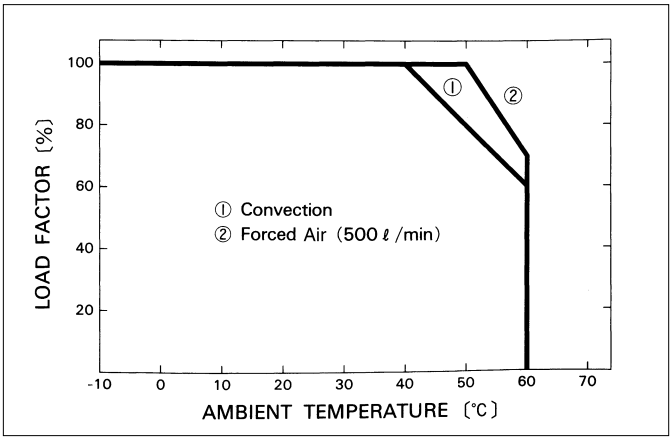

LDA

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP